

Quality management
certified according to
DIN EN ISO 9001

Energy management
certified according to
DIN EN ISO 50001

Environmental management
certified according to
DIN EN ISO 14001



Catalogue
2026/2027



ALLROUND SCAFFOLD- ING

TABLE OF CONTENTS

01 Company 4

02 Allround Scaffolding..... 6

• Software for scaffolding construction.....	8
• Scaffolding base plates.....	10
• Vertical support elements.....	12
• Modular access system AGS for facades.....	14
• Horizontal support elements.....	18
• Diagonal bracing	22
• U-Scaffolding decks.....	24
• O-Scaffolding decks.....	28
• Steel plank, cover plates.....	30
• Toe boards.....	32
• Couplers, accessories and anchoring.....	34
• Brackets.....	36
• Pedestrian protection, roof edge protection, scaffolding enclosure.....	38
• Platform stairway, Comfort stairway	40
• Modular stairway, outside access, construction stair- tower 200.....	42
• Stairtowers 500 and 750	44
• System handrail, Step cover	46
• Allround modular stairway.....	48
• Lattice beams.....	49
• Allround FW System.....	50
• Bridging system.....	52
• Aluminium FlexBeam.....	54
• Allround Wall Bracket	59
• Aluminium TwixBeam	60
• Shoring TG 60.....	64
• Heavy-duty column / Heavy Duty Tower.....	66
• Heavy Duty Tower XL.....	67
• Allround Modular stairtower	68
• Compact stairtower	68
• Hollow wall bracket	69
• Fall protection.....	70
• Safety gear.....	72
• Railing clamp.....	73
• Mobile scaffolding, pallets, tools	74

03 Index76

Subject to technical modification. Component weights are subject to fluctuations due to tolerances and may therefore diverge from what is specified.

Steel components are hot-dip galvanized according to EN ISO 1461 and DAST guideline 022. Connection parts or other small pieces can be galvanized according to EN ISO 4042.

Our deliveries shall be made exclusively in accordance with our at the conclusion of contract valid General Terms of Sale. These include the following provisions: The place of performance is Gueglingen-Eibensbach. Title to the delivered goods shall be retained until full payment has been made. The fully GTC you can find here: gtc.layher.com

Please request the specific instructions for assembly and use when ordering. Protected by copyright. Not to be reproduced, either in whole or in part. Misprints and errors excepted.



MYLAYHER

Search. Order. Inform.

Register: myLayher.layher.com



Digital product catalogue

- Clear and intuitively arranged product structure down to the detailed range
- Product details such as prices (list prices and your individual purchase prices), live availability check, associated technical documentation and further specifications and product details

Online ordering option

- Selection of desired delivery date and delivery location or collection from the service centre
- Storage of various shopping baskets for project-related orders

Further options

- View and download technical documents such as assembly and usage instructions, technical brochures or building authority approvals
- Display of stored conditions and order history (delivery notes, invoices and open orders)

01

THE
COM
PANY

Quality made by Layher comes from Gueglingen-Eibensbach. Our company has set down deep local roots since it was established. Right up until today, development, production and management are all in one place. This proximity creates advantages that benefit our customers all over the world: short distances, short response times, controlled quality and production.

Layher's history began more than 80 years ago with the manufacture of ladders and other agricultural equipment. Since then, Layher has significantly influenced the market for scaffolding and access technology. Today, more than 2,700 employees create more possibilities for our customers every day with a comprehensive range of services, a sustainable training programme and customer proximity. In 50 countries worldwide.

Layher lives **economic and ecological sustainability** in all process steps. Social responsibility towards employees, customers and society takes centre stage.



Headquarters in Gueglingen-Eibensbach



Plant 2 in Gueglingen



Plant 3 in Cleebronn



Discover the world of
Layher in its company film.


WITH LAYHER, THERE ARE MORE POSSIBILITIES.

A comprehensive range of innovative products,
application-orientated solutions and comprehensive services
for easy, fast and safe working at height.

02

ALL
ROUND
SCAFF-
FOLD-
ING


The Allround Scaffolding Lightweight from Layher with its proven wedge connection technology is in use all over the world. The original offers impressive versatility, especially for the most difficult geometries and anchoring conditions. Whether as work scaffolding, safety scaffolding or shoring, as internal scaffolding, mobile scaffolding or deck scaffolding: There is nothing that you cannot solve quickly, cost-effectively and safely with the Layher Allround system.

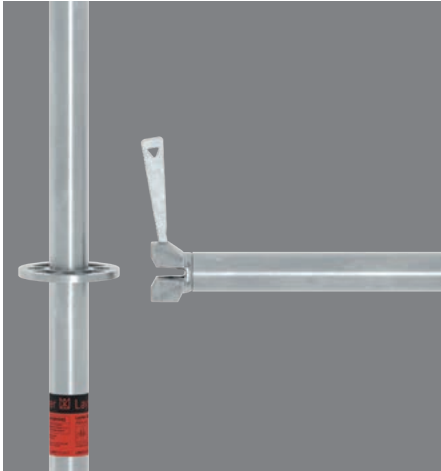

Allround equipment features a simple, unique and bolt-free connection technology. When the wedge head is pushed over the rosette, the wedge drops automatically into the recess thanks to the innovative AutoLock function and is immediately secured against being moved or falling out.




A hammer blow on the wedge transforms the positive connection into a superbly strong non-positive one. (Use 500 g metal hammer until the blow bounces off). The end face of the wedge head is now positioned precisely at the standard.

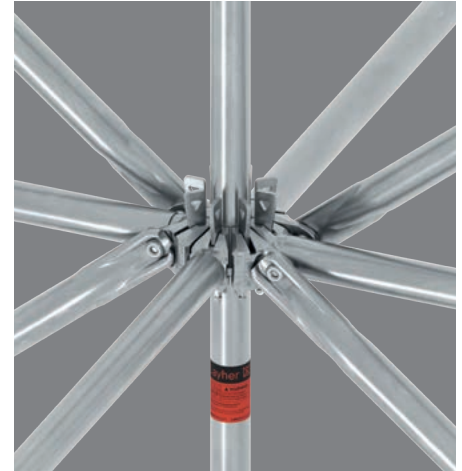

The result of superior engineering.

Up to eight connections can be made in the structurally ideal Allround connector, on one level and at various angles. Attachment is possible at the standard dimension intervals of 50 cm on all Allround standards. The flat rosette prevents clogging by dirt of any type.

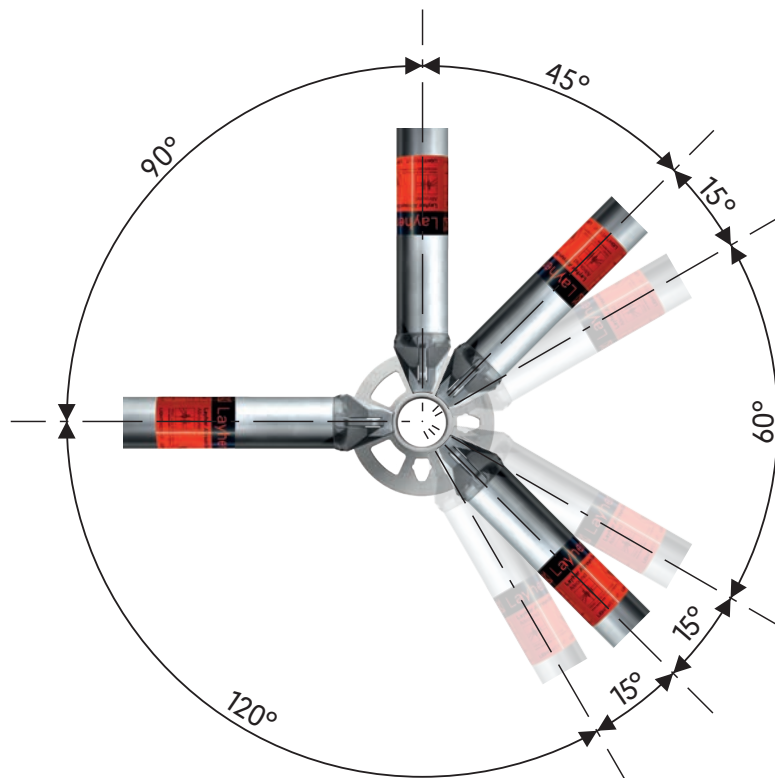

Ingenious connection technology.

The four small punched-out openings in the rosette automatically centre the ledger at right angles – the four large openings permit alignment with free selection of the angle.

The robust and inexpensive Allround Scaffolding made of steel (hot-dip galvanised) is primarily used in structural and demanding scaffolding construction.

High and ideal power transmission with low weight. The wedge head and standard are matched to each other in such a way that the ledger loads to be transmitted are transferred directly to the centre of the standard.

The Layher Allround Scaffolding has the following approvals: Z-8.22-64, Z-8.22-64.1, Z-8.22-939, Z-8.22-949, Z-8.1-919, Z-8.1-969 and other international approvals. Standard designs for the AGS System are regulated by type test TP-21-012. This type test currently contains 20 statically proven assembly variants.

The Benefits for You:

- Time-saving assembly and disassembly thanks to screwless connection technology.
- No parts to lose.
- Low material usage.
- Maintenance-free, always ready for use and durable hot-dip galvanised components.
- Low weight of the individual parts.
- Sophisticated parts programme.
- Impressive cost-effectiveness and flexibility.

Software for scaffolding construction

Time and material are crucial factors in scaffolding construction. To make the most efficient use of both, the Layher range includes the practical LayPLAN scaffolding planning software.

With the several software packages LayPLAN CLASSIC and LayPLAN CAD, it is possible to plan scaffolding structures from simple, small facade scaffolding up to complex industrial scaffolding or protective roofs and grandstands.

LayPLAN CLASSIC


With the LayPLAN CLASSIC modules for Allround Scaffolding and SpeedyScaf, individualised scaffolding solutions can be configured quickly and easily: whether they're for circular or facade scaffolding made from SpeedyScaf, for birdcage scaffolding and free-standing towers made from Allround Scaffolding, or for structures with temporary roofs. Once the dimensions and the required assembly variant have been entered, LayPLAN CLASSIC delivers within seconds a scaffolding proposal, including anchoring, bracing and side protection. During the design phase, the overall length, standing heights and areas are continuously calculated and displayed to reflect the current plan. A material list can also be created at the click of a button and then printed out, together with an assembly sketch for the area to be enclosed in scaffolding plus the total weight. This also helps with the logistics – the required material is guaranteed to be there where it's needed. Scaffolding erectors benefit from more certainty when planning the commercial and technical details, from optimised use of stocks, and from full cost transparency at every stage of the project.

After finalisation of the scaffolding proposal, the LayPLAN Material Manager provides you with complete lists of required parts to ensure you always have precisely the material you need at the site.


LayPLAN CAD

For more complex structures, LayPLAN CAD is available. This is a plug-in for Auto-desk AutoCAD. It enables 3-dimensional planning of scaffolding structures of all types.


Thanks to integration into the LayPLAN system, the basic planning can be handled in automated form using the proven LayPLAN CLASSIC.

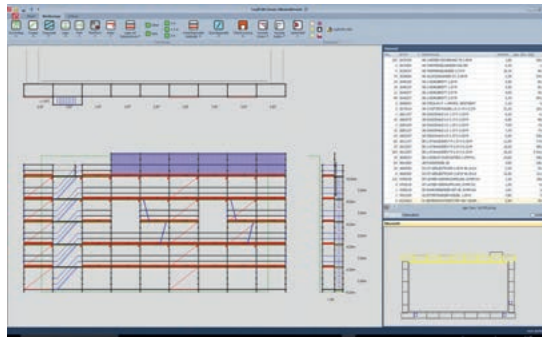


Allround Facade Scaffolding

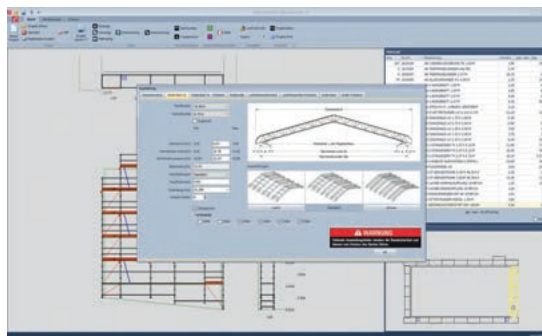

Weather protection roof on Allround support Scaffolding

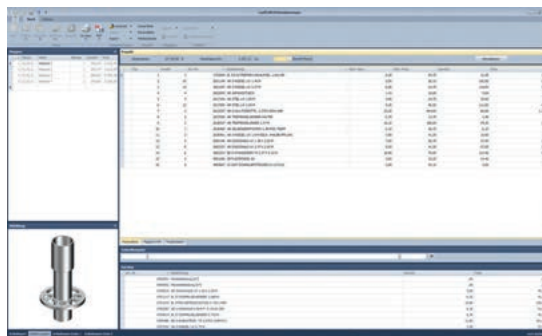

Component images LayPLAN Material Manager

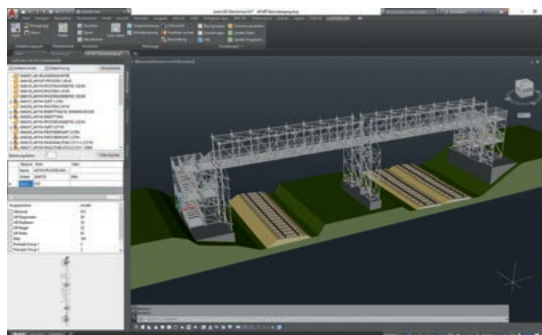

Planning of individualised scaffolding structures in LayPLAN CAD

Project data can be quickly recorded using input masks, ensuring a time saving for every order. The data are then simply exported into the AutoCAD program, which offers further possibilities for detailed 3D planning. A visual collision check is possible with the aid of volume rendering. Using a convenient search function with preview image, scaffolding planners will find not only an extensive library of individual Layher parts, but also assemblies already prefabricated for even faster design work. The detailed drawings can then be printed out. A transfer to visualisation or animation software is also possible without any problem. This allows projects not only to be planned economically and also adapted precisely to actual requirements, but also to be presented professionally to customers.



LayPLAN SUITE



LayPLAN CLASSIC



LayPLAN CAD



LayPLAN MATERIALMANAGER



LayPLAN TO RSTAB



Learn more on YouTube
Layher SIM

Learn more in the Brochure "System Solutions Digitalisation and Software".

Pos.	Description	Ref. No.
1	LayPLAN CLASSIC scaffolding configurator for SpeedyScaf, Allround Scaffolding, weather protection roofs and rolling towers	6345.102
2	LayPLAN CAD plug-in for AutoCAD, for designing complex scaffolding in 3D and for developing scaffolding proposals from LayPLAN CLASSIC	6345.103
	plug-in for BricsCAD, for designing complex scaffolding in 3D and for developing scaffolding proposals from LayPLAN CLASSIC	6345.106
3	LayPLAN TO RSTAB To use LayPLAN TO RSTAB, only RSTAB 8 from Dlubal including the RS-COM interface is required. RSTAB 9 is not supported.	6345.104

Scaffolding base plates

For load transmission and ground adaption, choose between different height-adjustable **base plates 2–5** with sturdy and self-cleaning round threads, with colour and notch markings to provide protection against overwinding. Make sure that there are sufficient load-distributing surfaces. For all inclined erection surfaces, e.g. in combustion chambers or ship hulls, **swivelling base plates 60**, reinforced **4** are used. The round threads of all Layher scaffolding spindles have an outside diameter of $d=38$ mm and a pitch of 8.1 mm. The wing external dimension of the spindle nut is 205 mm. The dimensions of the foot plate are 150 x 150 mm.

The **head jack 7/8 and 10/11** accommodates wood sections or steel beams and serves to adjust height and introduce loads. The solid head jacks and base plates can be recognized by the hexagonal opening provided in them.


The **swivelling head jack 45**, solid **10** can be used to install supports (e.g. wood sections) with an inclination of up to max. 5% to the horizontal in the longitudinal and transversal directions, thus eliminating the need to level with a wedge. Greater loads can be supported thanks to the articulated mounting of the top plate and the resulting centric introduction of vertical forces into the spindles.

The **cross head jack 45**, solid **11** serves to accommodate wood sections, glued binders or steel beams in falsework and supporting scaffolding. It stabilizes the supports against tilting, and it is possible to use one or two formwork supports. Height adjustment is performed using the spindle nut. The cross head jack is suitable for all common formwork supports.

Wedge spindle swivel coupler 12 for connection of a tube $d=48.3$ mm to a scaffolding spindle at any angle.

With the **adjustment plate 13**, rigid base plates can be fully beared on inclined ground. By turning the plate, the inclination can be continuously adjusted up to 16% without reducing the load-bearing capacity.

The **Plastic underlay 14a** can be personalised with your lettering from a minimum order quantity of 408 pieces.

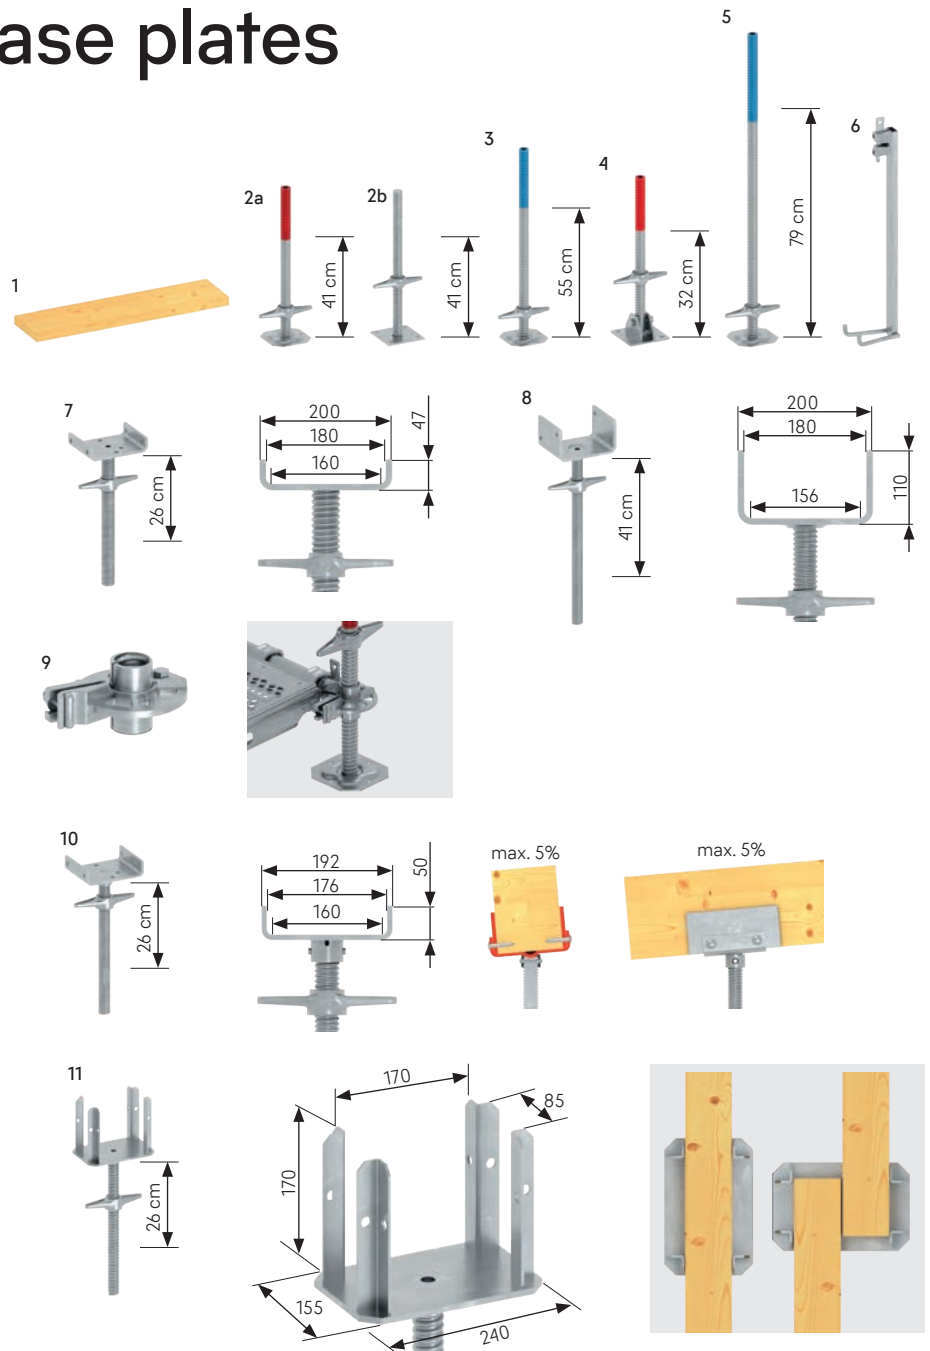


Spindle type	N_{Rd} [kN]	M_{Rd} [kNcm]	V_{Rd} [kN]
normal	97.7	83.0	36.0
reinforced	119.9	94.5	44.1
solid	288.0	157.0	106.0





The **rosette with thread**, clampable **9** can be attached to the thread of the Layher base plate or head jack. This rosette can be used, when the spindle nut is undone, for bracing in the longitudinal, transverse and diagonal directions. Up to six connections are possible.

The **spindle attachment** with wedge head **6** serves to secure the base plate and the base collar against falling out when moving scaffolding with a crane.


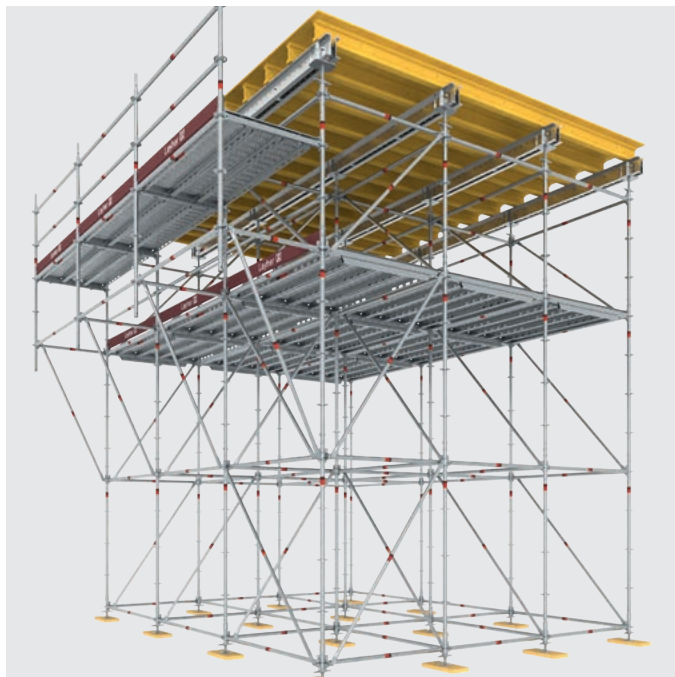


Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Scaffolding plank 45 mm high, freshly sawn, sorting category S10		1.00 x 0.24	5.2	80	3816.100
			1.50 x 0.24	7.8	80	3816.150
2	Base plate 60					
a	standard (max. spindle travel 41 cm)		0.56	3.6	200	4001.060
b	solid, without lock (max. spindle travel 41 cm)		0.58	6.7	200	5602.060
3	Base plate 80 reinforced (max. spindle travel 55 cm)		0.73	4.9	200	4002.080
4	Swivelling base plate 60 reinforced (max. spindle travel 32 cm) ensure sufficient structural strength		0.58	6.1	250	4003.000
5	Base plate 110 reinforced (max. spindle travel 79 cm)		1.10	6.5	100	4002.110
6	Spindle attachment with wedge head		0.60	2.0	150	2602.100
7	Head jack 45 solid (max. spindle travel 26 cm), width of fork 16 cm		0.45	6.6	100	5314.045
8	Head jack 60 reinforced, 18 cm (max. spindle travel 41 cm), width of fork 18 cm		0.60	8.0	100	5316.060
9	Rosette with thread clampable	19	0.12	1.7	250	2602.119
		22	0.12	1.7	250	2602.122
10	Swivelling head jack 45 solid (max. spindle travel 26 cm), width of fork 16 cm		0.45	7.3	100	5312.045
11	Cross head jack 45 solid (max. spindle travel 26 cm), opening dimensions 8.5 / 17 cm		0.45	6.9	90	5315.045
12	Wedge spindle swivel coupler			1.8	25	4735.000
13	Adjustment plate for base plate of glass-fibre-reinforced polyamide plastic, inclination 0 – 16%		d=0.30	1.3	250	4000.400
14	Plastic underlay for base plate					
a	black, with burls for easy stacking		0.26 x 0.26 x 0.02	2.4	408	4000.702
b	brown, to distribute loads, with burls for easy stacking		0.40 x 0.20 x 0.04	4.2	200	4000.701



Vertical support elements

The Original: The Allround Power Connector


- High material and manufacturing quality.
- High load-bearing capacity thanks to standardised connection values.
- Optimal force transmission thanks to precise and durable components.
- Variety of applications and flexible connection options.
- Optimal warehousing and greater application possibilities.

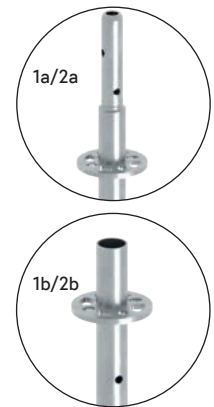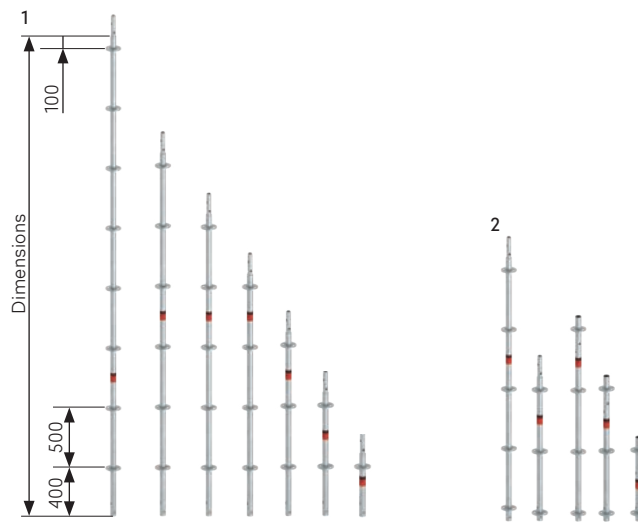

Standards are available in hot-dip galvanized steel tubing, $d=48.3$ mm, and aluminium tubing, $d=48.3$ mm, with rosettes at every 50 cm for a maximum of eight connections. Four small openings in the rosette determine right-angled connections, four larger openings permit connections at any angles. For use as suspended scaffolding or for moving by crane, only following standards may be used: **standards LW, steel, without spigot 1b** together with **spigots 5**, or **standards, aluminium, without spigots 4b** with **spigots 5** or **standards LW with integrated spigots 1a** with integrated spigot. For connecting of each standard, you can use **hinged pins 6** or **special bolts M12 x 60 mm 7**. The spigots should always be bolted into the standard with the special bolts. The **standard LW, steel 1a** handle has a shaped spigot – it allows to transmit tension forces.

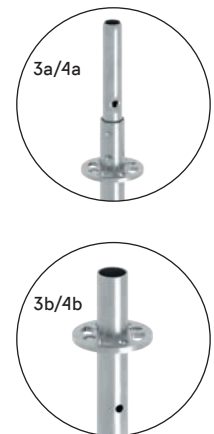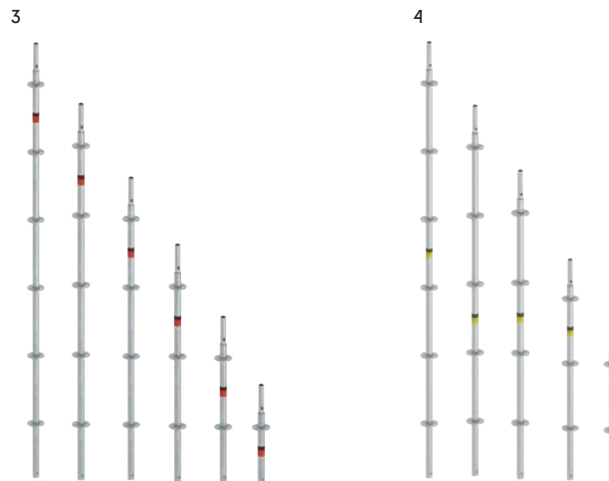

The **rosette, clampable 8**, can be connected to any point on the standard with 50 Nm – and allows up to six ledgers or diagonal braces to be connected to it. This permits flexible solutions between the rosettes even when connected to SpeedyScaf. Loading table available on request.

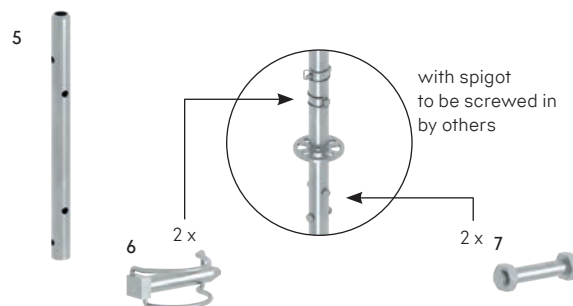

The **base collar 10a**, with rosette and the height-adjustable base plate form the scaffolding base. The vertical standard is placed into the base collar for further construction. The **base collar, extended 10b**, is required with aluminium Allround standards. For Allround rolling towers it facilitates a correct securing of the castors with locks against falling out.



The **standard lock, 0.50 m 9** can be used to bridge standard joints, for example when moving scaffolding using a crane or for suspended scaffolding. Permissible load capacity: 18.8 kN.

Pos.	Description	WS [mm]	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Standard LW					
a	steel, with integrated spigot with cross hole, for use in stand and suspended scaffolding		0.50	2.7	240	2617.050
			1.00	4.9	28	2617.100
			1.50	7.1	28	2617.150
			2.00	9.3	28	2617.200
			2.50	11.5	28	2617.250
			3.00	13.7	28	2617.300
			4.00	18.1	28	2617.400
b	steel without spigot, for scaffolding layer		0.50	2.2	300	2619.050
			1.00	4.4	28	2619.100
			1.50	6.6	28	2619.150
			2.00	8.8	28	2619.200
			2.50	11.0	28	2619.250
			3.00	13.2	28	2619.300
2	Initial standard LW					
a	steel, 1.16 m, with 3 rosettes, with integrated spigot and base collar		1.16	6.0	28	2617.116
	steel, 2.21 m, with 5 rosettes, with integrated spigot and base collar		2.21	10.0	28	2617.221
b	steel, 0.66 m, with 2 rosettes, without spigot, with integrated base collar		0.66	3.3	200	2619.066
	steel, 1.16 m, with 3 rosettes, without spigot, with integrated base collar		1.16	5.5	28	2619.116
	steel, 1.66 m, with 4 rosettes, without spigot, with integrated base collar		1.66	7.7	28	2619.166
3	Standard					
a	steel with pressed-in spigot		0.50	3.2	240	5603.050
			1.00	5.5	28	2603.100
			1.50	7.8	28	2603.150
			2.00	10.1	28	2603.200
			2.50	12.4	28	2603.250
			3.00	14.6	28	2603.300
			4.00	19.2	28	2603.400
b	steel, without spigot e.g. for receiving head jacks, or for suspended scaffolding use the spigot Ref. No. 2605.000		0.50	2.5	300	2604.050
			1.00	4.6	28	2604.100
			1.50	6.8	28	2604.150
			2.00	9.0	28	2604.200
			2.50	11.7	28	2604.250
			3.00	13.7	28	2604.300
4	Alu Standard					
a	aluminium, with pressed-in spigot		1.00	2.2	28	3200.100
			1.50	3.2	28	3200.150
			2.00	4.1	28	3200.200
			2.50	5.0	28	3200.250
			3.00	5.9	28	3200.300
b	aluminium, without spigot for suspended scaffolding		1.00	1.9	28	3209.100
			1.50	2.8	28	3209.150
			2.00	3.8	28	3209.200
			2.50	4.7	28	3209.250
			3.00	5.6	28	3209.300
5	Spigot					
	steel, for standards Ref. No. 2619.xxx and 2604.xxx		0.52	1.6	350	2605.000
	Aluminium, for standards Ref. No. 3209.xxx		0.52	0.8	250	3209.000
6	Hinged pin d=12 mm, with pan head			1.6	20	4905.668
7	Special bolt M12 x 60 mm with nut	19		4.0	50	4905.062
8	Rosette clampable	19	0.12	1.2	450	2602.019
		22	0.12	1.2	450	2602.022
9	Standard lock 0.50 m		0.58	4.0	100	2603.000
10	Base collar					
a			0.24	1.4	500	2602.000
b	extended		0.43	2.2	400	2660.000
11	Locking pin red, d=11 mm			0.1	100	4000.001

WS = wrench size LC = load class PU = packaging unit = new in the catalogue = available ex works
 = delivery time on request = only available in this packaging unit = the approval process is not yet completed


Modular access system AGS for facades

For advancing side protection without additional work steps, Layher has designed the modular access system AGS for facades. Using the **AGS standard LW 1** and the **AGS Guardrails 8**, you can create facade scaffolding using Allround Scaffolding with two-part advancing side protection – on both the inside and the outside – without the use of temporary side protection parts.

Thanks to the innovative guardrail suspension, the AGS Guardrails can be fitted from the secured level underneath, and then swung upwards together with the AGS Standard.



During assembly or dismantling, no assembly direction for the scaffolding bays has to be adhered to. The AGS Standard has the same load-bearing properties as a normal 2.00 m long Allround Standard LW. Bracing components such as longitudinal ledgers or diagonal braces can be fitted in the familiar way to the Allround rosettes. That keeps you independent and able to deal flexibly with requirements arising at the site.

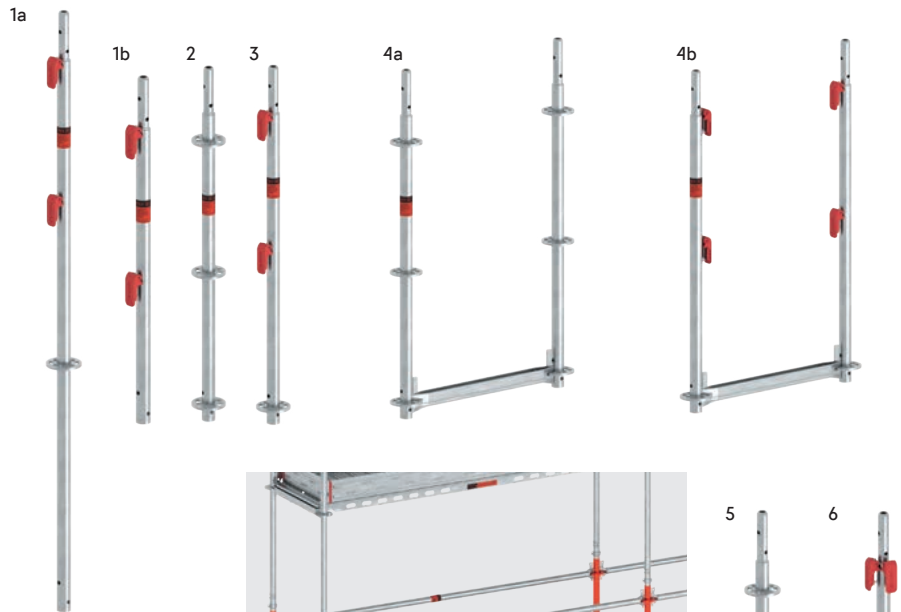


Scaffolding start with the AGS U-frame




Learn more on YouTube
AGS System

Assembly variant 1:
Outside AGS,
Inside Allround Scaffolding

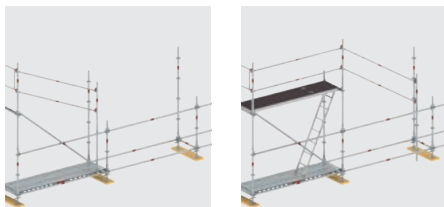

Corner variant 1:
2 standards



Corner variant 2:
3 standards



Corner variant 3:
4 standards




Assembly variant 2:
Outside and inside AGS



guardrail contour
for bay lengths
0.73 m to 1.40 m



guardrail contour
for bay lengths
1.57 m to 3.07 m

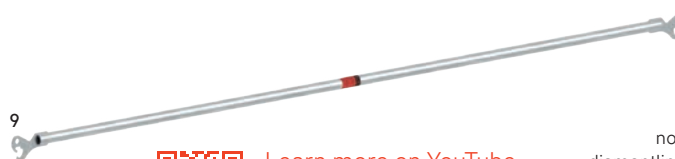

no subsequent
dismantling is possible



Learn more on YouTube
AGS guardrail Fixx



Learn more on YouTube
AGS guardrail Mixx

subsequent dismantling
possible with
special tool





11



Pos.	Description		Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	AGS standard LW					
a	AGS standard for advanced side protection on facade scaffolding		2.00	8.0	28	2602.065
b			1.00	4.1	50	2602.029
2	Initial standard LW steel, 1.16 m, with 3 rosettes, with integrated spigot and base collar		1.16	6.0	28	2617.116
3	AGS initial standard LW with integrated spigot, with 1 rosette and 2 AGS safety levers for quick scaffolding base assembly without base collar – suitable if a full stiffening with Allround ledgers on 1 m height is not necessary e.g. for low scaffolding heights		1.16	5.4	28	2602.116
4	AGS U-frame LW					
a	with rosettes		1.16 x 0.73	15.4	12	2602.088
			1.16 x 1.09	17.1	20	2602.089
b	with AGS safety levers		1.16 x 0.73	13.8	20	2602.090
			1.16 x 1.09	15.5	20	2602.091
5	AGS interior standard LW advanced guardrail assembly not possible, only for use at inner scaffolding side		2.00	8.0	28	2602.075
6	AGS corner standard LW Use in advanced structure for inner and outer standards		2.00	8.3	28	2602.095
7	AGS guardrail adapter with half-coupler for further construction with guardrails in inner or outer corners			1.0	500	2602.021
8	AGS guardrail					
	lightweight guardrail made of 33.7 mm tube, assembly without tools ensures rapid installation and removal		0.73	1.4	140	2602.005
			1.09	2.0	140	2602.006
			1.40	2.6	140	2602.007
			1.57	2.9	140	2602.061
			2.07	3.8	140	2602.062
			2.57	4.7	140	2602.063
			3.07	5.6	140	2602.064
	Metric, lightweight guardrail made of 33.7 mm tube, assembly without tools ensures rapid installation and removal		1.50	2.8	140	2602.084
			2.00	3.7	140	2602.085
			2.50	4.6	140	2602.086
			3.00	5.5	140	2602.087
9	AGS guardrail Fixx assembly only from secured level. Lightweight guardrail from d=33.7 mm tube, tool-free assembly guarantees a quick handling, subsequent dismantling not possible		1.57	3.1	140	2602.067
			2.07	4.0	140	2602.068
			2.57	4.9	140	2602.069
			3.07	5.8	140	2602.070
10	AGS guardrail Mixx assembly only from secured level. Lightweight guardrail from d=33.7 mm tube, tool-free assembly guarantees a quick handling, subsequent dismantling possible with special tool		1.57	3.2	140	2602.080
			2.07	4.1	140	2602.081
			2.57	5.0	140	2602.082
			3.07	5.9	140	2602.083
11	AGS double end guardrail		0.73	4.2	60	2602.014
	closure of the scaffolding at its end		1.09	5.5	50	2602.018



Allround Scaffolding

With the AGS guardrail standard **1** and the AGS standard LW for roof edge protection **2** advanced roof edge protection barriers can be assembled – braced with a diagonal brace 0.73 x 1.50 m.

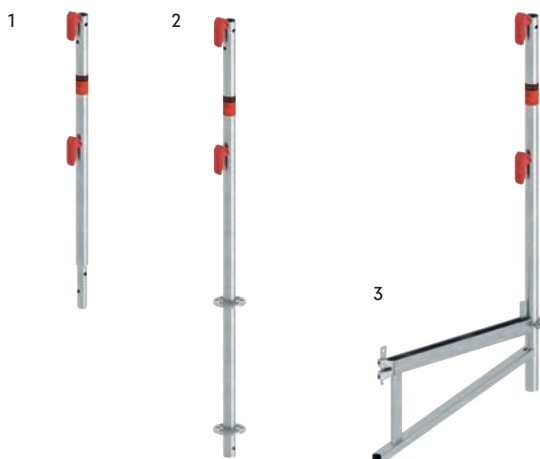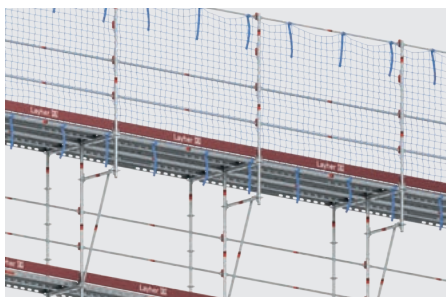


Learn more on
YouTube
AGS roof edge
protection

With the AGS guardrail standard **1** and the AGS roof edge protection console **3** advanced roof edge protection barriers can be assembled – braced with a SpeedyScaf brace with 2 half-couplers.

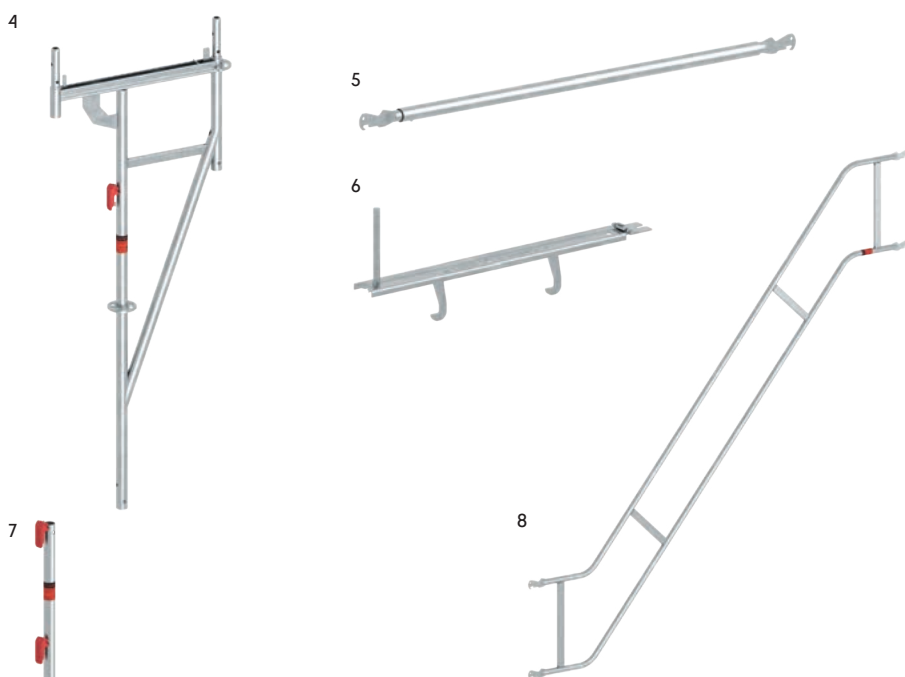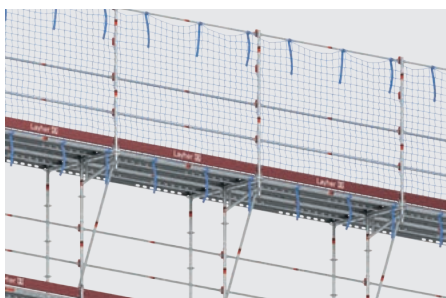


The AGS eaves bracket **4** fulfils workplace requirements for painters / plasterers, tinsmiths and roofers. It replaces material and timeconsuming constructions.



AGS guardrail adjustable is to be used as the guardrail in the top layer in the 3.07 m bay and AGS guardrail 2602.062 in the 2.57 m bay.



The telescopic AGS guardrail **5** makes it possible to close fitting panels and the inner corner area with system guardrails.



For a closed and even surface between the platform stairway and the main bay, the U-cover ledger 80 LW (see page 31) can be used.

Pos.	Description	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	AGS guardrail standard LW for the safe advanced assembly of an AGS roof edge protection	1.00	4.2	50	2602.027 
2	AGS standard LW for roof edge protection for the safe advanced assembly of an AGS roof edge protection	1.71	7.0	28	2602.028 
3	AGS roof edge protection console for the safe advanced assembly of an AGS roof edge protection	0.73	11.2	20	2602.026 
4	AGS eaves bracket	2.00 x 0.73	18.7	50	2602.066 
5	Telescopic AGS guardrail lightweight, telescopic guardrail for equalising bays and inner corners	 1.09 – 1.57	4.4	50	2602.024 
		 1.57 – 2.57	6.5	50	2602.025 
6	U-lift-off-preventer with toe board pin for use of SpeedyScaf toe boards instead of standard Allround toe boards	 0.73	1.4	260	2627.008 
		 1.09	1.9	100	2627.009 
7	AGS stair guardrail post for platform stair	 1.20	4.6	50	2602.076 
8	AGS stair guardrail	— 2.57 x 1.50	15.0	30	2602.077 
		— 2.57 x 2.00	15.8	30	2602.078 
		— 3.07 x 2.00	17.6	30	2602.079 
9	Internal guardrail fixing device rapid tool-free assembly by swinging in the bar		0.3	500	2602.012 
10	U-ledger bracket with 1 wedge head for widening the working space between scaffolding and wall	 0.14	1.0	500	2618.014 
11	Guardrail adapter for lateral guardrail connection of AGS and Allround system		0.7	500	2602.016 

Horizontal support elements

Depending on the scaffolding bay length, deck type and load, ledgers made of steel or aluminium are available in cylindrical tube, U-section and reinforcement sections for higher loads. The ledgers are deck beams, bracing elements and guardrails.

The wedge lock connection ensures positive and non-positive connection with central load introduction between standards and ledgers. Safety is already assured in the assembly state because the wedge lock already prevents unintentional disengagement when the wedge is loosely inserted. Longitudinal ledgers can be omitted at deck level if the decks are secured against lifting off by a lift-off preventer.



Slide the wedge head over the rosette.



Thanks to the AutoLock-function, the wedge automatically falls into the rosette. The component is secured against shifting and falling out.




Hammer down the wedge to provide a non-positive connection (Use 500 g metal hammer until the blow bounces off).

Load capacity of O-ledger, steel*

Ledger length (system dimension) [m]	0.73	1.09	1.40	1.57	2.07	2.57	3.07
Evenly distributed line load (q) [kN / m]	29.2	14.1	8.8	7.0	4.1	2.7	1.9
Individual load (P) in centre of bay [kN]	10.1	7.1	5.7	5.1	4.0	3.3	2.7

* Working load

The wedge head design with AutoLock function of the **O-ledger LW 1** means greater construction safety. By turning the ledger the function gets activated and the wedge descends into rosette slot automatically. Thanks to the reduction of the wall thickness comparing to former generations of ledgers there is a weight saving of 12%. That leads to less strenuous working conditions. Additionally the bending strength got increased about 24%.

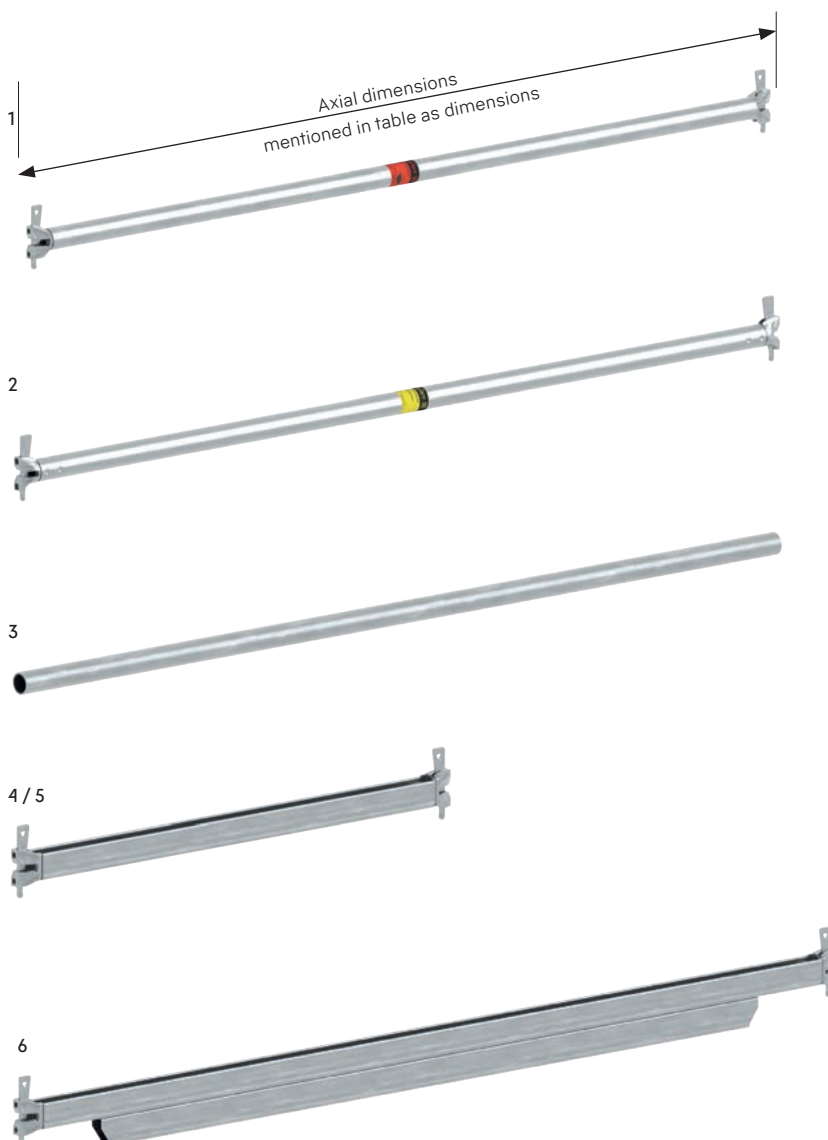

Pos.	Description	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	O-ledger LW steel, with AutoLock function				
		0.39	1.9	250	2601.039 
		0.45	2.1	250	2601.045 
		0.73	2.9	400	2601.073
		0.86	3.3	50	2601.086 
		0.90	3.4	50	2601.090 
		1.04	3.8	50	2601.103 
		1.09	4.0	50	2601.109
		1.29	4.6	50	2601.129 
		1.40	5.0	50	2601.140 
		1.57	5.5	50	2601.157
		2.07	7.0	50	2601.207
		2.57	8.5	50	2601.257
		3.07	10.1	50	2601.307
		4.14	13.4	50	2601.414 
	steel, metric, with AutoLock function	0.25	1.4	300	2601.025 
		0.50	2.2	250	2601.050 
		1.00	3.7	50	2601.100 
		1.50	5.3	50	2601.150 
		2.00	6.8	50	2601.200 
		2.50	8.3	50	2601.250 
		3.00	9.9	50	2601.300 
2	O-ledger aluminium	0.73	2.8	400	3201.073 
		1.09	2.8	50	3201.109 
		1.40	3.7	50	3201.140 
		1.57	4.0	50	3201.157 
		2.07	4.5	50	3201.207 
		2.57	4.9	50	3201.257 
		3.07	5.5	50	3201.307 
3	Scaffolding tube steel, hot-dip galvanised Scaffolding tubes d=48,3 x 4.0 mm, as per DIN EN 39	0.50	2.3	250	4600.050 
		1.00	4.5	61	4600.100
		1.50	6.8	61	4600.150 
		2.00	9.0	61	4600.200
		2.50	11.3	61	4600.250 
		3.00	13.5	61	4600.300
		3.50	15.8	61	4600.350 
		4.00	18.1	61	4600.400
		5.00	22.7	61	4600.500
		6.00	27.3	61	4600.600
4	U-ledger LW T14 steel	0.45	2.1	250	2618.045
		0.50	2.5	250	2618.050 
		0.73	3.1	400	2618.073
		1.00	4.1	50	2618.100 
		1.04	4.2	50	2618.103 
		1.09	4.3	50	2618.109
		1.29	5.2	50	2618.129 
		1.40	5.4	50	2618.139 
5	U-ledger aluminium	0.73	1.5	400	3203.073 
6	U-ledger reinforced LW T14 steel	1.40	8.9	50	2618.140 
		1.57	9.4	50	2618.157
		2.07	12.7	50	2618.207
		2.57	15.7	50	2618.257
		3.07	19.0	50	2618.307
	steel, metric	2.00	12.5	50	2618.200 
		2.50	15.5	50	2618.250 
		3.00	18.5	50	2618.300 

U-ledger deck configuration

Bay width Deck width	0.19 m			0.32 m			0.50 m			0.61 m		
Version	A	B	C	A	B	C	A	B	C	A	B	C
0.45 m	-	-	-	1	-	-	-	-	-	-	-	-
0.50 m	2	-	-	-	-	-	-	-	-	-	-	-
0.73 m	-	-	-	2	-	-	-	-	-	1	-	-
1.00 m	3	-	2	1	-	-	-	1	-	-	-	-
1.04 m	-	-	-	1	-	-	-	-	-	1	-	-
1.09 m	-	-	-	3	1	-	-	2	-	1	-	-
1.29 m	1	1	1	1	3	-	-	2	1	-	-	-
1.40 m	-	5	-	4	1	1	-	2	-	-	-	-
1.50 m	3	2	-	1	-	-	1	2	-	-	-	-
1.57 m	1	-	-	4	-	-	-	3	-	-	-	-
2.00 m	-	3	-	4	4	-	-	-	1	-	-	-
2.07 m	-	7	-	6	-	-	-	4	-	1	-	-
2.50 m	1	4	-	5	5	-	-	-	1	-	-	-
2.57 m	1	-	-	7	-	-	-	5	-	-	-	-
3.00 m	2	-	2	6	9	-	-	5	1	-	-	-
3.07 m	7	1	-	5	1	-	-	6	-	4	-	-

Example: A 1.09 m wide bay can be covered with 3x 0.32 m decks (Version A) or 1x 0.61 m + 1x 0.32 m decks (Version B).

Loading capacity U-ledger LW T14, steel*

Ledger type and length [m]	U-LW 0.73	U-LW 1.09	U-LW 1.40
Evenly distributed line load q [kN/m]	19.0	17.5	10.8
Individual load P in bay centre [kN]	6.1	8.6	6.4


Loading capacity U-ledger reinforced LW T14*

Ledger type and length [m]	1.40	1.57	2.07	2.57	3.07
Evenly distributed line load q [kN/m]	19.8	17.7	13.0	8.4	5.0
Individual load P in bay centre [kN]	19.2	17.1	12.9	10.4	8.7


Loading capacity O-ledger reinforced LW*

Ledger type and length [m]	1.09	1.40	1.57	2.07	2.57	3.07
Evenly distributed line load q [kN/m]	21.4	17.1	16.1	11.1	8.5	6.0
Individual load P in bay centre [kN]	19.6	19.4	17.3	13.2	10.7	9.0

* permissible working load

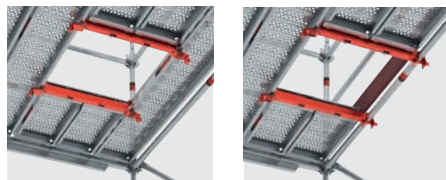


Openings, accesses and even conversions are easily constructed with U- and O-ledgers 10-13 with lateral receiving elements.

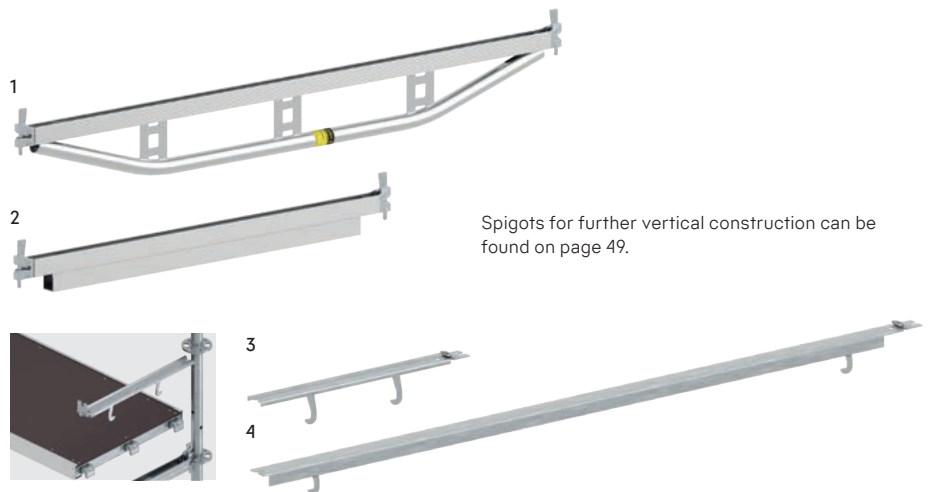





Spigots for further vertical construction can be found on page 49.

The U-Lift-off preventer is for U-ledgers, U-bridging ledgers, U-ledgers reinforced and U-lattice beams. It serves to prevent scaffolding decks from being lifted off.

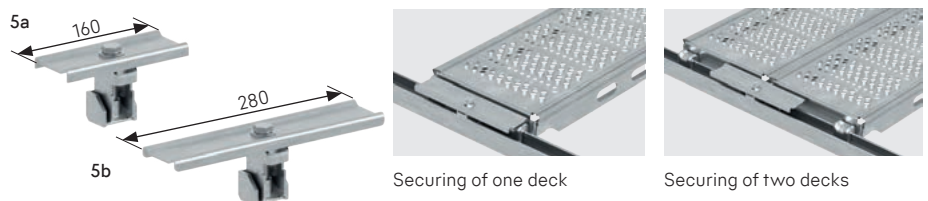


Securing of one deck

Securing of two decks

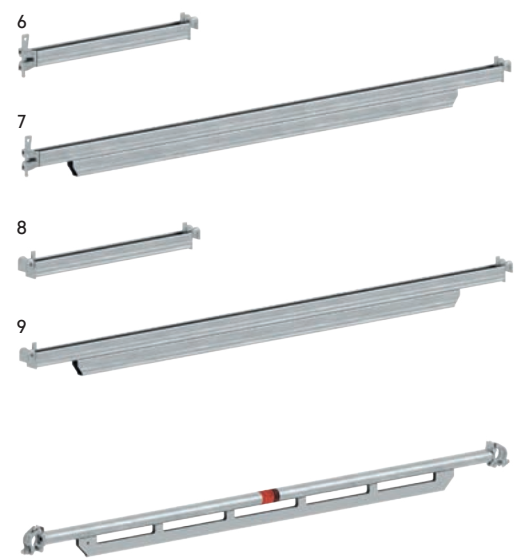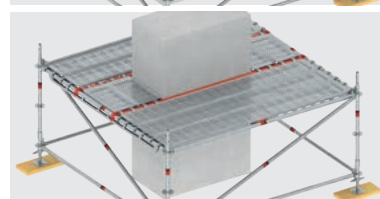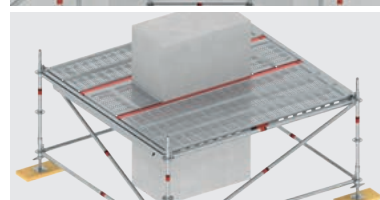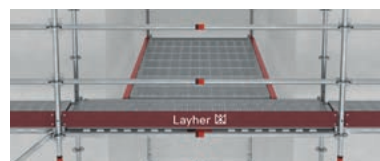


The use of the interchangeable ledger in O-variant can be made by use of the Speedy Vario anchoring ledger LW (Ref. No. 1754.xxx). Learn more in the catalogue SpeedyScaf.

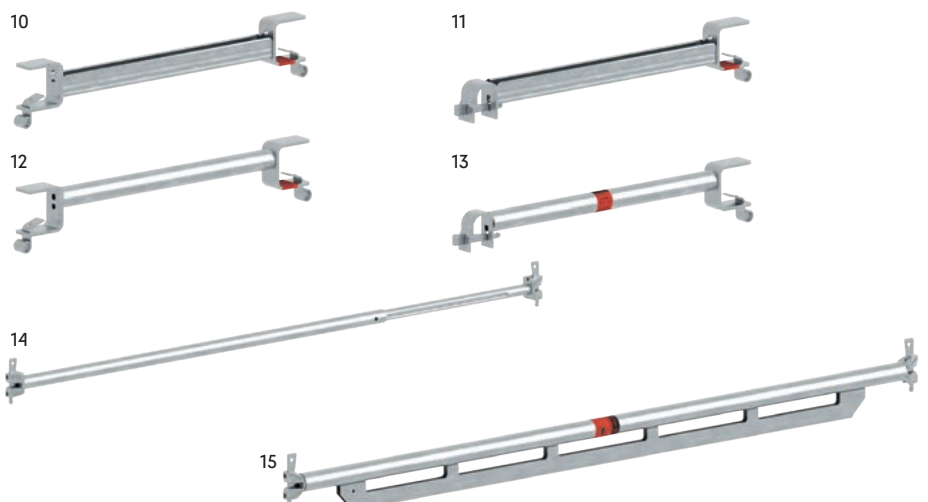

Pos.	Description	WS [mm]	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	U-bridging ledger aluminium		1.57	4.3	50	3207.157 
			2.07	5.5	50	3207.207 
2	U-ledger reinforced aluminium		1.09	2.9	50	3203.109 
			1.40	3.7	50	3203.140 
3	U-Lift-off preventer T8		0.39	0.6	250	2635.039 
			0.45	0.7	250	2635.045 
			0.50	0.8	250	2635.050 
			0.73	1.3	250	2635.073 
			1.00	1.7	50	2635.100 
			1.09	1.8	50	2635.109 
			1.29	2.1	50	2635.129 
4	U-Lock against lift-off T9		1.40	5.3	50	2658.140
			1.57	5.9	50	2658.157
			2.07	7.9	50	2658.207
			2.57	9.9	50	2658.257
			3.07	11.9	50	2658.307
5	Universal U-Lift-off preventer	19	0.16	0.7	250	2635.002 
		22	0.16	0.7	250	2635.003 
		19	0.28	1.0	250	2635.000 
		22	0.28	1.0	250	2635.001 
6	U-interchangeable ledger LW with 1 claw steel, galvanised		0.73	3.2	400	2600.074 
			1.09	4.4	50	2600.110 
7	U-interchangeable ledger LW reinforced with 1 claw steel, galvanised			9.4	50	2600.158 
				12.6	50	2600.208 
				15.6	50	2600.258 
				18.5	50	2600.308 
8	U-interchangeable ledger LW with 2 claws steel, galvanised		0.73	2.9	100	2600.073 
			1.09	4.2	20	2600.109 
9	U-interchangeable ledger LW reinforced with 2 claws steel, galvanised		1.40	8.7	50	2600.140 
			1.57	9.5	20	2600.157 
			2.07	12.5	20	2600.207 
			2.57	15.5	20	2600.257 
			3.07	18.5	20	2600.307 
10	U-ledger steel deck – steel deck for connection on both sides to the steel deck flank, with securing flaps, loadable up to load class 3, up to steel decks of 3.07 m		0.32	3.1	100	2614.030 
			0.64	4.3	50	2614.073 
			0.96	5.5	50	2614.108 
11	U-ledger steel deck – O-ledger one side for connection to the steel flank, with securing flap, the other side for connection to an O-ledger, with securing wedge		0.32	3.3	100	2614.001 
			0.64	4.4	50	2614.002 
			0.96	6.5	50	2614.004 
12	O-ledger steel deck – steel deck for connection on both sides to the steel deck flank, with securing flaps, loadable up to load class 3, up to steel decks of 3.07 m		0.32	3.1	100	2614.069 
			0.64	4.2	50	2614.070 
			0.96	5.2	50	2614.071 
13	O-ledger steel deck – O-ledger one side for connection to the steel flank, with securing flap, the other side for connection to an O-ledger, with securing wedge		0.32	2.4	100	2614.032 
			0.64	4.4	50	2614.064 
			0.96	5.5	50	2614.096 
14	Guardrail, adjustable for use in compensation bays		1.09 – 1.57	5.7	50	2606.001 
			1.57 – 2.57	8.5	50	2606.000 
15	O-bridging ledger LW steel		1.09	5.9	50	2672.109 
			1.40	7.7	50	2672.140 
			1.57	8.7	50	2672.157 
			2.07	11.4	50	2672.207 
			2.57	14.3	50	2672.257 
			3.07	17.0	50	2672.307 


Diagonal bracing

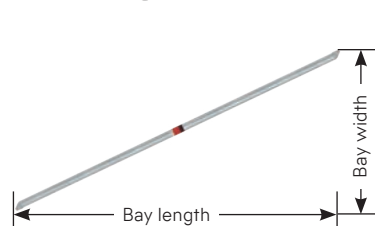


The O-ledger LW, horizontal-diagonal, with wedge heads serves to brace horizontal levels in scaffolding without standard decks or in scaffolding with board decking.

The diagonal braces LW with wedge locks further brace the basic system consisting of standards and ledgers, and thanks to their high connection values also facilitate special structures.


O-ledger LW, horizontal-diagonal

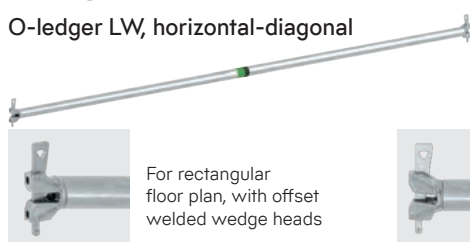

Distinction between right and left horizontal diagonal brace



From top view, the wedge head of a left horizontal diagonal brace points to the left side.




From top view, the wedge head of a right horizontal diagonal brace points to the right side.



The bay length is displayed in numbers and by a defined colour code. Number of rosettes tell you which standard is used. The colour codes are valid for bay heights of 0.50 m, 1.00 m, 1.50 m and 2.00 m. Labels can be reordered.

0.73 m
1.09 m
1.40 m
1.57 m
2.07 m
2.57 m
3.07 m

Diagonal LW

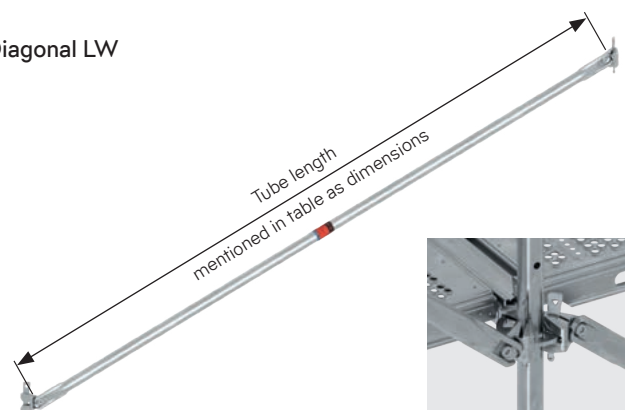


Pos.	Description	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	O-ledger LW, horizontal-diagonal. steel				
	for 1.09 m bay length, 1.09 m bay width	1.54	5.5	50	2678.109
	for 1.29 m bay length, 1.29 m bay width	1.82	6.5	50	2678.129
	for 1.57 m bay length, 1.09 m bay width, right	1.91	6.7	50	2678.158
	for 1.57 m bay length, 1.57 m bay width	2.20	7.7	50	2678.157
	for 2.00 m bay length, 1.00 m bay width, left	2.23	7.8	50	2678.201
	for 2.00 m bay length, 2.00 m bay width	2.83	9.6	50	2678.200
	for 2.07 m bay length, 0.73 m bay width, left	2.19	7.8	50	2678.208
	for 2.07 m bay length, 1.04 m bay width, left	2.32	8.1	50	2678.206
	for 2.07 m bay length, 1.09 m bay width, right	2.34	8.1	50	2678.209
	for 2.07 m bay length, 1.57 m bay width, left	2.60	9.2	50	2678.205
	for 2.07 m bay length, 2.07 m bay width	2.93	10.0	50	2678.207
	for 2.57 m bay length, 0.73 m bay width, left	2.67	9.3	50	2678.258
	for 2.57 m bay length, 1.09 m bay width, right	2.79	9.6	50	2678.259
	for 2.57 m bay length, 1.57 m bay width, right	3.01	10.3	50	2678.256
	for 2.57 m bay length, 2.07 m bay width	3.30	11.2	50	2678.255
	for 2.57 m bay length, 2.57 m bay width	3.64	12.2	50	2678.257
	for 3.07 m bay length, 0.73 m bay width, left	3.16	10.9	50	2678.308
	for 3.07 m bay length, 1.09 m bay width, right	3.26	11.1	50	2678.309
	for 3.07 m bay length, 1.57 m bay width, left	3.45	11.7	50	2678.310
	for 3.07 m bay length, 3.07 m bay width	4.34	14.5	50	2678.307

Pos.	Description	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Diagonal brace LW, steel, 2.00 m bay height				
	0.73 m bay length	2.12	7.1	50	2683.073
	1.04 m bay length	2.23	7.6	50	2683.104 
	1.09 m bay length	2.25	7.6	50	2683.109
	1.29 m bay length	2.35	7.8	50	2683.129 
	1.40 m bay length	2.40	7.9	50	2683.140 
	1.57 m bay length	2.49	8.2	50	2683.157
	2.07 m bay length	2.81	9.2	50	2683.207
	2.57 m bay length	3.18	10.0	50	2683.257
	3.07 m bay length	3.58	11.1	50	2683.307
	4.14 m bay length	4.51	13.7	50	2683.414 
	1.00 m bay length	2.22	7.3	50	2683.100 
	2.00 m bay length	2.76	9.1	50	2683.200 
	2.50 m bay length	3.12	9.9	50	2683.250 
	3.00 m bay length	3.52	11.0	50	2683.300 
2	Diagonal brace LW, steel, 1.50 m bay height				
	0.73 m bay length	1.65	5.8	50	2682.073 
	1.04 m bay length	1.79	6.2	50	2682.104 
	1.09 m bay length	1.81	6.3	50	2682.109 
	1.29 m bay length	1.92	6.7	50	2682.129 
	1.40 m bay length	1.99	6.8	50	2682.140 
	1.57 m bay length	2.11	7.3	50	2682.157 
	2.07 m bay length	2.48	8.2	50	2682.207 
	2.57 m bay length	2.89	9.5	50	2682.257 
	3.07 m bay length	3.32	10.5	50	2682.307 
	1.00 m bay length	1.77	6.2	50	2682.100 
	2.00 m bay length	2.42	8.0	50	2682.200 
	2.50 m bay length	2.83	9.0	50	2682.250 
	3.00 m bay length	3.26	10.3	50	2682.300 
3	Diagonal brace LW, steel, 1.00 m bay height				
	0.73 m bay length	1.20	4.8	50	2681.073 
	1.04 m bay length	1.39	5.1	50	2681.104 
	1.09 m bay length	1.41	5.2	50	2681.109 
	1.29 m bay length	1.55	5.6	50	2681.129 
	1.40 m bay length	1.64	5.8	50	2681.140 
	1.57 m bay length	1.79	6.2	50	2681.157 
	2.07 m bay length	2.20	7.4	50	2681.207 
	2.57 m bay length	2.66	8.6	50	2681.257 
	3.07 m bay length	3.13	9.9	50	2681.307 
	1.00 m bay length	1.36	5.0	50	2681.100 
	2.00 m bay length	2.14	7.2	50	2681.200 
	2.50 m bay length	2.59	8.5	50	2681.250 
	3.00 m bay length	3.06	9.7	50	2681.300 
4	Diagonal brace LW, steel, 0.50 m bay height				
	0.73 m bay length	0.75	3.6	50	2680.073 
	1.04 m bay length	1.08	4.2	50	2680.104 
	1.09 m bay length	1.10	4.4	50	2680.109 
	1.29 m bay length	1.29	4.9	50	2680.129 
	1.40 m bay length	1.38	5.1	50	2680.140 
	1.57 m bay length	1.55	5.6	50	2680.157 
	2.07 m bay length	2.03	6.9	50	2680.207 
	2.57 m bay length	2.51	8.2	50	2680.257 
	3.07 m bay length	3.00	9.6	50	2680.307 
	1.00 m bay length	1.03	4.3	50	2680.100 
	2.00 m bay length	1.96	6.7	50	2680.200 
	2.50 m bay length	2.44	8.1	50	2680.250 
	3.00 m bay length	2.93	9.4	50	2680.300 
5	Diagonal brace, aluminium, 2.00 m bay height				
	0.73 m bay length	2.12	3.9	50	3204.073 
	1.09 m bay length	2.25	4.1	50	3204.109 
	1.40 m bay length	2.40	4.2	50	3204.140 
	1.57 m bay length	2.49	4.3	50	3204.157 
	2.07 m bay length	2.81	4.7	50	3204.207 
	2.57 m bay length	3.18	4.9	50	3204.257 
	3.07 m bay length	3.58	5.3	50	3204.307 

WS = wrench size LC = load class PU = packaging unit  = Layher Individual possible  = new in the catalogue  = available ex works
 = delivery time on request  = only available in this packaging unit  = the approval process is not yet completed

U-Scaffolding decks

Our scaffolding decks comply with the requirements of DIN EN 12811.

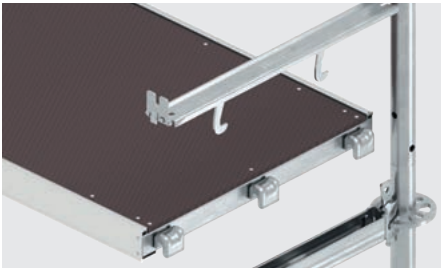

Depending on the type of application and scaffolding group but also in accordance with your working requirements and priorities, choose from decks made of, aluminium, steel or an aluminium frame with plywood or plastic board. The load-bearing capacity of the overall system must be observed. The claws of the Layher scaffolding decks slide easily during assembly into the U-sections of the transverse ledgers, ensuring unbeatable speed of assembly.

The **U-steel deck LW 1** fulfils high load-bearing capacities with a considerably lower weight, thanks to the use of high-tensile steel and intelligent combination of perforation and profiling.



CO₂-reduced steel deck variant LW

Less CO₂ means more sustainability. The steel deck LW is also available in a CO₂-reduced version. When you purchase the CO₂-reduced version, you will receive a confirmation and a declaration of the CO₂ footprint for each item – with a TÜV stamp. Please contact us. **Further information can be found in the Layher Info 'CO₂-reduced steel deck LW'.**


The **U-Xtra-N deck 3** is identical in construction with the robust deck, but is equipped with a glass- fibrereinforced plastic plate. It is very weather-resistant. The surface has a proven anti-slip structure, which is very easy to clean. Plaster and dirt can be easily removed by using a high-pressure cleaner or a scraper..

The **U-stalu deck 5–8**, is an extremely light-weight and durable aluminium deck with a sturdy, riveted steel cap.



Individual stamping

The Layher steel decks can be provided with individual lettering. Conspicuously visible on the side section.

Further information, you can find in the Layher Info "Personalised Products".

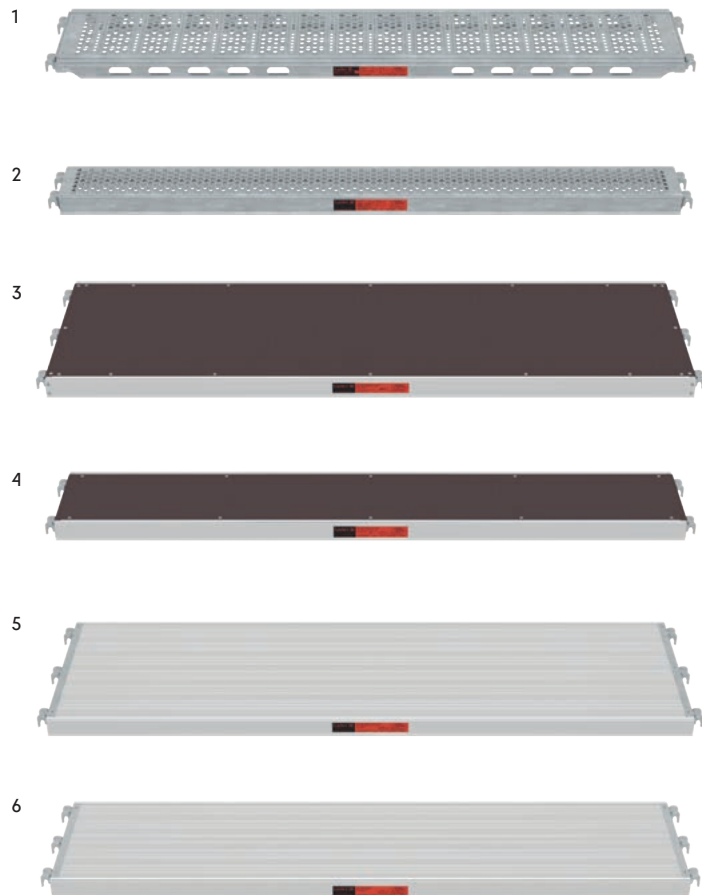

U-stalu deck 50 in surface scaffolding

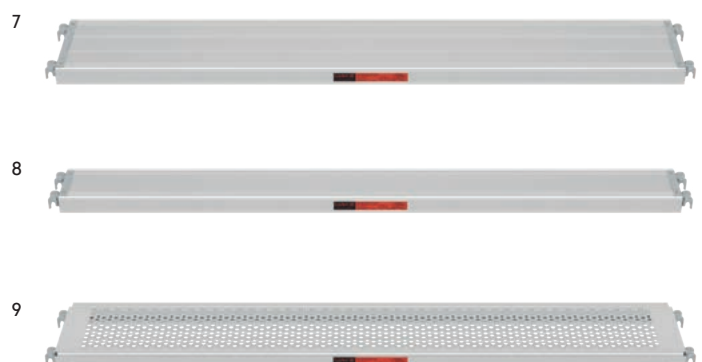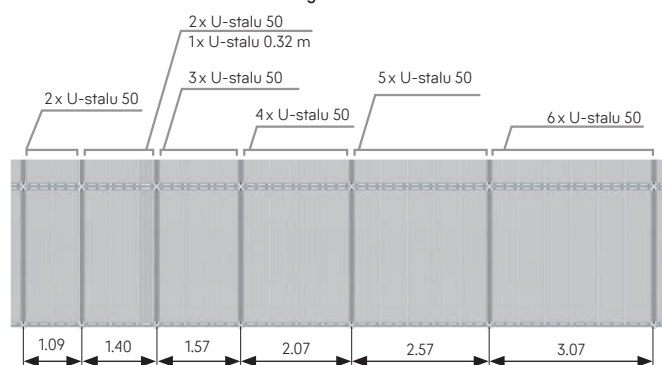


Pos.	Description		LC	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	U-steel deck LW, 0.32 m wide steel, hot-dip galvanised, perforated, non-slip working surface	IND	6	0.73 × 0.32	5.6	60	3883.073
		IND	6	1.00 × 0.32	7.2	60	3883.100
		IND	6	1.04 × 0.32	7.4	60	3883.104
		IND	6	1.09 × 0.32	7.7	60	3883.109
		IND	6	1.29 × 0.32	8.6	60	3883.129
		IND	6	1.40 × 0.32	9.3	60	3883.140
		IND	6	1.50 × 0.32	10.1	60	3883.150
		IND	6	1.57 × 0.32	10.5	60	3883.157
		IND	6	2.00 × 0.32	12.9	60	3883.200
		IND	6	2.07 × 0.32	13.4	60	3883.207
		IND	5	2.50 × 0.32	15.9	60	3883.250
		IND	5	2.57 × 0.32	16.4	60	3883.257
		IND	4	3.00 × 0.32	18.8	60	3883.300
		IND	4	3.07 × 0.32	19.3	60	3883.307
		IND	3	4.14 × 0.32	25.6	60	3883.414
2	U-steel deck, 0.19 m wide constructed as 3812, as equalising deck, e.g. for birdcage scaffolding	IND	6	0.73 × 0.19	4.1	50	3801.073
		IND	6	1.09 × 0.19	5.7	50	3801.109
		IND	6	1.29 × 0.19	6.6	50	3801.129
		IND	6	1.40 × 0.19	7.1	50	3801.140
		IND	6	1.57 × 0.19	7.8	50	3801.157
		IND	6	2.07 × 0.19	10.0	50	3801.207
		IND	5	2.57 × 0.19	12.3	50	3801.257
		IND	4	3.07 × 0.19	14.5	50	3801.307
3	U-Xtra-N deck, 0.61 m wide aluminium stile section, glass-fibre-reinforced plastic plate, extremely durable, lightweight, non-slip working surface, easily stackable	IND	3	0.73 × 0.61	7.0	60	3866.073
		IND	3	1.09 × 0.61	9.5	60	3866.109
		IND	3	1.57 × 0.61	13.0	40	3866.157
		IND	3	2.07 × 0.61	16.2	40	3866.207
		IND	3	2.57 × 0.61	19.0	40	3866.257
		IND	3	3.07 × 0.61	22.5	40	3866.307
4	U-Xtra-N deck, 0.32 m wide constructed as Ref. No. 3866, as console or equalising deck, e.g. for birdcage scaffolding	IND	6	1.57 × 0.32	8.5	30	3877.157
		IND	5	2.07 × 0.32	10.7	30	3877.207
		IND	4	2.57 × 0.32	13.0	30	3877.257
		IND	3	3.07 × 0.32	15.2	30	3877.307
5	U-stalu deck T21, 0.61 m wide lightweight aluminium deck with sturdy, riveted steel caps	IND	6	0.73 × 0.61	6.7	34	3898.073
		IND	6	1.09 × 0.61	9.0	34	3898.109
		IND	6	1.40 × 0.61	11.0	34	3898.140
		IND	6	1.57 × 0.61	12.1	34	3898.157
		IND	6	2.07 × 0.61	15.3	34	3898.207
		IND	5	2.57 × 0.61	18.5	34	3898.257
		IND	4	3.07 × 0.61	21.7	34	3898.307
6	U-stalu deck 50 for quick and economical decking of surface 1.09 m wide facade scaffolding with 2 decks or in surface scaffolding	IND	6	0.73 × 0.50	6.0	34	3855.073
		IND	6	1.09 × 0.50	8.0	34	3855.109
		IND	6	1.40 × 0.50	9.7	40	3855.140
		IND	6	1.57 × 0.50	10.3	34	3855.157
		IND	6	2.07 × 0.50	13.1	34	3855.207
		IND	5	2.57 × 0.50	15.9	34	3855.257
		IND	4	3.07 × 0.50	18.6	34	3855.307
7	U-stalu deck T9, 0.32 m wide as equalizing deck, e.g. for birdcage scaffolding	IND	6	1.57 × 0.32	7.4	30	3856.157
		IND	6	2.07 × 0.32	9.2	30	3856.207
		IND	5	2.57 × 0.32	11.0	30	3856.257
		IND	4	3.07 × 0.32	13.3	30	3856.307
8	U-stalu deck T9, 0.19 m wide as equalizing deck, e.g. for birdcage scaffolding	IND	6	1.57 × 0.19	5.6	50	3857.157
		IND	6	2.07 × 0.19	7.2	50	3857.207
		IND	5	2.57 × 0.19	8.7	50	3857.257
		IND	4	3.07 × 0.19	10.2	50	3857.307
9	U-alu deck, perforated, 0.32 m wide deck and caps of aluminium with robust steel claws, perforated, non-slip working surface		6	0.73 × 0.32	3.1	60	3803.073
			6	1.09 × 0.32	4.4	60	3803.109
			6	1.57 × 0.32	6.5	60	3803.157
			5	2.07 × 0.32	8.0	60	3803.207
			4	2.57 × 0.32	10.0	60	3803.257
			3	3.07 × 0.32	11.5	60	3803.307

Allround Scaffolding

Internal accesses can be built into the scaffolding with the access decks. These decks conform to the requirements of DIN EN 12811 and are available with a separate or an integrated access ladder for internal access.



In the case of circular scaffolding, the corners are covered with the **corner deck, adjustable**, with toe board **9**. System-conforming covers are thus no longer a problem. You obtain a continuous walk surface with integrated toe board.



Installation situation 45° **9**



Installation situation 90° **9**




Installation situation 90° **11**

The **access ladder, T19 14** is a flexible aid to climbing inside the scaffolding to a storey height of 2 m.




Installation situation U-robust access deck with hatch offset **16**

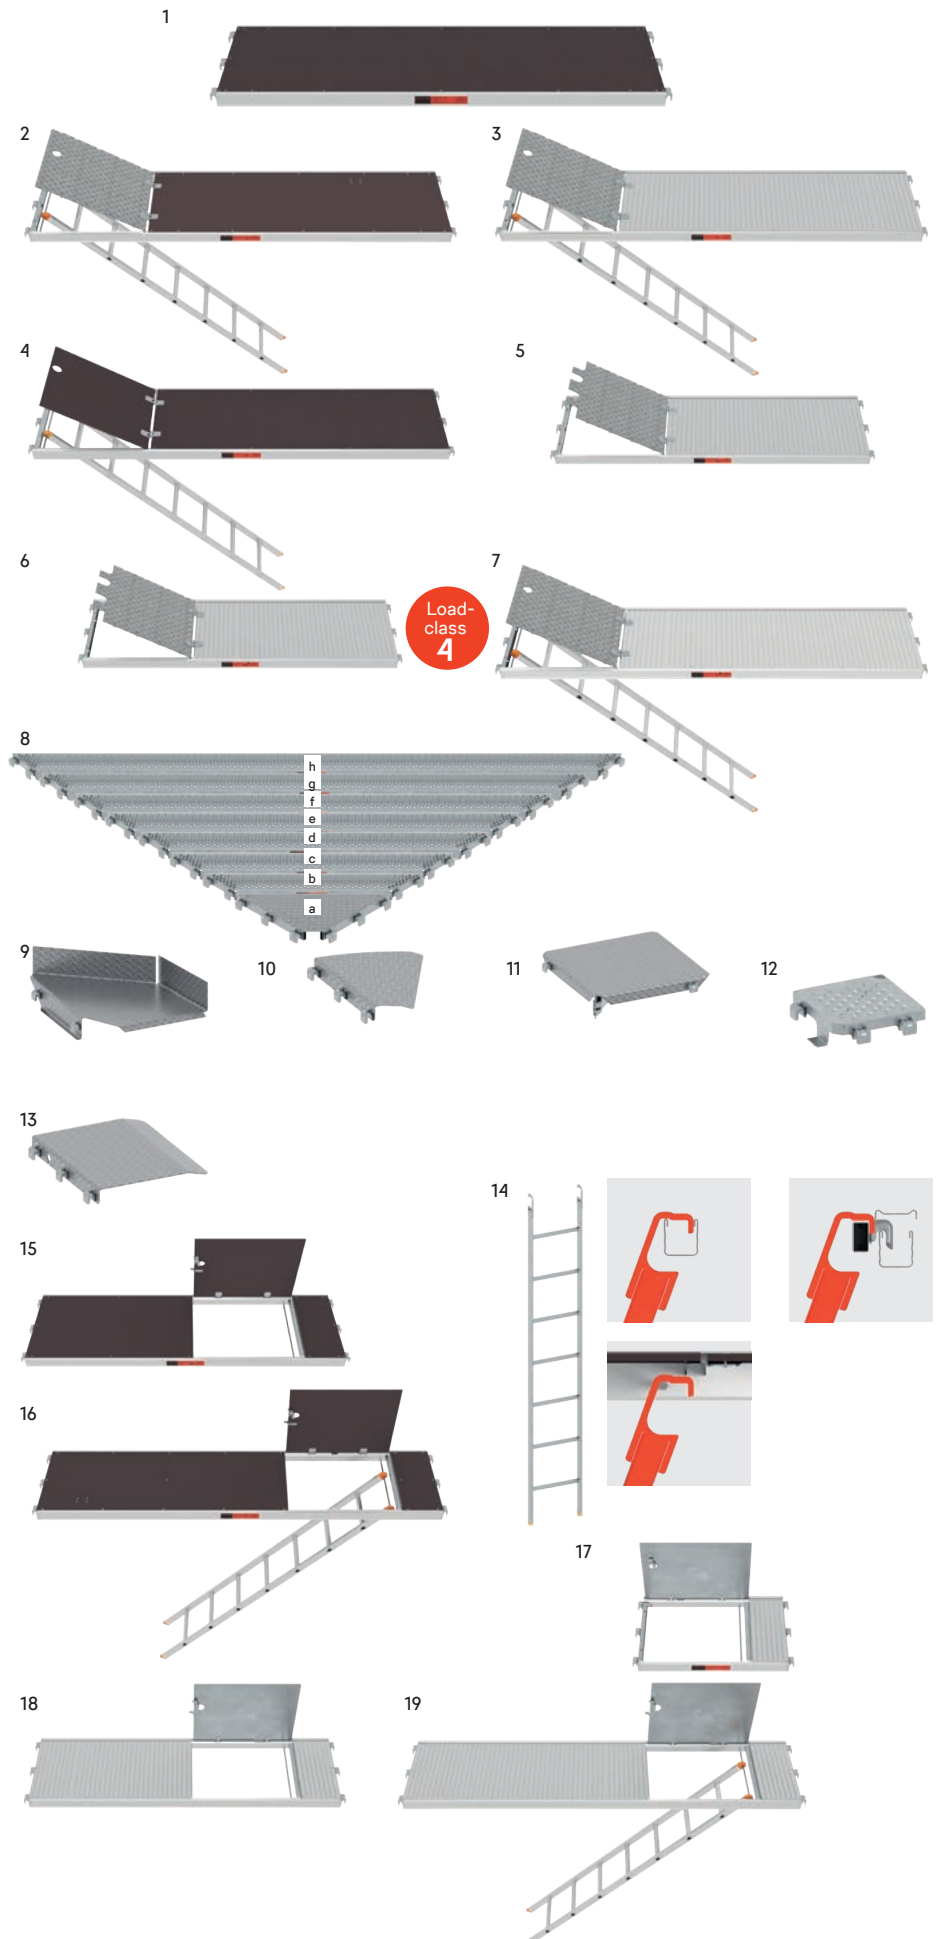

Pos.	Description		LC	Dimensions L/H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	U-robust deck, 0.61 m wide aluminium stile section, plywood panel BFU 100G, phenolic resin coating and rot protection, lightweight, non-slip, easily stackable	IND	3	1.57 × 0.61	13.1	40	3835.157
		IND	3	2.07 × 0.61	16.4	40	3835.207
		IND	3	2.57 × 0.61	19.3	40	3835.257
		IND	3	3.07 × 0.61	22.6	40	3835.307
2	U-Xtra-N access deck 0.61 m wide, with integrated access ladder deck surface of glass-fibre-reinforced plastic, aluminium access hatch	IND	3	2.57 × 0.61	25.4	40	3869.257
		IND	3	3.07 × 0.61	29.5	40	3869.307
3	U-aluminium access deck, 0.61 m wide, with integrated access ladder lightweight access deck with aluminium deck surface and aluminium access hatch	IND	3	2.57 × 0.61	24.0	40	3852.257
		IND	3	3.07 × 0.61	28.0	40	3852.307
4	U-robust access deck, 0.61 m wide, with integrated access ladder	IND	3	2.57 × 0.61	24.0	40	3838.257
		IND	3	3.07 × 0.61	27.4	40	3838.307
5	U-aluminium access deck, 0.61 m wide lightweight access deck with aluminium deck surface and aluminium access hatch	IND	3	1.57 × 0.61	15.1	40	3851.157 
		IND	3	2.07 × 0.61	17.0	40	3851.207
		IND	3	2.57 × 0.61	20.0	40	3851.257
		IND	3	3.07 × 0.61	24.5	40	3851.307
6	U-aluminium access deck LC 4, 0.61 m wide lightweight access deck with aluminium deck surface and aluminium access hatch	IND	4	1.57 × 0.61	15.6	40	3886.157 
		IND	4	2.07 × 0.61	17.6	40	3886.207 
		IND	4	2.57 × 0.61	20.8	40	3886.257 
7	U-aluminium access deck LC 4, 0.61 m wide, with integrated access ladder lightweight access deck with aluminium deck surface and aluminium access hatch	IND	4	2.57 × 0.61	24.3	40	3885.257 
8	U-steel deck 45°						
	type a		3	0.80 × 0.35	8.6	60	3868.101 
	type b		3	1.17 × 0.19	6.4	50	3868.102 
	type c		3	1.56 × 0.19	7.9	50	3868.103 
	type d		3	1.94 × 0.19	9.7	50	3868.104 
	type e		3	2.33 × 0.19	11.5	50	3868.105 
	type f		3	2.71 × 0.19	13.3	50	3868.106 
	type g		3	3.09 × 0.19	16.8	50	3868.107 
9	Corner deck, adjustable steel, for angles from 45° – 90°, with toe board		3	0.61	21.5	30	3819.000 
10	U-corner deck for circular scaffolding 30°		6	0.73	8.5	120	3868.000 
11	U-corner deck						
	steel for 0.39 m wide scaffolding		3	0.36 × 0.36	6.4	50	2630.037 
	steel, for 0.73 m wide scaffolding		3	0.73 × 0.73	20.8	30	2630.070 
12	U-console corner deck			0.19 × 0.19	2.1	100	3868.319 
				0.32 × 0.32	3.7	50	3868.332 
13	U-deck for equalisation bay for bridings up to 0.50 m		6	0.50 × 0.19	4.7	100	3868.019 
			6	0.50 × 0.32	7.5	100	3868.032 
			6	0.50 × 0.61	14.8	100	3868.061 
14	Access ladder T19 steel, 7 rungs			2.15 × 0.35	7.6	70	4009.007
15	U-robust hatch-type access deck, 0.61 m wide, hatch offset aluminium stile section, plywood panel BFU 100G, phenolic resin coating and rot protection, lightweight, non-slip, easily stackable	IND	3	1.57 × 0.61	14.2	40	3858.157 
		IND	3	2.07 × 0.61	17.2	40	3858.207 
16	U-robust hatch-type access deck, 0.61 m wide, hatch offset, with integrated access ladder aluminium stile section, plywood panel BFU 100G, phenolic resin coating and rot protection, lightweight, non-slip, easily stackable	IND	3	2.57 × 0.61	25.2	40	3859.257 
		IND	3	3.07 × 0.61	28.4	40	3859.307 
17	U-aluminium access deck, 1.00 m long lightweight access deck with aluminium deck surface and aluminium access hatch	IND	3	1.00 × 0.61	10.0	40	3851.100 
18	U-aluminium access deck, 0.61 m wide, hatch offset lightweight access deck with aluminium deck surface and aluminium access hatch	IND	3	2.07 × 0.61	17.6	40	3875.207 
19	U-aluminium access deck, 0.61 m wide, hatch offset, with integrated access ladder lightweight access deck with aluminium deck surface and aluminium access hatch	IND	3	2.57 × 0.61	25.0	40	3875.257 
		IND	3	3.07 × 0.61	29.0	40	3875.307 

O-Scaffolding decks

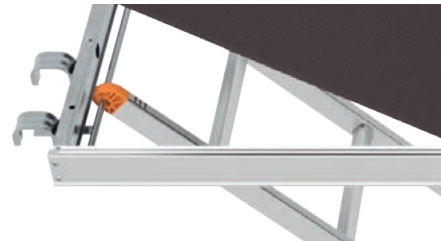

Individual stamping

The Layher steel decks can be provided with individual lettering. Conspicuously visible on the side section, they give the Layher steel deck that certain something. These customised stampings also offer you high-quality theft protection.


Further information, you can find in the Layher Info "Personalised Products".

Similar to the steel decks also the Stalu, Xtra-N and robust decks can be individualized. The stamping is particularly high-quality. The needle stamping process provides fine and very precise lettering.

CO₂-reduced steel deck variant LW

Less CO₂ means more sustainability. The steel deck LW is also available in a CO₂-reduced version. When you purchase the CO₂-reduced version, you will receive a confirmation and a declaration of the CO₂ footprint for each item – with a TÜV stamp. Please contact us.

Further information can be found in the Layher Info 'CO₂-reduced steel deck LW'.

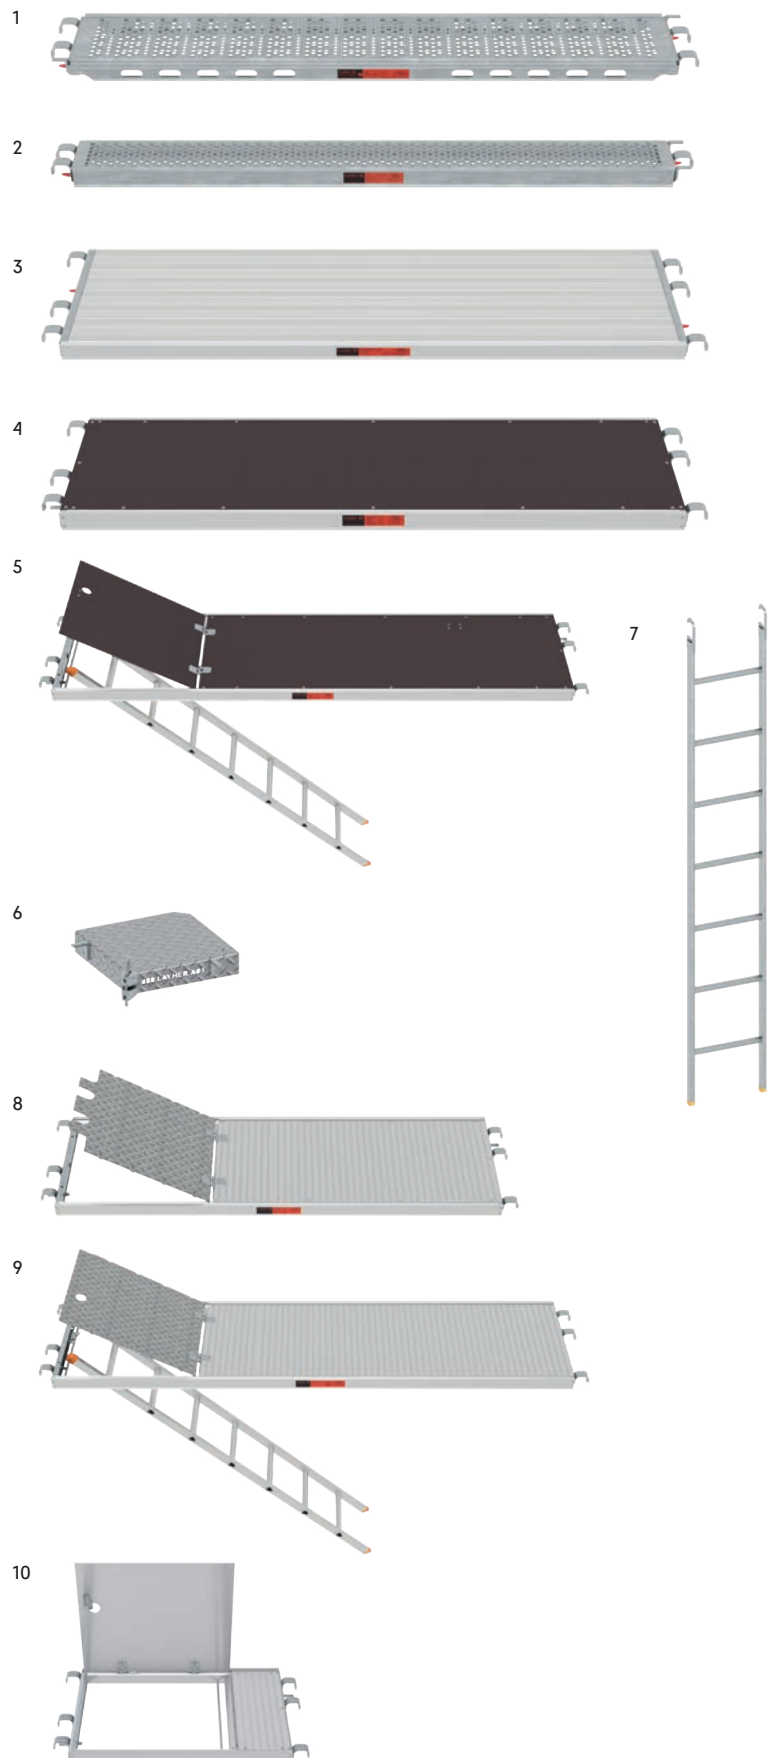

Pos.	Description		LC	Dimensions L/H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	O-steel deck LW, 0.32 m wide steel, hot-dip galvanised, with integrated swivelling lift-off and tilt preventer, perforated, non-slip working surface	IND	6	0.73 × 0.32	6.4	30	3890.073
		IND	6	1.00 × 0.32	7.6	30	3890.100
		IND	6	1.09 × 0.32	8.5	30	3890.109
		IND	6	1.29 × 0.32	9.3	30	3890.129
		IND	6	1.40 × 0.32	10.1	30	3890.140
		IND	6	1.50 × 0.32	10.8	30	3890.150
		IND	6	1.57 × 0.32	11.3	30	3890.157
		IND	6	2.00 × 0.32	13.7	30	3890.200
		IND	6	2.07 × 0.32	14.2	30	3890.207
		IND	5	2.50 × 0.32	16.9	30	3890.250
		IND	5	2.57 × 0.32	17.2	30	3890.257
		IND	4	3.00 × 0.32	19.6	30	3890.300
		IND	4	3.07 × 0.32	20.1	30	3890.307
2	O-steel deck T9, 0.19 m wide steel, hot-dip galvanised, with integrated swivelling lift-off and tilt preventer, perforated, non-slip working surface	IND	6	0.73 × 0.19	4.5	50	3863.073
		IND	6	1.09 × 0.19	6.1	50	3863.109
		IND	6	1.40 × 0.19	7.4	50	3863.140
		IND	6	1.57 × 0.19	8.2	50	3863.157
		IND	6	2.07 × 0.19	10.4	50	3863.207
		IND	5	2.57 × 0.19	12.7	50	3863.257
		IND	4	3.07 × 0.19	14.9	50	3863.307
3	O-stalu deck T21 lightweight aluminium deck with sturdy, riveted steel caps	IND	6	1.57 × 0.61	12.9	30	3888.157
		IND	6	2.07 × 0.61	16.1	30	3888.207
		IND	5	2.57 × 0.61	19.3	30	3888.257
		IND	4	3.07 × 0.61	22.5	30	3888.307
4	O-robust deck T9, 0.61 m wide aluminium stile section, plywood panel BFU 100G, phenolic resin coating and rot protection, lightweight, non-slip, easily stackable		3	0.73 × 0.61	8.7	60	3870.073
		IND					
			3	1.09 × 0.61	11.2	60	3870.109
		IND					
			3	1.57 × 0.61	14.6	40	3870.157
		IND					
			3	2.07 × 0.61	17.9	40	3870.207
		IND					
			3	2.57 × 0.61	21.9	40	3870.257
		IND					
			3	3.07 × 0.61	26.5	40	3870.307
		IND					
5	O-robust access deck T9, 0.61 m wide with integrated access ladder		3	2.57 × 0.61	25.9	40	3872.257
		IND					
			3	3.07 × 0.61	29.7	40	3872.307
		IND					
6	O-corner deck steel, for 0.36 m wide scaffolding		3	0.34 × 0.34	6.9	50	2630.040
7	Access ladder T19 steel, 7 rungs			2.15 × 0.35	7.6	70	4009.007
8	O-access deck T9 aluminium 0.61 m wide, easy access with aluminium deck surface and aluminium access hatch		3	1.57 × 0.61	14.9	40	3871.157
		IND					
			3	2.07 × 0.61	17.9	40	3871.207
		IND					
			3	2.57 × 0.61	26.5	40	3874.257
		IND					
10	O-access deck T9, 1.00 m long aluminium 0.61 m wide, easy access with aluminium deck surface and aluminium access hatch	IND	3	1.00 × 0.61	10.0	40	3871.100


Steel plank, cover plates

The **steel plank 1** is a very safe bridging element capable of bearing high loads for all scaffolding systems. It is preferred to wooden planks for use in areas with stringent fire protection requirements.


The steel plank Xtra-Slim 2

- Comfortable working environment with secure footing even at bridging structures in corner areas thanks to the low component height of only 20 mm, the proven surface structure and ease of securing.
- Ergonomic installation and removal thanks to the low weight of only 5.2 kg.
- Effective up to load class 6 and versatile enough to be used in bridging structures with spans of up to 80 cm.
- Rapid return on investment and resource-friendly in use thanks to long service life and flexible, system-independent usage in the Allround, AGS and SpeedyScaf systems.


The support length must be at least 10 cm at every support.

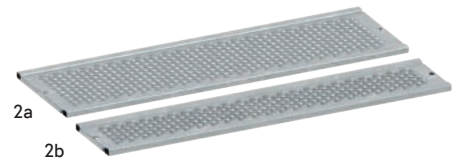

Bridging length for steel planks
plane bearing



punctual bearing

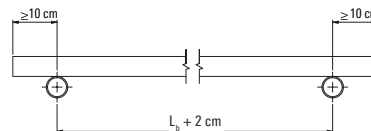


Maximum span L_0 dependable on the used
load class

	Permissible $p^{1)}$ [kN/m ²]	max L_0	
		steel plank 300	steel plank 200
Load class 3	2.0	2.80	
Load class 4	5.0	2.10	2.43
Load class 5	7.5	1.73	2.10
Load class 6	10.0	1.50	1.82



1) on the whole deck surface



Every plank has to be secured at every bearing point with two **locking pins 3** against slipping and lifting-off. If **securing screws 4** are used, one screw per end is enough.

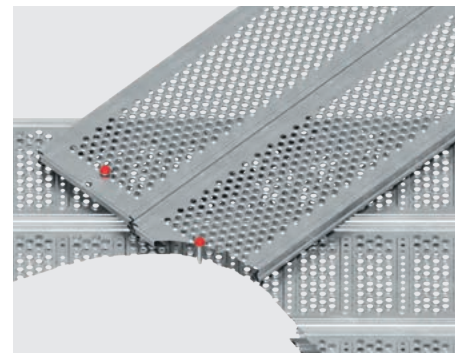

The **cover plate 320 5/6** can be used between two scaffolding decks on SpeedyScaf and Allround Scaffolding. For use on openings widths up to 20 cm.

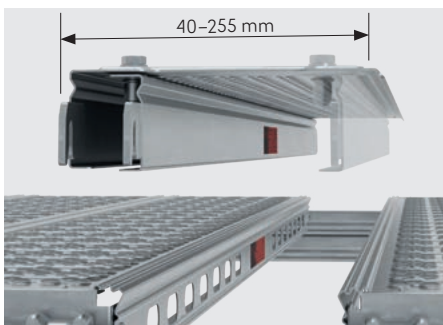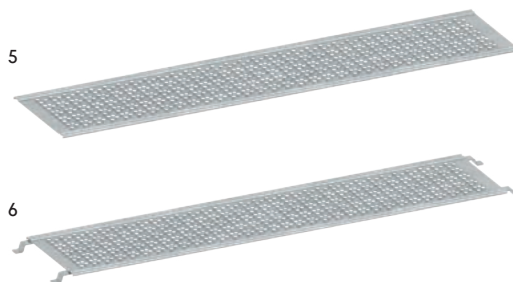


To create a completely closed deck surface, the **telescoping U-system deck 7** can be used.



Pos.	Description	LC	WS [mm]	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Steel plank						
a	4.5 cm high, 0.30 m system-free, completely made of hot-dip galvanised steel	6		1.00 × 0.30	6.3	30	3880.100 
		6		1.50 × 0.30	9.3	30	3880.150 
		4		2.00 × 0.30	12.3	30	3880.200 
		3		2.50 × 0.30	15.3	30	3880.250 
		3		3.00 × 0.30	18.3	30	3880.300 
b	4.5 cm high, 0.20 m system-free, completely made of hot-dip galvanised steel	6		1.00 × 0.20	4.8	100	3878.100 
		6		1.50 × 0.20	7.2	100	3878.150 
		6		2.00 × 0.20	9.5	100	3878.200 
		4		2.50 × 0.20	11.8	100	3878.250 
		3		3.00 × 0.20	14.2	50	3878.300 
2	Steel plank Xtra-Slim						
	2.0 cm high, 0.30 m system-free, completely made of hot-dip galvanised steel	6		1.00 × 0.30	5.2	30	3887.100 
	2.0 cm high, 0.20 m system-free, completely made of hot-dip galvanised steel 	6		1.00 × 0.20	3.9	30	3887.000 
3	Locking pin for steel plank d=11 mm not for multiple use			0.08	0.5	100 	3800.013
4	Securing screw						
a	long (red), steel galvanised, for securing of steel planks on steel decks		19	0.08 × 0.03	4.0	50 	3800.016 
			22	0.08 × 0.03	4.0	50 	3800.017 
b	short (blue), steel galvanised, for securing of cover plate 320 on steel decks		19	0.04 × 0.02	2.3	50 	3800.018 
			22	0.04 × 0.02	2.3	50 	3800.019 
5	Cover plate 320, steel, 0.32 m						
	for 0.73 m bay length	6		0.73 × 0.32	2.6	150	3881.000 
	for 1.09 m bay length	6		1.09 × 0.32	3.8	150	3881.001 
	for 1.57 m bay length	6		1.57 × 0.32	4.2	100	3881.002 
	for 2.07 m bay length	6		2.07 × 0.32	6.3	100	3881.003 
	for 2.57 m bay length	6		2.57 × 0.32	8.5	100	3881.004 
	for 3.07 m bay length	6		3.07 × 0.32	12.0	100	3881.005 
6	Cover plate 320 with hooks, 0.32 m						
	for 1.57 m bay length	6		1.57 × 0.32	4.5	100	3882.157 
	for 2.07 m bay length	6		2.07 × 0.32	6.6	100	3882.207 
	for 2.57 m bay length	6		2.57 × 0.32	8.8	100	3882.257 
	for 3.07 m bay length	6		3.07 × 0.32	12.3	100	3882.307 
7	Telescoping U-system deck closes openings from 40 to 255 mm, continously adjustable	6		0.73	5.2	40	3881.073 
		6		1.09	7.8	40	3881.109 
		6		1.40	10.1	40	3881.140 
		6		1.57	11.4	40	3881.157 
		6		2.07	14.9	40	3881.207 
		5		2.57	18.6	40	3881.257 
		4		3.07	22.3	40	3881.307 
8	U-deck 110 0.11 m with wedge heads			0.73	4.5	150	2602.073 
				1.09	5.9	50	2602.109 
				1.40	6.9	50	2602.140 
				1.57	7.8	50	2602.157 
				2.07	8.5	50	2602.207 
				2.57	10.1	50	2602.257 
				3.07	13.5	50	2602.307 
9	U-cover ledger 80 LW for a closed decking on surface scaffolding with the stalu-deck 50			0.73 × 0.08	4.6	200	2677.073 
				1.09 × 0.08	6.7	50	2677.109 
				1.40 × 0.08	8.5	50	2677.140 
				1.57 × 0.08	9.5	50	2677.157 
				2.07 × 0.08	12.4	50	2677.207 
				2.57 × 0.08	15.4	50	2677.257 

Toe boards

The **O-board bearer 1** is used to provide trip-proof 1 decking surfaces with boards. For use of scaffolding boards see DIN 4420. Accesses with O-decks can also be provided.

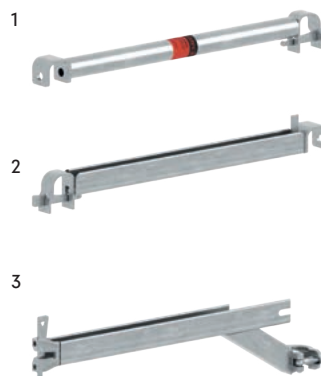

The **U-ledger LW**, 0.73 m, 15° – 44°, WS 19 **3** permits low angles in large circular scaffolding structures.

The three-part side protection in the scaffolding bay and at the ends of the scaffolding is completed with toe boards. The fitting is positioned between vertical standard and wedge.

The **O-/U-steel toe board T18 6/7** reduces the fire risk. The offset fittings permit a closed transition from the deck to the toe board. It features high stiffness and is easy to stack.



The **O-/U-toe board, aluminium 8/9** is the lightweight alternative and can also be used in the case of special fire protection requirements.



Assembly of the wooden toe board



Assembly of the steel toe board

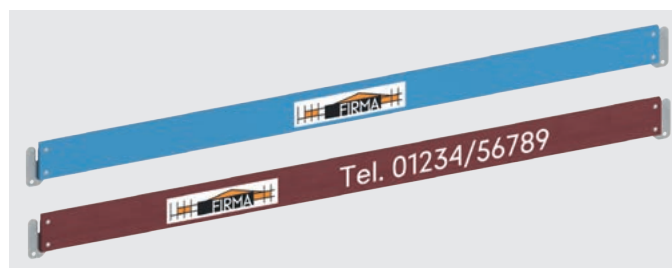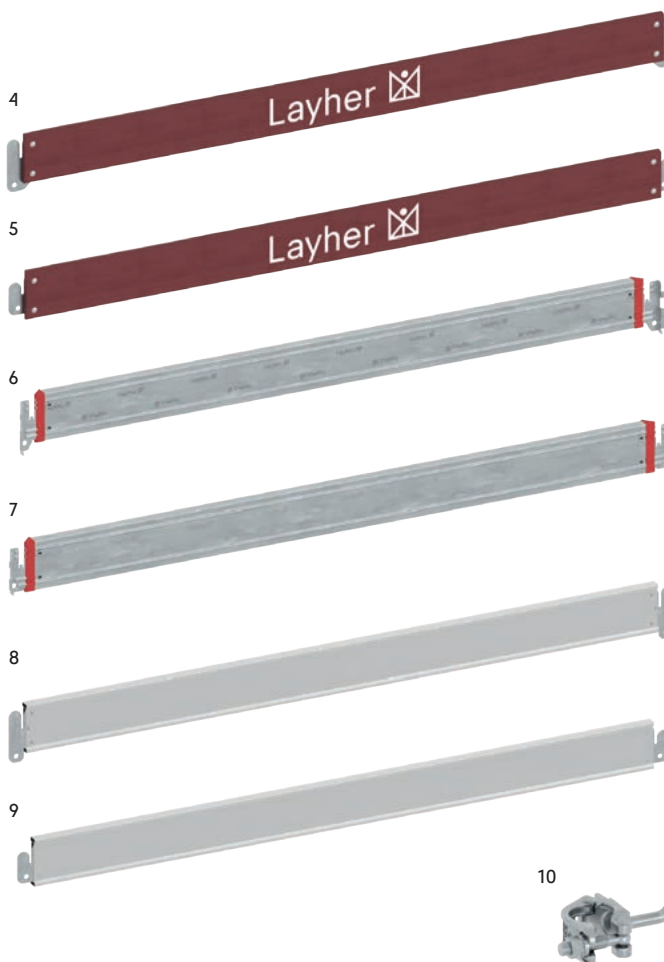

Individual toe boards


The toe boards can be personalised with your company name or logo and can be customised in terms of colour. RAL colour check on request.

Further information, you can find in the Layher Info "Personalised Products".


Pos.	Description	WS [mm]	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	O-board bearer steel		0.73	3.7	50	2615.073 
			1.09	4.6	50	2615.109 
			1.40	5.3	50	2615.140 
			1.57	7.4	50	2615.157 
			2.07	10.3	50	2615.207 
			2.57	12.5	50	2615.257 
			3.07	15.0	50	2615.307 
2	U-board bearer 0.73 m		0.73	3.6	50	2615.000 
3	U-ledger LW 0.73 m, 15° – 44°	19	0.73	3.6	100	2618.000 
4	U-toe board, wood for decks with U-insertion, for longitudinal and end sides	IND	0.73 × 0.15	1.9	140	2640.073
		IND	1.09 × 0.15	2.5	140	2640.109
		IND	1.40 × 0.15	3.1	140	2640.140
		IND	1.57 × 0.15	3.4	140	2640.157
		IND	2.07 × 0.15	4.3	140	2640.207
		IND	2.57 × 0.15	5.2	140	2640.257
		IND	3.07 × 0.15	6.1	140	2640.307
		IND	4.14 × 0.15	8.0	140	2640.414 
5	O-toe board, wood for decks with O-insertion, for longitudinal and end sides	IND	0.73 × 0.15	1.7	140	2642.073
		IND	1.09 × 0.15	2.4	140	2642.109
		IND	1.40 × 0.15	2.9	140	2642.140
		IND	1.57 × 0.15	3.3	140	2642.157
		IND	2.07 × 0.15	4.1	140	2642.207
		IND	2.57 × 0.15	5.0	140	2642.257
		IND	3.07 × 0.15	5.9	140	2642.307
6	U-steel toe board T18 for decks with U-insertion, for longitudinal and end sides		0.73 × 0.15	1.8	280	2644.073 
			1.09 × 0.15	2.5	140	2644.109 
			1.40 × 0.15	3.1	140	2644.140 
			1.57 × 0.15	3.4	140	2644.157 
			2.07 × 0.15	4.4	140	2644.207 
			2.57 × 0.15	5.4	140	2644.257 
			3.07 × 0.15	6.3	140	2644.307 
7	O-steel toe board T18 for decks with O-insertion, for longitudinal and end sides		0.73 × 0.15	1.7	280	2643.073 
			1.09 × 0.15	2.4	140	2643.109 
			1.40 × 0.15	3.0	140	2643.140 
			1.57 × 0.15	3.3	140	2643.157 
			2.07 × 0.15	4.3	140	2643.207 
			2.57 × 0.15	5.3	140	2643.257 
			3.07 × 0.15	6.2	140	2643.307 
8	U-toe board, aluminium for longitudinal and end sides, lightweight and durable		0.73 × 0.15	1.5	210	2651.073 
			1.09 × 0.15	2.2	210	2651.109 
			1.40 × 0.15	2.9	210	2651.140 
			1.57 × 0.15	3.1	210	2651.157 
			2.07 × 0.15	3.7	210	2651.207 
			2.57 × 0.15	4.7	210	2651.257 
			3.07 × 0.15	5.7	210	2651.307 
9	O-toe board, aluminium for longitudinal and end sides, lightweight and durable		0.73 × 0.15	1.5	210	2641.073 
			1.09 × 0.15	1.7	210	2641.109 
			1.40 × 0.15	2.9	70	2641.140 
			1.57 × 0.15	3.1	210	2641.157 
			2.07 × 0.15	3.3	210	2641.207 
			2.57 × 0.15	4.1	210	2641.257 
			3.07 × 0.15	4.9	210	2641.307 
10	Half-coupler with toe board pin	19		1.0	25	4708.019
		22		1.0	25	4708.022

Couplers, accessories and anchoring

The **wedge-head coupler 1a/1b** serves to connect $d=48.3$ mm scaffolding tubes to the rosettes of the standards.




The **wedge-head coupler double 1c** is for connecting several standards to each other, e.g. for combining standards in support scaffolding construction.



Scaffolding couplers 2-5 connections, in steel, drop-forged; as per DIN EN 74-1 or Z-8.331-947. Tightening torque of collar nuts 50 Nm.

Further information can be found in the **catalogue for System-free Accessories**.

Scaffolding must be anchored vertically to and parallel with the facade with resistance to both tensile and compressive stress. The **Allround wall tie, 0.80 m 8** must be secured with a standard coupler to the standard and supported with the fork plate on the U-section of the transverse ledger.

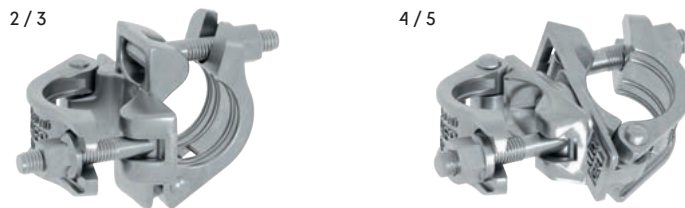


For right-angled connection of tubes with $d=48.3$ mm.

For connection at any angle of tubes with $d=48.3$ mm.



For connection at any angle of tubes with $d=33,7$ mm.

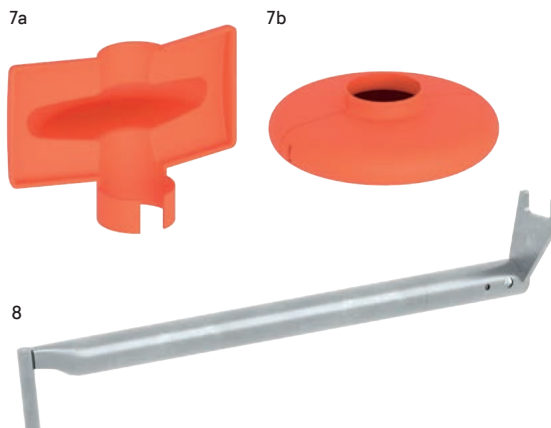


Pos.	Description	WS [mm]	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Wedge-head coupler					
a	rigid	19		1.1	25	2628.019
		22		1.1	25	2628.022
b	swivelling	19		1.5	25	2629.019
		22		1.5	25	2629.022
c	double			1.2	25	2629.000
2	Double coupler steel, galvanised	19		1.3	25	4700.019
		22		1.3	25	4700.022
3	Rapid double coupler description as 4700.xxx, acc. to approval Z-8.331-947	19		1.3	25	4777.019
		22		1.3	25	4777.022
4	Swivel coupler steel, galvanised	19		1.5	25	4702.019
		22		1.5	25	4702.022
5	Rapid swivel coupler description as 4702.xxx, acc. to approval Z-8.331-947	19		1.5	25	4778.019
		22		1.5	25	4778.022
6	Swivel coupler 33.7 mm steel, galvanised	19		1.2	450	4704.019
7	Allround rosette cover					
	with connected ledger, polyethylene, fixing with disposable tie			0.7	10	4007.012
	without connected ledger, polyethylene, fixing with disposable tie			0.9	10	4007.013
8	Allround wall tie 0.80 m		0.80	3.3	100	2639.080
9	Wall tie		0.20	0.9	250	1754.020
			0.38	1.6	250	1754.038
			0.69	2.8	50	1754.069
			0.95	3.7	50	1754.095
			1.45	5.7	50	1754.145
			1.75	5.8	50	1754.175
10	Plastic wall insert plastic drilled hole d=14 mm		70 mm	0.3	25	4008.072
			100 mm	0.3	25	4008.102
			135 mm	0.3	25	4008.137
11	Ring screw steel, galvanised d=12 mm, for expanding plug		95 mm	1.6	10	4009.097
			120 mm	1.8	10	4009.122
			190 mm	2.5	10	4009.192
			230 mm	3.0	10	4009.232
			300 mm	3.5	10	4009.302
			350 mm	5.0	10	4009.352

Brackets

Widening of scaffolding can be easily performed by fitting brackets in the rosette on the standard. System decks in brackets must be secured against lifting off with the lift-off preventer.

Widened scaffolding can also be constructed with O-ledgers or U-transverse ledgers, base collar and diagonal braces in any projection depending on the working load. Structural strength verification is required here for each individual case.

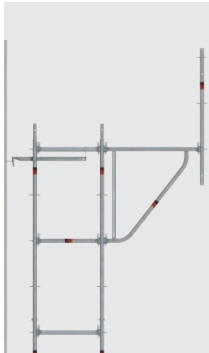


The **O-console bracket LW**, 1.09 m wide **6f** is used for widening birdcage scaffolding. Transverse ledger at the height of the lower bracket connection is required. Permissible load capacity: 2.0 kN/m² for bay widths 3.07 m.



U-console bracket, with 2 hooks **2**, suspended from the ledgers, for projecting platforms.




The **bracket brace** 2.05 m **3** is used to support the 0.73 m bracket.



The **U-extension bracket** **4** is used for quick conversion during construction, e.g. when installing external thermal insulation compound systems. It is simply plugged onto the spigot of Allround brackets. No tools are required.

The **O-console bracket**, 0.69 m wide, adjustable **6d** is used incrementally and facilitates optimum stand height and wall distance.

Original Allround Scaffolding from Layher is made up of more than just standards and ledgers: complete system technology with additional parts and accessories to suit the construction site provides for safety and assembly benefits at all sites. System brackets are available for quickly widening scaffolding bays and for converting projecting building parts and eaves.

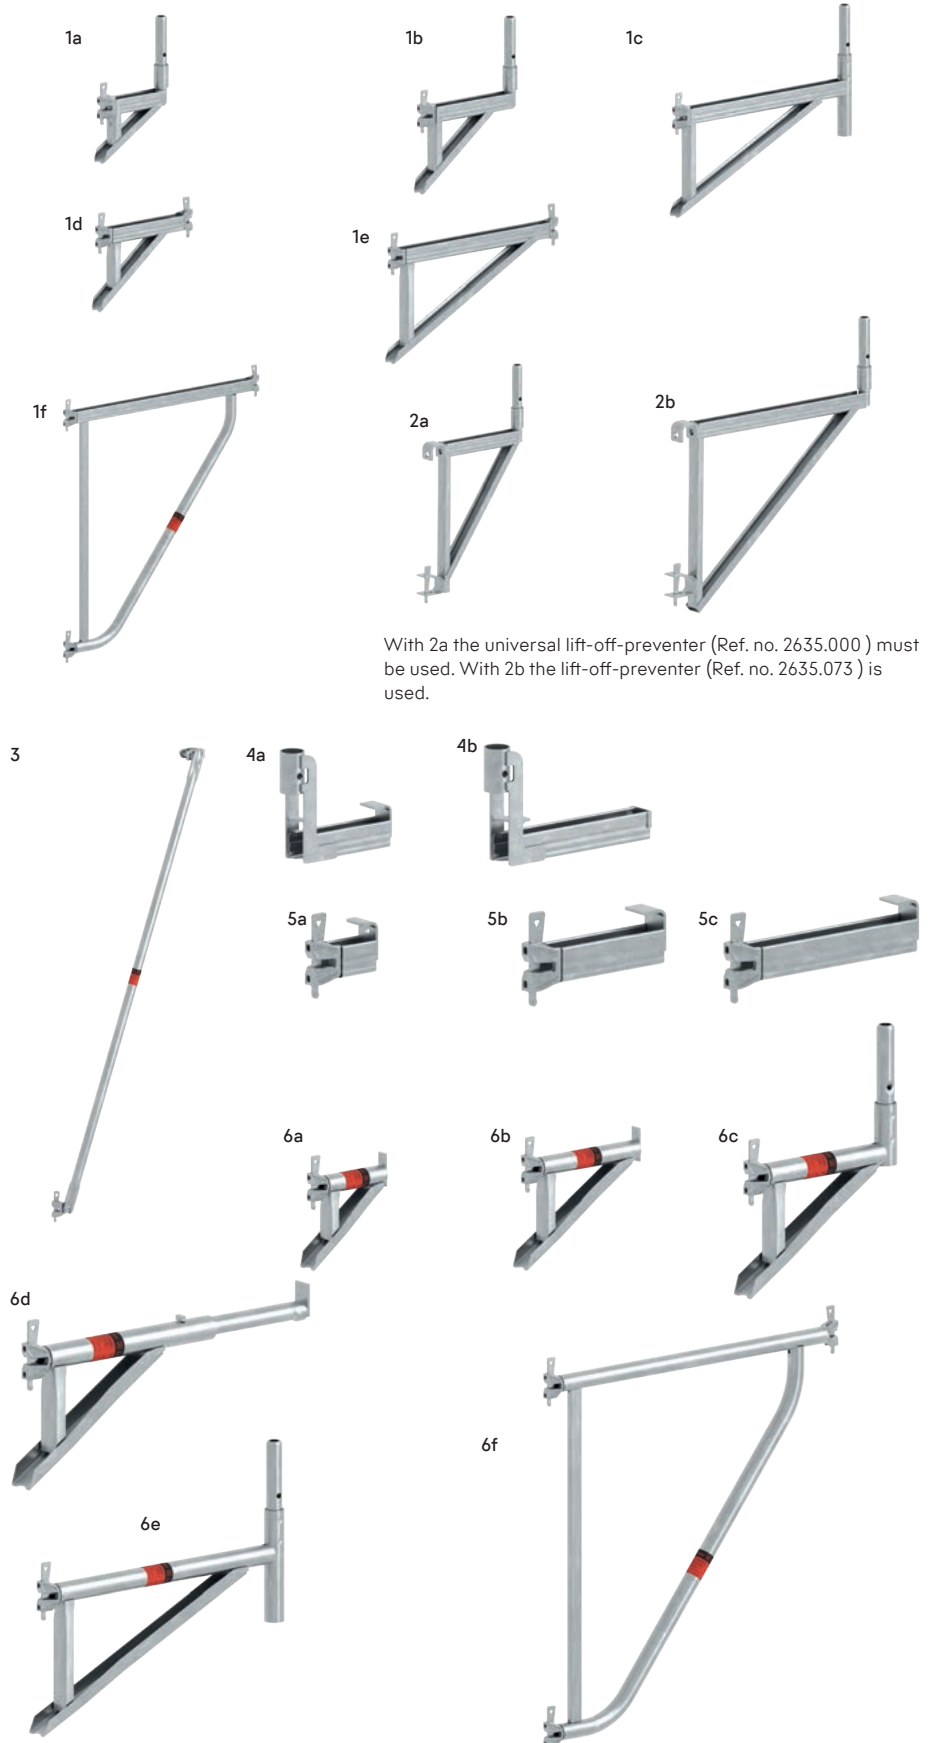



Assembly situation: **U-console bracket LW**, 0.73 m wide **1c** (top) or alternatively **U-ledger 0.73 m** in conjunction with **bracket brace 2.05 m 3** (left).



O-/U-cover ledgers 110 LW, 0.11 m wide are available in a variety of lengths for fully closed deckings between main scaffolding decks and console bracket decks.

Pos.	Description	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	U-console bracket LW				
a	0.28 m wide for U-deck 0.19 m wide, lift-off preventer provided by customer or by 2635.002/003	0.28	3.4	100	2632.019
b	0.39 m wide for U-deck 0.32 m wide	0.39	3.9	125	2632.039
c	0.73 m wide for 2 U-decks 0.32 m or 1 U-deck 0.61 m wide	0.73	6.4	80	2632.073
d	0.45 m wide, with 2 wedge heads for U-decks, 0.32 m wide	0.45	3.1	80	2632.045
e	0.73 m wide, with 2 wedge heads for U-decks, 2 x 0.32 m wide or 1 x 0.61 m	0.73	5.0	80	2632.074
f	1.09 m wide with U-section, for 3 U-decks 0.32 m wide	1.09	12.0	30	2632.109
2	U-console bracket				
a	with 2 hooks, 0.36 m wide for U-decks, 0.32 m wide	0.36	6.6	80	4005.036
b	with 2 hooks, 0.73 m wide for U-decks, 2 x 0.32 m wide or 1 x 0.61 m wide	0.73	8.5	40	4005.073
3	Bracket brace 2.05 m	2.05	8.8	50	2631.205
4	U-extension bracket				
a	0.19 m wide for U-deck 0.19 m wide, with tilting preventer	0.19	1.8	125	2632.000
b	0.32 m wide for U-deck 0.32 m wide, with tilting preventer	0.32	2.1	125	2632.002
5	U-ledger bracket with 1 wedge head				
a	for widening the working space between scaffolding and wall	0.14	1.0	500	2618.014
b	0.26 m wide for U-deck 0.19 m wide, with tilting preventer	0.26	1.4	300	2618.026
c	0.38 m wide for U-deck 0.32 m wide, with tilting preventer	0.38	1.5	250	2618.038
6	O-console bracket				
a	0.26 m wide, without spigot for O-deck 0.19 m wide	0.26	2.3	250	2631.026
b	0.36 m wide, without spigot for O-deck 0.32 m wide	0.36	3.4	125	2630.038
c	0.39 m wide for O-deck 0.32 m wide	0.39	3.9	125	2631.039
d	0.69 m wide, adjustable, pushed in: for accommodating 2 O-decks, 0.19 m, pulled out: for accommodating 3 O-decks, 0.19 m	0.69	4.2	125	2630.069
e	0.73 m wide for 2 O-decks 0.32 m or 1 O-deck 0.61 m wide	0.73	6.8	80	2631.073
f	1.09 m wide for 3 O-decks 0.32 m wide	1.09	10.7	30	2631.109

WS = wrench size LC = load class PU = packaging unit = Layher Individual possible = new in the catalogue = available ex works
 = delivery time on request = only available in this packaging unit = the approval process is not yet completed

Pedestrian protection, roof edge protection, scaffolding enclosure

The U-walkway beam LW 1 is designed for further construction with 0.73 m or 1.09 m wide scaffolding. Additional bracing is required for constructing pedestrian passages.

The heightened side protection specified for roofing work is swiftly assembled in Allround Scaffolding: The side protection nets are attached at the top, at scaffolding deck height, to the O-ledger. Without a quick strap fastener, the protection net is threaded with each loop of its mesh into the O-ledgers. With quick strap fasteners, the side protection net is attached to the O-ledgers at every 750 mm. Toe board and handrail are required.

To protect passers-by and traffic during spraying work and other site work causing dirt, facade scaffolding is covered with tarpaulins and nets.

Layher scaffolding tarpaulins and nets meet the requirements of DIN 4420-1. Compliance with design parameters prevents objects falling from the scaffolding level.



Further information can be found in the catalogue for System-free Accessories.

The Protection nets 2 are attached at the bottom (at scaffolding deck height) and at the top (2 m above the scaffolding deck) to the tubes at every 750 mm. Toe board and handrail are required.


Side protection net 10.00 x 2.00 m

Specification:

Mesh width 100 mm, blue, made of PPM 4.5 mm, knotless, as per DIN EN 1263-1.

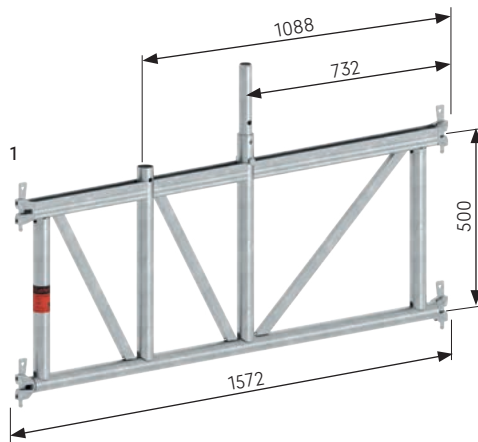


Scaffolding tarpaulin




Scaffolding net

2

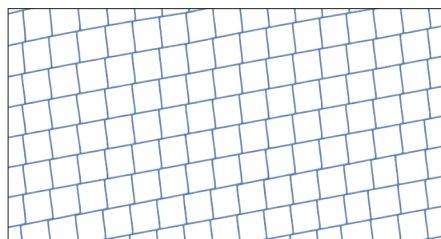

Please order a separate instruction manual for scaffolding nets.

3


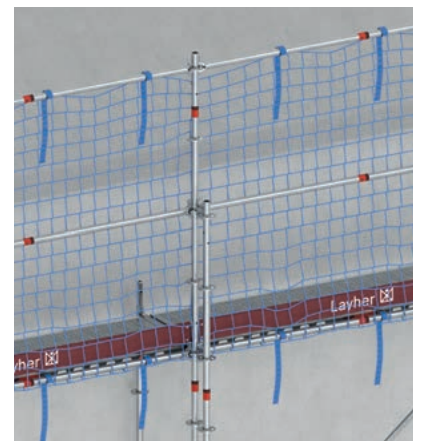


Roof edge protection

Side protection nets must be checked every year!
Side protection nets may only be used within a year of their being tested. If older protection nets are used, it must be verified in tests that the maximum tensile strength of the net yarn is still at least 2 kN. This testing of your Layher side protection nets is free of charge for you. To do so, a test mesh must be sent to Layher. In DIN EN 1263-1, Type U "Protection Nets and Protection Net Accessories, Safety Requirements, Testing" details are also given in 4.3 Instructions for Use, on the "time of removal from service".

In accordance with the guidelines for securing work sites on roads (RSA), scaffolding must be clearly visible from public traffic routes such as pedestrian or cycle paths.

Depending on local conditions, passage-way markings may be required if the clearance height is reduced – for example, in pedestrian tunnels under scaffolding. In order to fulfil the requirements of RSA (Part A) for the protection of scaffolding and pedestrian passages, Layher has developed quickly reusable components made of galvanised steel with red and white retroreflective foil of reflection class RA 2.

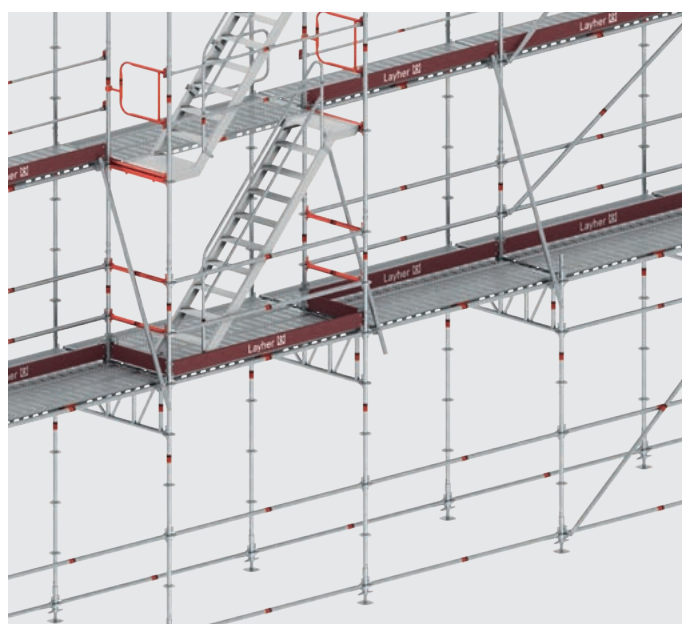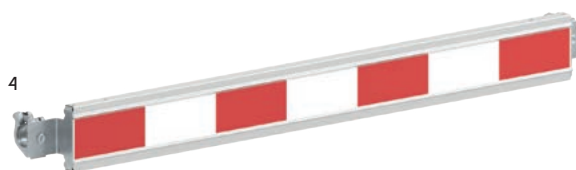

Suitable ledgers, lift-off preventers, end guardrails and toe boards in the appropriate length of 0.84 m are available for integrating external platform stairs on pedestrian tunnels in the AGS system or the Allround Scaffolding.

Pos.	Description	WS [mm]	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	U-walkway beam LW 1.57 m wide Steel up to load class 4, up to bay length 3.07 m and load class 4: max. assembly height 14 m		1.57 × 0.50	20.9	25	2666.157
2	Protection net with quick strap fastener, mesh width 100 mm, blue, made of PPM 4.5 mm, knotless, as per DIN EN 1263-1, type U		10.00 × 2.00	6.2	40	6232.002
3	Quick strap fastener		0.50	1.5	50	6235.002
4	Passageway marking 1.50 m with rotating half-couplers	19	1.50	5.6	50	4000.150
5	O-ledger LW steel, with AutoLock function		0.84	3.3	50	2601.084
6	U-ledger LW T14 steel		0.84	3.5	50	2618.084
7	U-Lift-off preventer T8		0.84	1.4	50	2635.084
8	U-toe board, wood for decks with U-insertion, for longitudinal and end sides	 	0.84	2.1	140	2640.084
9	AGS double end guardrail closure of the scaffolding at its end		0.84	4.5	60	2602.092

Platform stairway, Comfort stairway




Safe, fatigue-free stairway ascent – also with transportation of materials – without impairment of the working surface. With the **platform stairway 1/2**, it is simple to construct a 4-standard stairtower, either integrated into the scaffolding or as a free-standing access structure anchored on the building. Both parallel and opposite stairways are possible here. There is no hindrance to work on scaffolding with this version. Permissible load capacity: 2.0 or 2.5 kN/m².

The **comfort stairway 3/4** bases on the platform stairway. It is equipped with 175 mm wide, grooved steps. That leads to more comfortable access – especially for high access heights. The stronger stringer profile offers only small bending guardrails, internal guardrails and stairwell guardrails can be used from the platform stairway.



The **internal stairway guardrail T12 8** is required for opposite stairways and serves to increase the stability of single-flight stairways.

The **stair-guardrail post 10** with the **O-ledger with wedge head and half-coupler 11** is used for the stairwell at the top level. Optionally the exit of the top stair level can be assembled with console brackets. In that case, the stairwell guardrail is not needed.

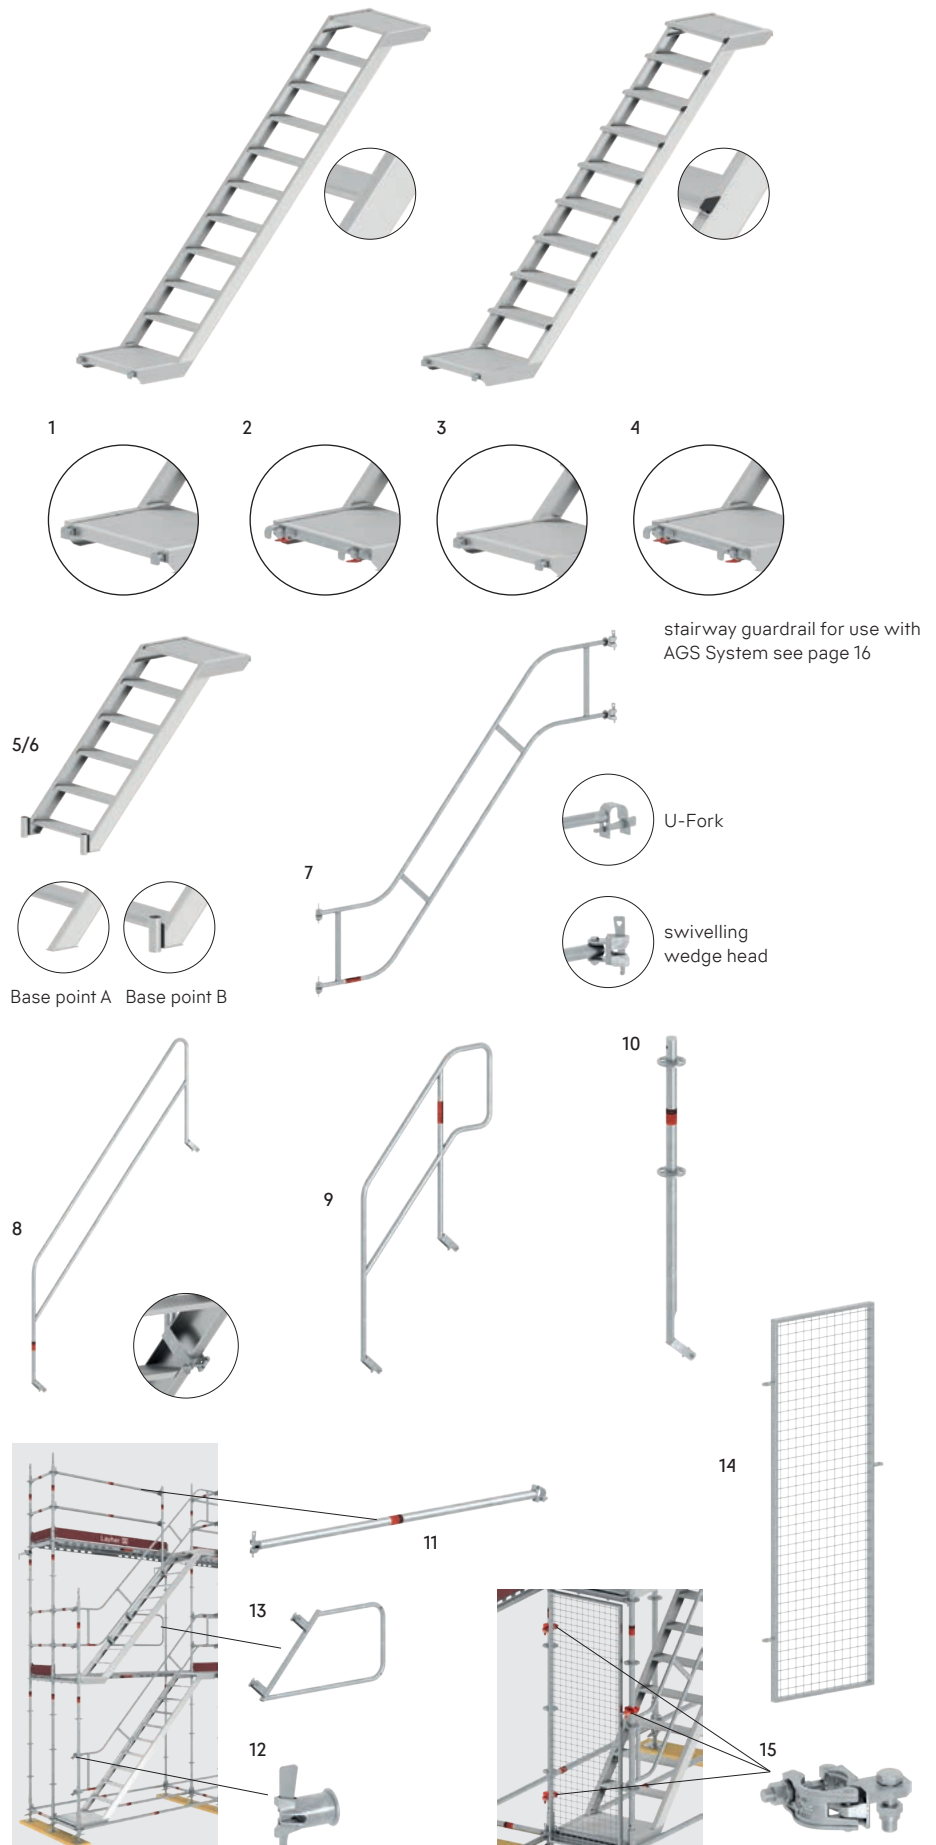

Pos.	Description	WS [mm]	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	U-Platform stair, aluminium, stair class A acc. to EN 12811-1					
	0.64 m wide, 2.5 kN/m², 2.00 m high, for 2.57 m bay length, step height 0.20 m		2.57 × 0.64	21.9	10	1753.257
	0.64 m wide, 2.5 kN/m², 2.00 m high, for 3.07 m bay length, step height 0.20 m		3.07 × 0.64	26.3	10	1753.307
	0.64 m wide, 2.5 kN/m², 1.50 m high, for 2.57 m bay length, step height 0.18 m		2.57 × 0.64	21.5	10	1753.251 
	0.94 m wide, 2.0 kN/m², 2.00 m high, for 2.57 m bay length, step height 0.20 m		2.57 × 0.94	33.7	10	1753.258 
	0.94 m wide, 2.0 kN/m², 2.00 m high, for 3.07 m bay length, step height 0.20 m		3.07 × 0.94	40.1	10	1753.308 
2	O-Platform stair, aluminium, stair class A acc. to EN 12811-1					
	0.64 m wide, 2.5 kN/m², 2.00 m high, for 2.57 m bay length, step height 0.20 m		2.57 × 0.64	23.2	10	2633.257 
	0.64 m wide, 2.5 kN/m², 2.00 m high, for 3.07 m bay length, step height 0.20 m		3.07 × 0.64	27.7	10	2633.307 
	0.64 m wide, 2.5 kN/m², 1.50 m high, for 2.57 m bay length, step height 0.18 m		2.57 × 0.64	22.8	10	2633.258 
3	U-Comfort stair, aluminium, stair class B acc. to EN 12811-1					
	0.64 m wide, 2.5 kN/m², 2.00 m high, for 2.57 m bay length, step height 0.22 m		2.57 × 0.64	27.0	10	1755.257 
	0.64 m wide, 2.5 kN/m², 2.00 m high, for 3.07 m bay length, step height 0.22 m		3.07 × 0.64	32.0	10	1755.307 
	0.94 m wide, 2.0 kN/m², 2.00 m high, for 2.57 m bay length, step height 0.22 m		2.57 × 0.94	37.0	10	1755.258 
4	O-Comfort stair, aluminium, stair class B acc. to EN 12811-1					
	0.64 m wide, 2.5 kN/m², 2.00 m high, for 2.57 m bay length, step height 0.22 m		2.57 × 0.64	29.2	10	2635.257 
	0.94 m wide, 2.0 kN/m², 2.00 m high, for 2.57 m bay length, step height 0.22 m		2.57 × 0.94	39.1	10	2635.258 
5	U-Starting stair, aluminium, stair class A acc. to EN 12811-1					
	0.64 m wide, 2.5 kN/m², 1.00 m high, step height 0.20 m, base point A		1.00 × 0.64	11.5	10	1753.003 
	0.64 m wide, 2.5 kN/m², 1.20 m high, step height 0.20 m, base point B		1.20 × 0.64	13.5	10	1753.002 
	0.64 m wide, 2.5 kN/m², 1.70 m high, step height 0.19 m, base point B		1.70 × 0.64	18.3	10	1753.004 
	0.94 m wide, 2.0 kN/m², 1.00 m high, step height 0.20 m, base point A		1.00 × 0.94	16.8	10	1753.005 
	0.94 m wide, 2.0 kN/m², 1.20 m high, step height 0.20 m, base point B		1.20 × 0.94	17.6	10	1753.006 
	0.64 m wide, 2.5 kN/m², 2.00 m high, step height 0.20 m, base point A  		2.00 × 0.64	20.4	10	1753.007 
6	O-Starting stair, aluminium, stair class A acc. to EN 12811-1					
	0.64 m wide, 2.5 kN/m², 1.00 m high, step height 0.20 m, base point A		1.00 × 0.64	13.8	10	2633.003 
	0.64 m wide, 2.5 kN/m², 1.20 m high, step height 0.20 m, base point B		1.20 × 0.64	15.3	10	2633.002 
7	Stair guardrail, steel galvanised					
	2.00 m high, for 2.57 m bay length, with U-forks		2.57	18.1	30	2638.257
	2.00 m high, for 3.07 m bay length, with U-forks		3.07	20.1	30	2638.307
	2.00 m high, for 2.57 m bay length, with swivelling wedge heads		2.57	18.1	30	2638.258 
	2.00 m high, for 3.07 m bay length, with swivelling wedge heads		3.07	20.1	30	2638.308 
	1.50 m high, for 2.57 m bay length, with U-forks		2.57	17.0	30	2638.251 
8	Internal stairway guardrail T12					
	for 2.57 × 2.00 m bay and 3.07 × 2.00 m bay	19	2.25	13.5	20	1752.007
		22	2.25	13.5	20	1752.008 
	for 2.57 × 1.50 m bay	19	2.00	11.5	20	1752.012 
	1.00 m high	19	0.90	7.8	20	1752.011 
9	Initial stair guardrail	19	0.90 × 1.70	9.9	20	1752.009 
		22	0.90 × 1.70	9.9	20	1752.013 
10	Stair-guardrail post is used for the stairwell at the top level	19	1.30	6.1	28	2638.400 
11	O-ledger with wedge head and half-coupler					
	for 2.57 m bay length, is used for the stairwell at the top level	19	1.90	7.8	50	2638.401 
	for 3.07 m bay length, is used for the stairwell at the top level	19	2.15	9.7	50	2638.402 
12	Stairway guardrail adapter			0.7	25	2637.000
13	Stairwell guardrail	19		6.2	40	1752.004
		22		6.2	40	1752.014 
14	Door lockable		1.96 × 0.77	15.0	20	4780.732 
15	Half coupler with hanger for door	19		1.2	25	4710.019

WS = wrench size LC = load class PU = packaging unit  = Layher Individual possible  = new in the catalogue  = available ex works
 = delivery time on request  = only available in this packaging unit  = the approval process is not yet completed

Modular stairway, outside access, construction stairtower 200

With the modular stairway, accesses that always fit and that match the system can be constructed. Any intermediate dimension can be achieved simply by fitting together the individual stairway parts. The stairway rises 20 cm from step to step, and the bottom element with spindles is used for precise levelling. A wide variety of applications thanks to modular design. Little space needed for transport and assembly.

Constructing outward-facing access bays requires simple **scaffolding ladders 4/5** together with the **swing door 7** and the **guardrail standard, 1.70 m, bended 8**.



Layher pole ladders for scaffolding conform to DIN EN 131 individually or when connected to each other. The stile connections must have proper support and be secured with spring clips. The regulations in DGUV 38 must be followed.


Stairtowers can be used in many areas outside scaffolding construction, e.g. in public areas and as escape stairtowers. The **U- / O-stairway stringer 200**, 10-step **9/10** and the **platform stairway, aluminium** (see page 40) are not just a quick and comfortable means of upward access which permits problem-free vertical transportation of materials and working on all scaffolding levels, they also easily enable stairtowers of differing widths and load capacities to be built for the purpose of rapidly linking up various construction site levels.

U- / O-stairway stringer 200


	10 steps	Permissible load with a stair flight width of 1.29 m
Riser s	20.0 cm	2.0 kN/m²
Tread a	24.1 cm	
Undercut u	7.9 cm	





Height differences from 0.60 m to 1.60 m can be bridged. Load-bearing capacity: 3.0 kN/m². Design: steel, hot-dip galvanized. Connection of elements with bolt, d=12 x 55 mm and safety clip 2.8 mm (2 per joint). They are already included in the scope of delivery.

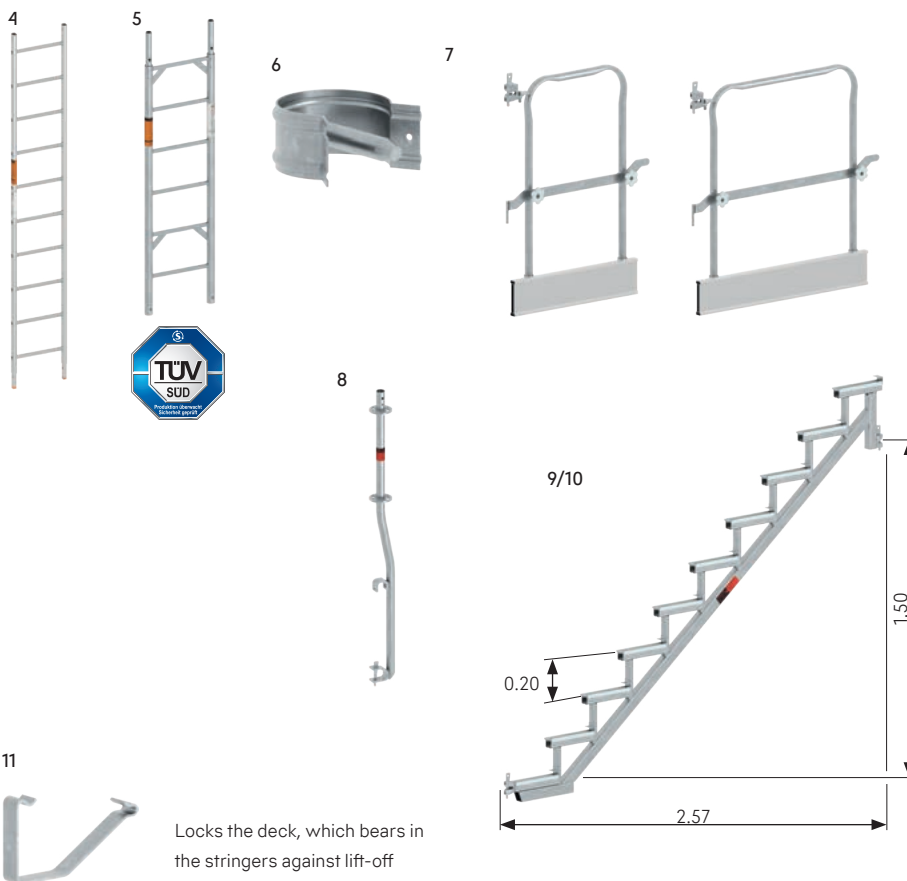


Locks the deck, which bears in the stringers against lift-off

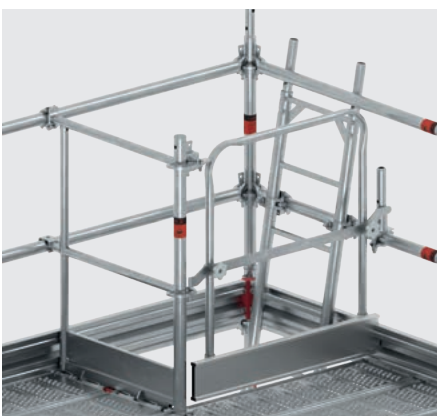

Installation situation of Allround O-side part 13

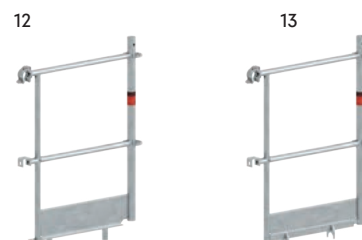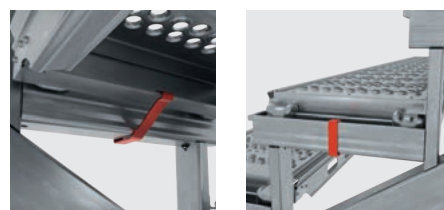

In the 12-standard construction stairtower 200, the stairways are made up of individual U-/O-stairway stringers 200, 10-step and steps made of standard decks. Thus the weights / volumes of the individual parts are lower, the proportions of standard material higher, and the additional costs lower. In addition, different variants of stairway widths are possible.

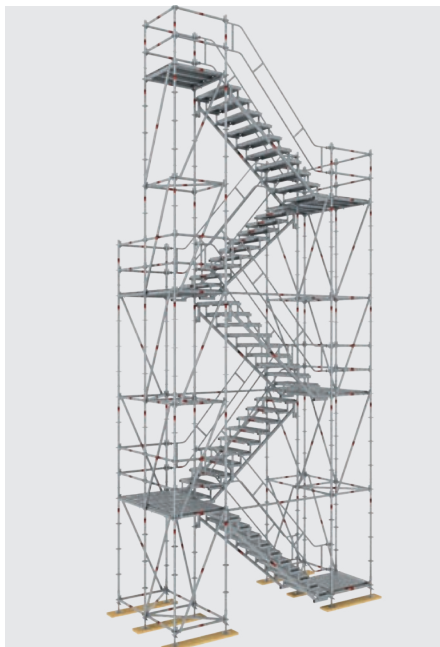

Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	U-stair head section, U-stair head section Spigot preassembled with bolts and safety clips		0.60	10.7	15	2637.060
			0.95	11.7	50	2637.095
2	Stair middle section Spigot preassembled with bolts and safety clips		0.60	9.2	15	2638.060
			0.95	10.2	50	2638.095
3	Stair foot section		0.60	6.8	15	2639.060
			0.95	7.8	50	2639.095
4	Pole ladder, aluminium					
	extendable with 10 rungs		2.90 x 0.46	5.4	50	1004.010
	extendable with 14 rungs		4.00 x 0.46	8.1	50	1004.014
	extendable with 17 rungs		4.90 x 0.46	12.0	50	1004.017
	extendable with 20 rungs		5.70 x 0.46	16.9	50	1004.020
5	Steel pole ladder					
	extendable with 6 rungs		1.50 x 0.43	12.0	50	1002.006
	extendable with 8 rungs		2.00 x 0.43	15.0	50	1002.008
	extendable with 12 rungs		3.00 x 0.43	21.5	50	1002.012
	extendable with 16 rungs		4.00 x 0.43	28.0	50	1002.016
6	Spring clip steel			0.1	20	1250.000
7	Swing door					
	0.73 m, adjustable		0.73	7.8	40	2627.073
	1.00 m, adjustable		1.00	9.2	40	2627.100
8	Guardrail standard 1.70 m, bended		1.70	8.5	50	2606.170
9	U-stairway stringer 200 10 steps, 2.00 m storey height		2.00 x 2.57	28.4	20	2639.010
10	O-stairway stringer 200 10 steps, 2.00 m storey height		2.00 x 2.57	28.4	20	2638.011
11	Lift-off prevention clamp			1.0	20	2634.032
12	U-side part 0.75 m	19	0.75 x 1.00	11.2	25	2627.018
		22	0.75 x 1.00	11.2	30	2627.016
13	O-side part 0.75 m	19	0.75 x 1.00	11.9	25	2627.017
		22	0.75 x 1.00	11.9	30	2627.015

WS = wrench size LC = load class PU = packaging unit = Layher Individual possible = new in the catalogue = available ex works
 = delivery time on request = only available in this packaging unit = the approval process is not yet completed

Stairtowers 500 and 750

Separate stringers and standard decking ensure variable widths for the stairway (1.09 m, 1.57 m, 2.07 m). This keeps the weight and the volume of the components low and permits a high proportion of standard Layher Allround material to be used. The 16-standard ground plan of the **stairtowers 500** and 750 allows both temporary and stationary stairtower structures of high loading capacity to be built. The stairtower 500 is used for preference in non-public areas, e.g. as access to the construction site, as non-public road crossings during construction work or as additional escape stairtower. In special cases it also can be used in public areas.

U-/O-stairway stringer 500

(with a stair flight width of 2.07 m)

	10 steps	5 steps (U-version)	Permissible load
Riser s	20.0 cm	20.0 cm	5.0 kN/m ²
Tread a	27.5 cm	29.0 cm	
Undercut u	4.5 cm	3.0 cm	


The **stairtower 750** with child protected guardrail is thanks to its riser measures mainly used in public areas and event constructions as access to stages and grandstands. Its features are the high load-bearing capacity and the reduced stairway riser.

U-/O-stairway stringer 750

(with a stair flight width of 2.07 m)

	8 steps	5 steps	2 steps	Permissible load
Riser s	16.6 cm	16.7 cm	16.7 cm	7.5 kN/m ²
Tread a	31.0 cm	29.0 cm	32.7 cm	
Undercut u	1.0 cm	3.0 cm	-0.7 cm	

A height adjustment outside the 2.00 m or 1.50 m standard dimension is achieved with 5-step stairway stringers (1.00 m high). Alternatively, the stairway stringers 500 and 750 can also be combined in the stairtower structure, while the riser needs to be constant within one storey stairway. The stairtower structures must be verified for each single structure as regards structural strength.

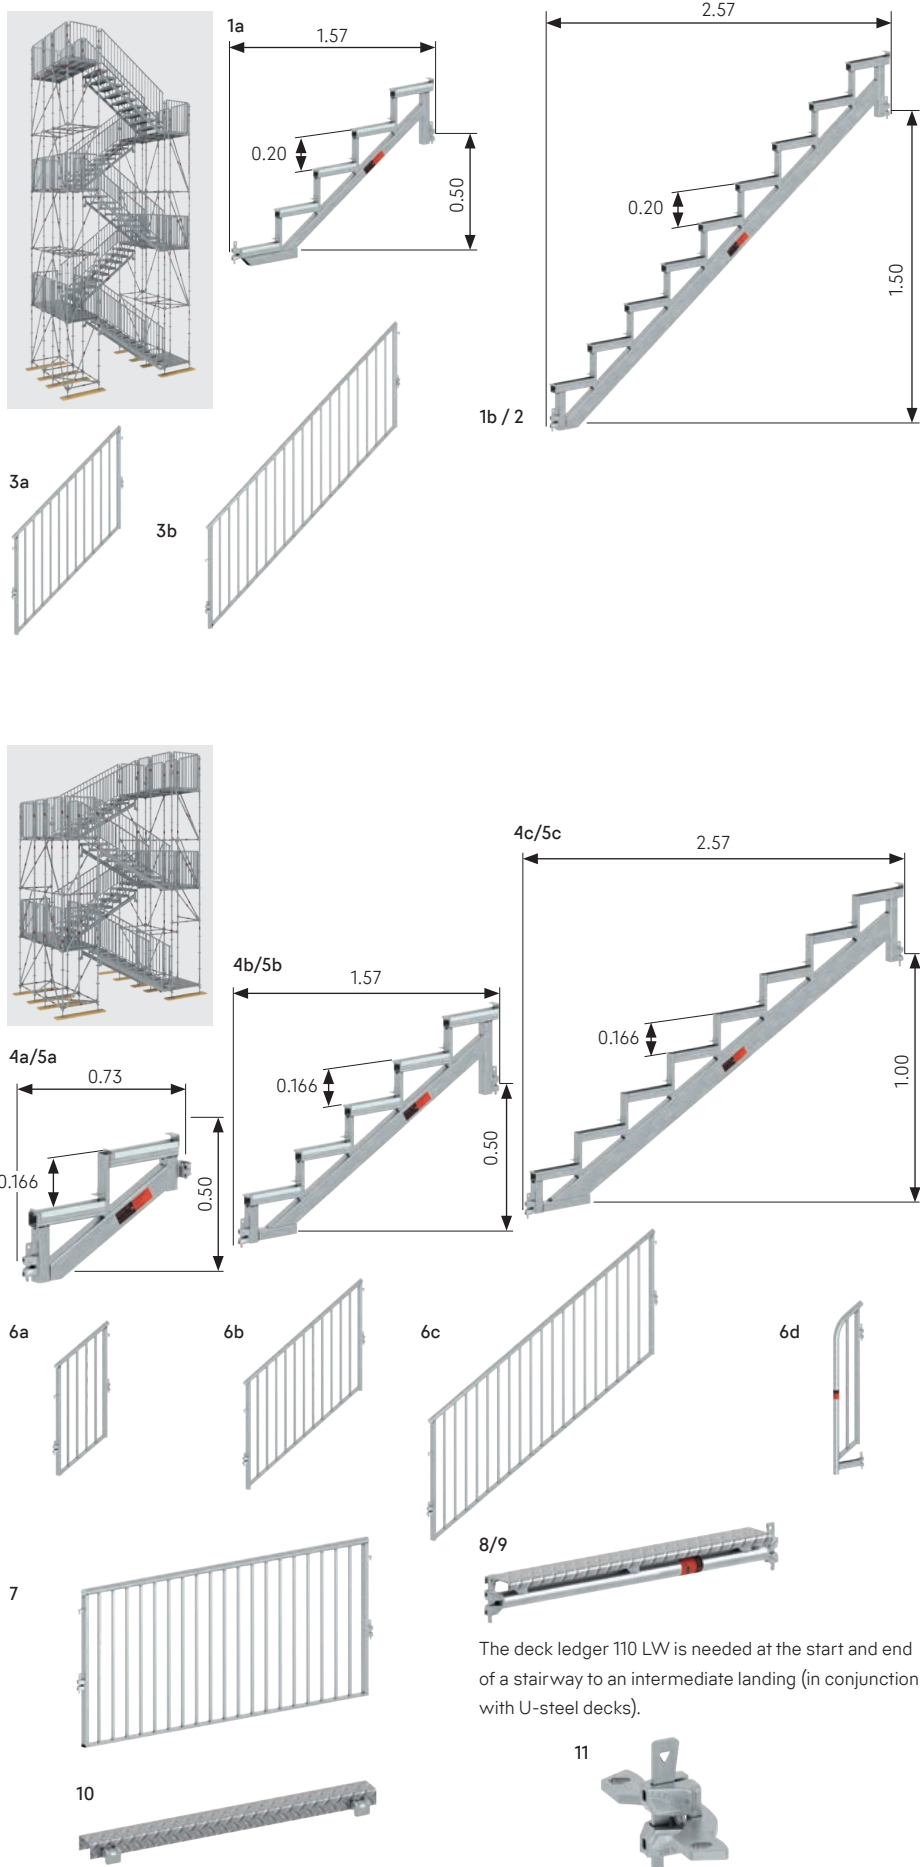

The deck ledger 110 LW is needed at the start and end of a stairway to an intermediate landing (in conjunction with U-steel decks).



Assembly situation
Initial guardrail **6d**




Installation situation of guardrail fixing device **11**
Installation situation of the U-cover ledger **110 LW 8**

Pos.	Description	LC	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	U-stairway stringer 500 LW					
a	5 steps (1.00 m storey height)		1.00 × 1.57	18.0	20	2639.004
b	9 steps (2.00 m storey height)		2.00 × 2.57	34.0	20	2639.009
2	O-stairway stringer 500 LW 9 steps (2.00 m storey height)		2.00 × 2.57	36.0	20	2638.012
3	Stair guardrail 500 T12 with child protection					
a	5 steps (1.00 m storey height)		1.00 × 1.57	24.8	25	2616.104
b	9 steps (2.00 m storey height)		2.00 × 2.57	35.8	25	2616.100
4	U-stairway stringer 750 LW					
a	2 steps (0.50 m storey height)		0.50 × 0.73	8.9	20	2639.002
b	5 steps (1.00 m storey height)		1.00 × 1.57	19.2	20	2639.005
c	8 steps (1.50 m storey height)		1.50 × 2.57	36.4	20	2639.008
5	O-stairway stringer 750 LW					
a	2 steps (0.50 m storey height)		0.50 × 0.73	10.8	20	2638.013
b	5 steps (1.00 m storey height)		1.00 × 1.57	19.9	20	2638.014
c	8 steps (1.50 m storey height)		1.50 × 2.57	37.2	20	2638.015
6	Stairway guardrail 750, with child protection					
a	2 steps (0.50 m storey height)		0.50 × 0.73	14.8	25	2616.110
b	5 steps (1.00 m storey height)		1.00 × 1.57	24.3	25	2616.105
c	8 steps (1.50 m storey height)		1.50 × 2.57	34.6	25	2616.101
d	Initial guardrail, 1 step, with U-section		1.16	9.7	40	2616.102
7	Guardrail T12 with child protection		0.45	10.4	25	2616.045
			0.73	14.1	25	2616.073
			1.09	17.8	25	2616.109
			1.29	19.4	25	2616.129
			1.40	20.6	25	2616.140
			1.57	22.7	25	2616.157
			2.07	27.7	25	2616.207
			2.57	32.7	25	2616.257
8	U-cover ledger 110 LW 0.11 m wide		0.73	5.2	200	2675.073
			1.09	7.6	50	2675.109
			1.29	8.9	50	2675.129
			1.40	9.7	50	2675.140
			1.57	10.8	50	2675.157
			2.07	14.2	50	2675.207
			2.57	17.6	50	2675.257
9	O-cover ledger 110 LW 0.11 m wide		0.73	5.2	200	2675.074
			1.09	7.5	50	2675.110
			1.29	9.0	50	2675.130
			1.40	9.4	50	2675.141
			1.57	11.0	50	2675.158
			2.07	14.1	50	2675.208
			2.57	18.1	50	2675.258
10	U-transition deck 154 with claws	6	1.09	5.0	50	3868.109
		6	1.29	6.0	50	3868.129
		6	1.40	6.5	50	3868.140
		6	1.57	7.3	50	3868.157
		6	2.07	9.7	50	3868.207
11	Guardrail fixing device			0.8	25	2636.000

System handrail, Step cover

Stairtowers, wheelchair ramps or bridges open to the public must, to conform to German state building regulations, be provided with continuous handrails. With the system handrail, complex one-off designs and assembly work can be avoided. With just three parts – handrail holder, joint and handrail tube – the guardrail can be installed quickly and easily in line with regulations for every stair type. The lightweight aluminium handrail tubes of $d=42.3$ mm for a comfortable grip are easy to cut and drill holes into, and also quick to clean. They are simply riveted to the fitted handrail holders.



With rotating joints that permit any angle between 90° and 180° to be set and used, all transitions between the handrail tubes are smooth and pleasant to the touch.

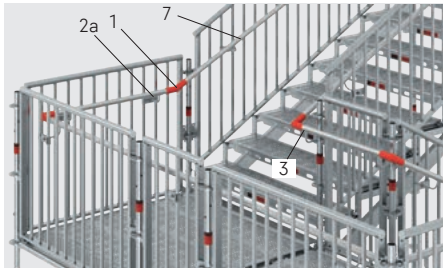

For information about the assembly, see the instructions for assembly and use for the system handrail.

Sure footing with Layher step covers. With their non-slip surface using quartz sand, they ensure maximum safety on Layher stairways in rain, snow and ice conditions. The step covers are made from glass-fibre-reinforced plastic. They are permanently resistant to weather effects, easy to clean, electrically non-conductive and flame-retardant. They can be fitted quickly and are optimally matched to the Layher stairway range.

A dependable solution for safe footing in all weather conditions. The risers and the step covers correspond to the non-slip value R13 according to DIN EN 51130.

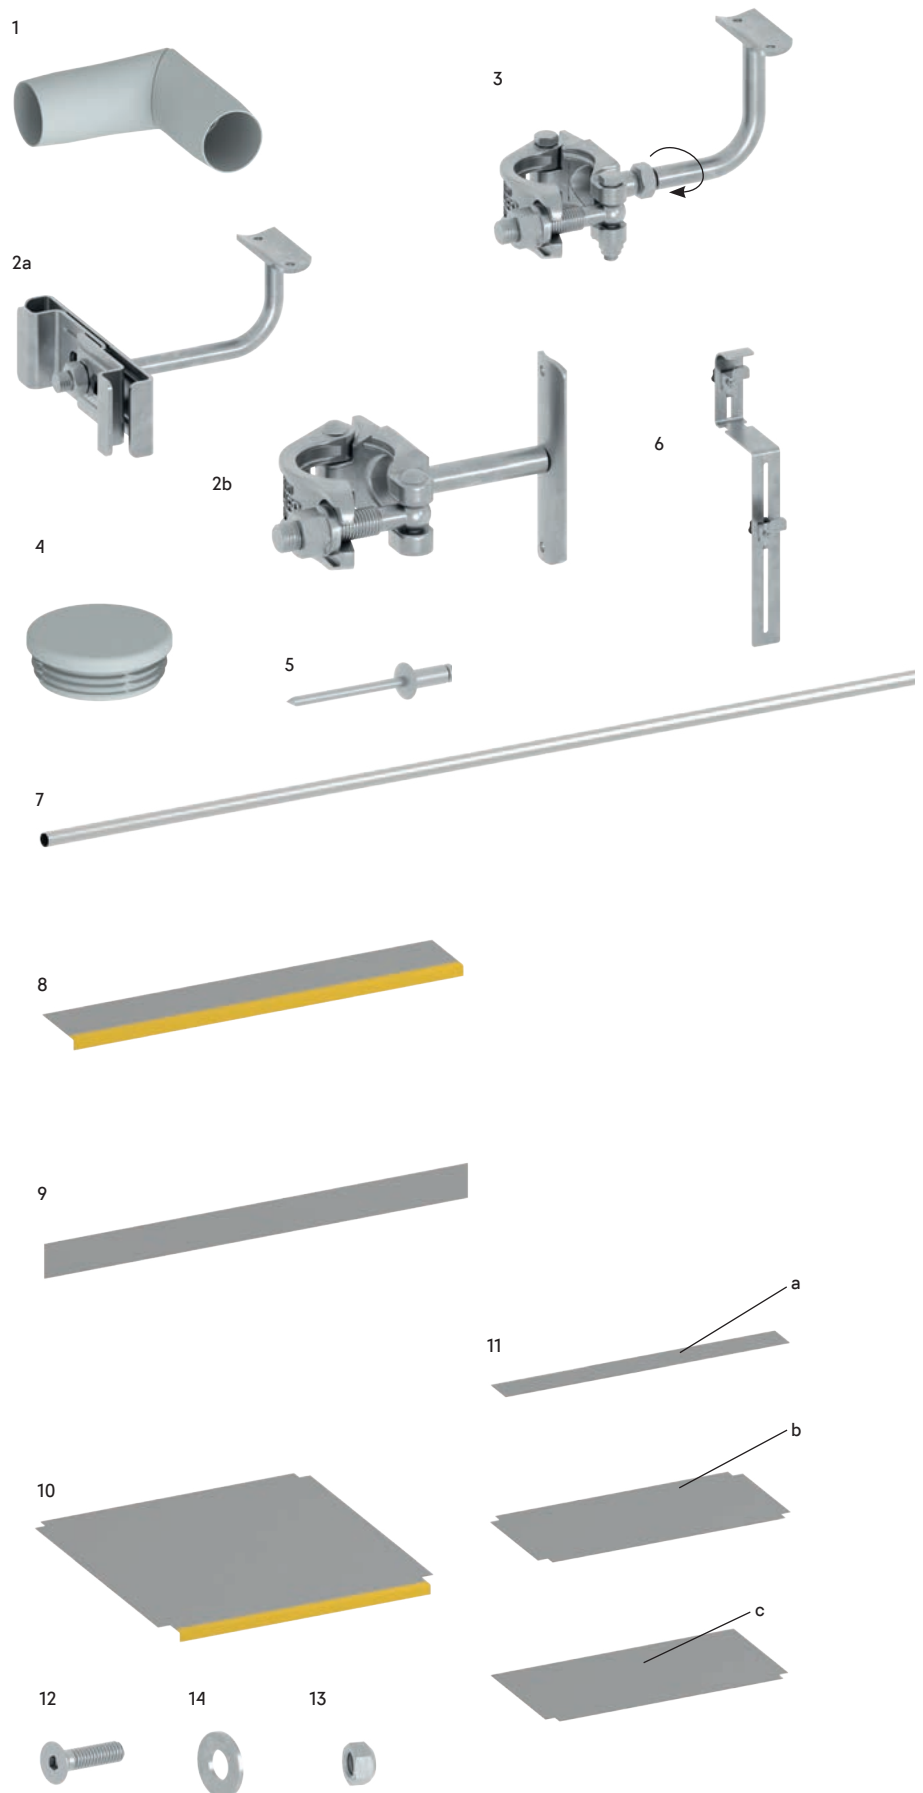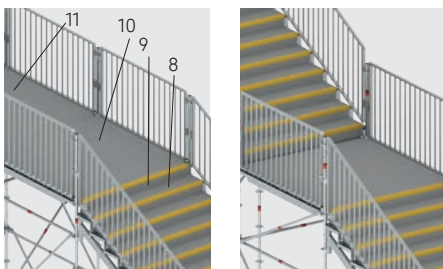


Pos.	Description	WS [mm]	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Joint for system handrail infinitely adjustable from 90 to 180°			1.0	10	2616.007
2	System handrail holder					
a	for child proof guardrail	19		0.7	20	2616.001
b	with half-coupler, vertical	19		0.9	20	2616.004
3	System handrail holder, rotating with half-coupler	19		1.0	20	2616.008
4	End cap for system handrail tube Plastic			0.1	10	2616.009
5	Blind rivet 4.8 x 12 mm for fastening the handrail tubes to the handrail holder			0.5	100	6493.357
6	Assembly aid for system handrail			1.2	1	2616.005
7	System handrail tube, aluminium, d=42.3 mm, 6.00 m			4.3	122	2616.003
8	Step cover necessary fixation material: each 3 pcs. (of PU 50 pcs.) 6495.069, 6494.580 and 6495.070		1.57 × 0.33 2.07 × 0.33	8.7 11.5	20 20	4000.157 4000.207
9	Riser necessary fixation material: each 2 pcs. (of PU 50 pcs.) 6495.069, 6494.580 and 6495.070		1.57 × 0.16 2.07 × 0.16	2.0 2.5	20 20	4001.157 4001.207
10	Landing cover with nose with nose, for adjacent stair, necessary fixation material: each 21 pcs. (of PU 50 pcs.) 6495.069, 6494.580 and 6495.070		1.57 × 1.57 2.07 × 2.07	15.3 26.6	20 20	4002.157 4002.207
11	Landing cover, flat					
a	flat, for use in intermediate bay, necessary fixation material: each 4 pcs. (of PU 50 pcs.) 6495.069, 6494.580 and 6495.070		1.57 × 0.15 2.07 × 0.15	1.5 2.0	20 20	4003.015 4003.016
b	flat, for use in intermediate bay, necessary fixation material: each 6 pcs. (of PU 50 pcs.) 6495.069, 6494.580 and 6495.070		1.57 × 0.73 2.07 × 0.73	7.1 9.4	20 20	4003.073 4003.074
c	flat, for use on platforms, necessary fixation material: each 18 pcs. (of PU 50 pcs.) 6495.069, 6494.580 and 6495.070		1.57 × 1.57 2.07 × 2.07	17.8 26.6	20 20	4003.157 4003.207
12	Countersunk bolt M8 x 30 mm	5		0.6	50	6495.069
13	Locking nut M8			0.2	50	6494.580
14	Spring washer A 8.4 x 18 mm			0.3	50	6495.070

Allround modular stairway

Modular stairway at scaffolding



Modular stairway at Event stage

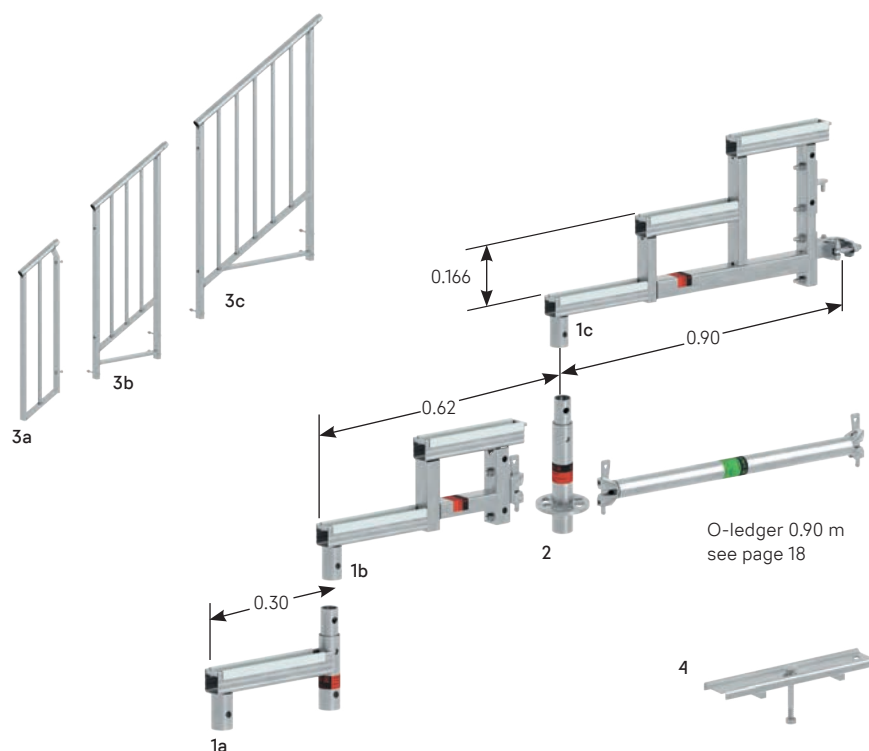

Pos.	Description	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Stringer for modular stairway				
a	1-step	0.30	2.4	50	5407.001 
b	2-step	0.60	5.5	50	5407.002 
c	3-step	0.90	8.0	20	5407.003 
2	Base collar 0.26 m for modular stairway with spigot	0.26	2.0	450	5407.021 
3	Guardrail for modular stairway				
a	1-step	0.30 x 1.10	6.5	40	5407.011 
b	2-step	0.60 x 1.10	14.0	25	5407.012 
c	3-step	0.90 x 1.10	16.0	25	5407.013 
4	Lift-off preventer with bolt	0.29	0.4	500	5407.030 


Lattice beams

The **U-lattice beam LW**, steel **1** and the **U-lattice beam**, aluminium **2**, with 4 wedge heads for locating on standards are used to construct birdcage scaffolding or in conjunction with the **spigot for U-lattice beam 5**, for further construction in the scaffolding standard dimension or for bridging.

O-lattice beam LW, with 4 wedge heads **3**, steel, is used for further construction in the scaffolding standard dimension. The top and bottom cylindrical tube chords are secured to the standard with the wedge heads.





U-ledger for lattice beam 4 for accommodating scaffolding decks for bridging with Allround lattice beams.

Applicable to lattice beams: when lattice beams are used, the stability of the scaffolding must be verified in each case. Loading tables available on request. The scaffolding deck must be secured against lifting off in each case with U-lift-off preventer.

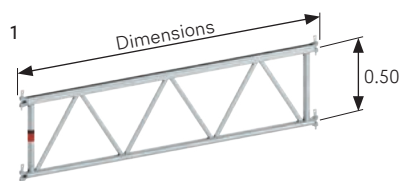


U-lattice beam deck configuration

2.07 m	6 x 0.32 m
2.57 m	7 x 0.32 m and 1 x 0.19 m
3.07 m	9 x 0.32 m
4.14 m	12 x 0.32 m and 1 x 0.19 m
5.14 m	15 x 0.32 m and 1 x 0.19 m
6.14 m	18 x 0.32 m and 1 x 0.19 m

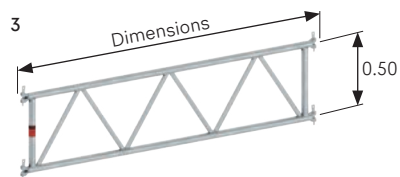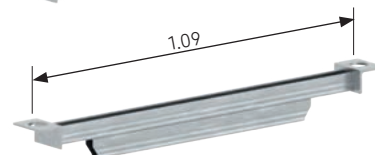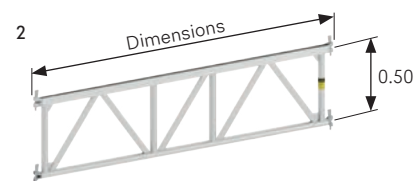

5a
Art.-Nr. 2656.000



5b
Art.-Nr. 2656.001



5c
Art.-Nr. 2656.002



Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	U-lattice beam LW with 4 wedge heads, steel		2.07 x 0.50	21.4	40	2673.207
			2.57 x 0.50	24.9	40	2673.257
			3.07 x 0.50	31.9	40	2673.307
			4.14 x 0.50	40.0	40	2673.414
			5.14 x 0.50	51.2	40	2673.514
			6.14 x 0.50	60.5	40	2673.614
2	U-lattice girder with 4 wedge heads, aluminium		1.57 x 0.50	8.6	50	3206.157
			2.07 x 0.50	12.3	50	3206.207
			2.57 x 0.50	15.2	50	3206.257
			3.07 x 0.50	17.0	50	3206.307
			4.14 x 0.50	24.6	50	3206.414
			5.14 x 0.50	30.2	50	3206.514
3	O-lattice beam LW with 4 wedge heads, steel		2.07 x 0.50	22.2	40	2674.207
			2.57 x 0.50	25.5	40	2674.257
			3.07 x 0.50	30.9	40	2674.307
			4.14 x 0.50	40.2	40	2674.414
			5.14 x 0.50	51.2	40	2674.514
			6.14 x 0.50	59.2	40	2674.614
4	U-ledger for lattice beam only in conjunction with Ref. No. 2656.000		0.73	3.1	42	4923.073
			1.09	7.8	42	4923.109
5	Spigot for U-section					
	a only for uses without lift-off preventer, incl. 2 bolts			1.8	250	2656.000
	b Use with and w/o lift-off preventer, for lattice girder incl. 2 bolts.			2.1	250	2656.001
	c also for U-bridging ledger			2.1	180	2656.002
6	Spigot for O-section with half-coupler, for lattice beam and ledger	19	0.30	1.8	25	4706.019
		22	0.30	1.8	25	4706.022



Allround FW System

The Allround FW System to provide wide-span bridging too, or to support heavier loads, This additional Allround component is a modular designed lattice beam of high load-bearing capacity that can be completely integrated into the Allround construction kit thanks to the standardised system dimensions. For lattice structures, only three essential supplementary components are needed, and they can be rapidly connected using pins: a **post 2**, a sturdy **chord 1** as the top and bottom chord, and a length-adjustable **diagonal rod consisting of 4/6**. A contribution to the high load-bearing capacity of the new product is made on the one hand by the use of efficient steel grades and the design height of the Allround FW System, and on the other hand by its installation in the Allround system standard dimension. This ensures a structurally advantageous and central force transmission – an offset is prevented.

A further special feature is the stepless adjustment of the diagonal rods using a **turnbuckle 4a** – for example to build slightly higher structures. This compensates for unwelcome sagging. A crossed diagonal configuration is also possible for transmitting both positive and negative lateral forces.

The modular design of the Allround FW System not only permits flexible heights, widths and lengths for optimum adjustment to load and geometry requirements, but also ensures economical transport and assembly thanks to bolt-free connection technologies and the low weight of the handy individual components, which is 19 kilograms maximum. If no crane is available at the site, the Allround FW System can be assembled manually without any problem – also in cantilevered construction from a secured level.

The **lock nut 9** is used to prevent the diagonal rod from twisting during the clamping process.

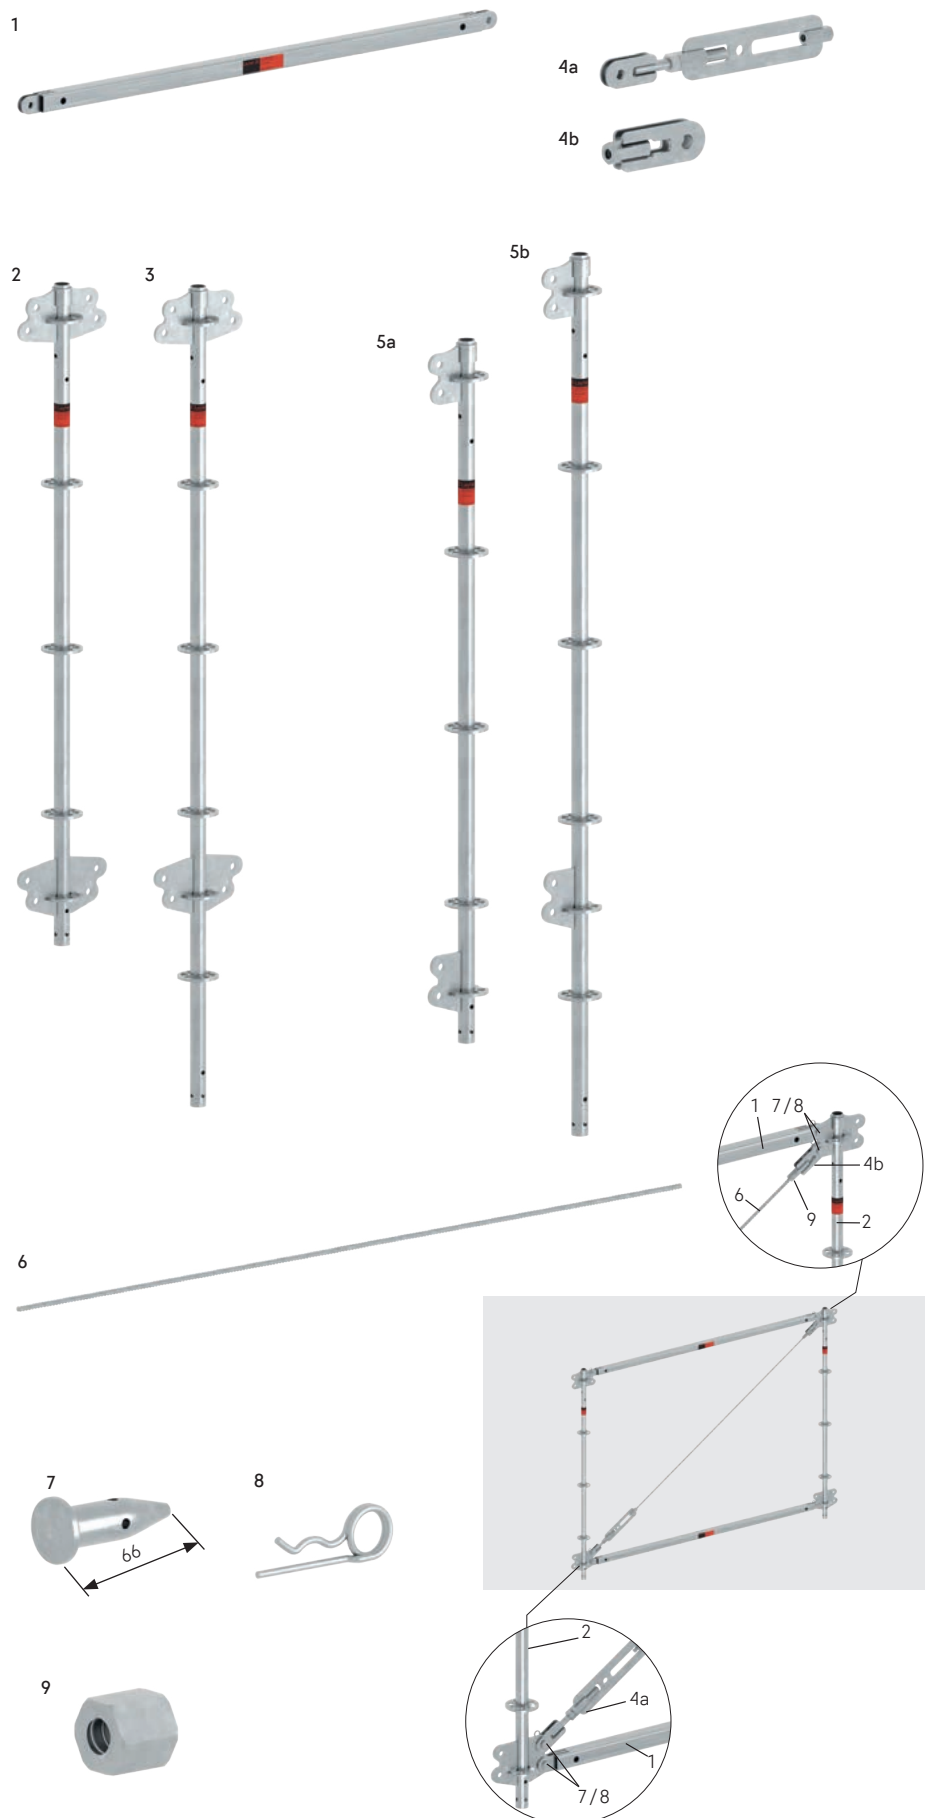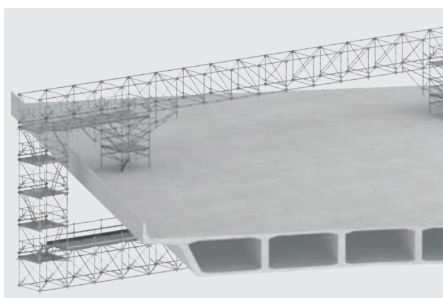


The FW System double guardrail **11** has swivelling wedge heads to position it off-axis due to the diagonal bars. The FW System guardrail adapter **10** is used for the application of child-safe guardrails.



10



11

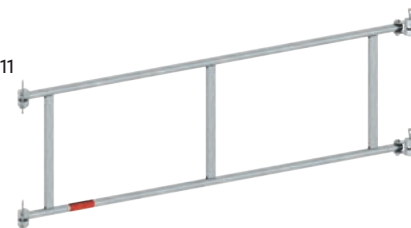


Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	FW chord		1.57	10.5	20	2646.157
			2.07	13.9	20	2646.207
			2.57	17.4	20	2646.257
2	FW post		1.00	12.6	28	2646.100
			1.50	15.4	28	2646.150
			2.00	17.2	28	2646.200
3	FW post, extended for accessible bridgings		2.50	19.9	28	2646.250
4	FW endfitting					
a	with turnbuckle			3.8	250	2646.202
b	w/o turnbuckle			1.0	500	2646.203
5	FW post, single-side-connection for connection to the Allround Scaffolding in longitudinal direction		1.00	9.5	28	2646.105
			1.50	12.3	28	2646.155
			2.00	14.6	28	2646.205
			2.50	17.3	28	2646.255
6	FW diagonal rod					
			2.37	3.3	100	2646.210
			1.96	2.8	100	2646.211
			2.07	2.9	100	2646.213
			1.63	2.4	100	2646.214
			1.23	1.9	100	2646.215
			1.40	2.1	100	2646.216
7	Bolt 20 x 66 mm			2.0	10	2646.221
8	Securing pin d=4 mm			1.5	50	5905.002
9	Nut 30 x 15 mm	30		1.0	10	2646.231
10	FW guardrail adapter for mounting of child proof guardrails			1.2	300	2646.001
11	FW double guardrail with swivelling wedge heads		1.57	9.2	30	2647.157
			2.07	11.9	30	2647.207
			2.57	13.6	30	2647.257

Bridging system

The **Allround bridging system** is the ideal complement to Layher Allround equipment. With just a few additional components, the load-bearing capacity of the proven Allround system can be increased enough to create, for example, wide-span footbridges or support structures for heavy loads. The bridging system is available in the familiar Layher dimensions of 2.07 m and 2.57 m, with its unique wedge head connection making it fully compatible with Layher Allround equipment. Simple bolt connections enable the components of the bridging system to be connected up, resulting in quick and easy assembly.

When used as a support beam for a scaffolding structure, podium or roof structure, the Allround bridging system is connected to the structure above it by using Allround standards integrated into the top. Using the wedge heads welded onto the sides, even suspended scaffolding structures can be connected, or several bridging units can be connected next to one another for a further increase in the load bearing capacity.

When a footbridge is built, the Allround bridging system is connected to Allround standards using the wedge heads provided on the sides of the posts. Depending on application, either Event decks or steel decks can be used. The bridge can also be clad using Layher Protect cassettes and roofed. The bridge is mounted on Layher heavy-duty columns with specially designed support elements. These support elements permit pre-assembly on the ground and subsequent insertion by crane, which is a major advantage when spanning bridges across roads.

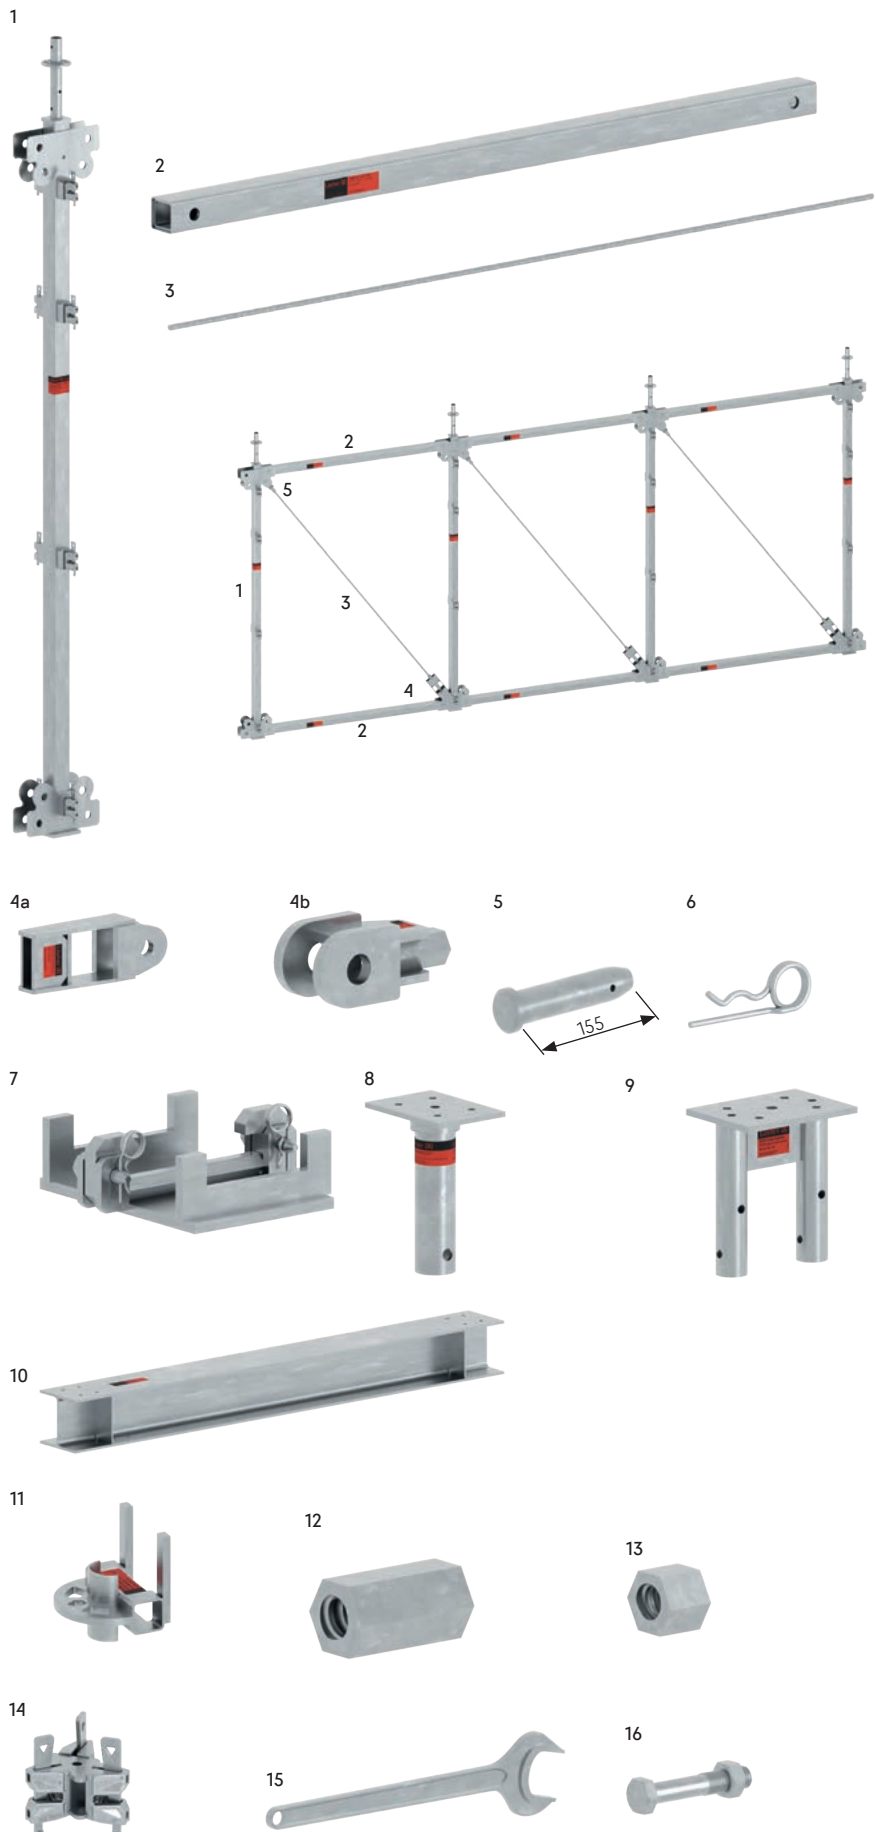

Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Bridging system post		3.22	57.3	18	2671.000 
2	Bridging system chord					
	for 2.07 m bay length		1.97	20.8	45	2671.010 
	for 2.57 m bay length		2.47	25.8	45	2671.020 
3	Bridging system diagonal rod					
	for 2.07 m bay length		3.05	7.9	75	2671.030 
	for 2.57 m bay length		3.37	8.7	75	2671.040 
4	Bridging system diagonal anchoring					
a	without nut			5.5	300	2671.050 
b	with nut	36		2.9	300	2671.060 
5	Bolt 30 x 155 mm			8.0	10 	2671.072 
6	Securing pin d=4 mm			1.5	50 	5905.002 
7	Bridging system support element			4.8	80	2671.080 
8	Bridging system adapter for heavy-duty column			5.5	124	2671.090 
9	Bridging system support for double standard			4.9	50	2671.140 
10	Bridging system support beam					
	for bridge width 1.57 m			119.2	4	2671.095 
	for bridge width 2.07 m			145.8	4	2671.100 
	for bridge width 2.57 m			167.0	4	2671.105 
11	Protect holder			1.0	250	2671.110 
12	Clamping nut for diagonal rod, WS 36 x 70, galvanised	36		4.0	10 	2671.122 
13	Locking nut for diagonal rod, WS 36 x 30, galvanised	36		4.0	20 	2671.132 
14	Wedge-head coupler triple			2.3	250	2671.150 
15	Open ended wrench WS 36	36		0.5	1	2671.135 
16	Hexagon head bolt M12 x 35 mm with nut	19		5.0	50 	2671.162 

Aluminium FlexBeam

Rapid assembly and optimum use of materials ensure economical scaffolding structures. The **aluminium FlexBeam 1** makes it possible. It enables surface scaffolding to be efficiently assembled both suspended and upright.

Compared with the steel lattice beam 450:

- The **bending load capacity is up to 2.5 times higher**, meaning that larger support and suspension configurations are possible.
- The structural height with just **280 mm (U-FlexBeam) or 290 mm (O-FlexBeam)** is **about 40% lower**, resulting in lower construction heights and thus expanded possibilities for use.
- As a rule **no compression chord bracing** is required.
- A channel-shaped upper side of the section is provided for **direct suspension of U- or O-system decks** which are also secured in position by the use of a new and easy-to-fit lift-off preventer.




The aluminium FlexBeam is also available as **O-version 3**. This is designed for supporting O-shaped scaffolding decks and for use as a rail for mobile scaffolding structures or mobile weather protection roofs.

Further expansion using standard Allround components is also possible. In the case of use as suspended scaffolding the **anchor plate 9** and the **suspension shoe 10** are available for receiving the beam. The **anchor plate 9** is intended for direct wall-plug connection to the structure.

The **suspension shoe 10** can be directly connected to the **tie rod adapter 12**. Optionally the suspension can be extended in length by Allround standards using the **standard adapter male/female 13/14**. The tie rod adapter is used for connection to a tie rod firmly anchored in the structure and suitable for this purpose.

To extend the length of beams the **FlexBeam spigot 7** is available, which is inserted into the hollow chamber of the beam section and then pinned to the beam.

The **suspension shoe for standard 11** extends the application possibilities of the FlexBeam and can be used for elevated scaffolding constructions and for arched step scaffolding.

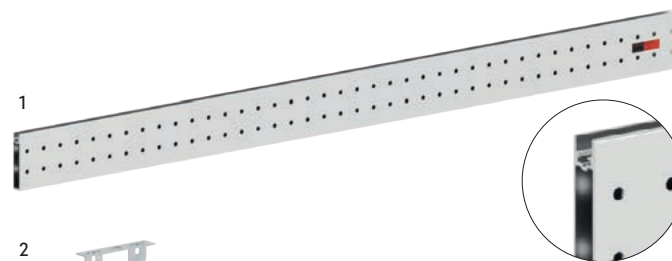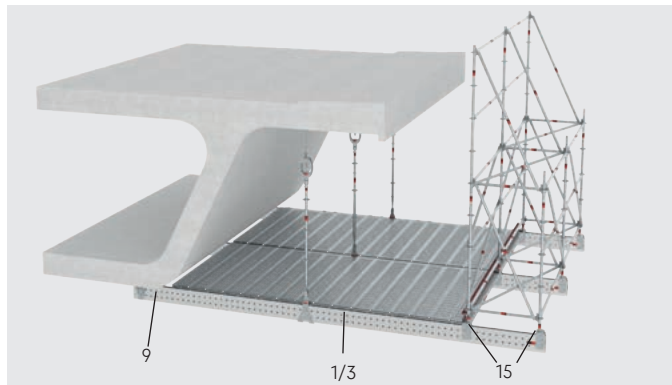


Learn more on YouTube
Aluminium FlexBeam

Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Aluminium U-beam FlexBeam		3.00	30.0	12	2657.300 
			4.00	40.0	12	2657.400 
			5.00	50.0	12	2657.500 
			6.00	60.0	12	2657.600 
			7.00	70.0	12	2657.700 
2	FlexBeam U-lift-off preventer		0.26	0.7	250	2657.026 
			0.76	2.2	150	2657.076 
			1.00	3.3	50	2657.100 
3	Aluminium O-beam FlexBeam		3.00	30.6	12	2657.301 
			4.00	40.8	12	2657.401 
			5.00	51.0	12	2657.501 
			6.00	61.2	12	2657.601 
			7.00	71.4	12	2657.701 
4	FlexBeam O-lift-off preventer		0.61	1.1	225	2657.061 
			0.92	1.8	225	2657.092 
5	FlexBeam U-lift-off preventer lock for U-FlexBeam			10.0	50 	2657.111 
6	FlexBeam lift-off preventer bolt for U- and O-FlexBeam	19		2.0	20 	2657.121 
7	FlexBeam spigot for stiff connections of FlexBeams aluminium U-beam		0.80	16.4	50	2657.010 
8	FlexBeam anchor plate tube			1.3	200	2657.020 
9	FlexBeam anchor plate			12.0	50	2657.030 
10	FlexBeam suspension shoe vertical bearer for the FlexBeam			9.3	50	2657.040 
11	FlexBeam suspension shoe for standard vertical bearer for the FlexBeam			13.0	15	2657.045 
12	FlexBeam tie rod adapter as connection between Allround standards (w/ o spigot) to the diagonal rod			5.7	100	2657.050 
13	FlexBeam standard adapter male for further construction with Allround standards (w / o spigot)			1.7	300	2657.060 
14	FlexBeam standard adapter female for connection between Allround standard and suspension shoe			2.9	250	2657.070 
15	FlexBeam standard connector for protective wall structures			6.6	100	2657.080 

Allround Scaffolding

The **timber beam support 1** for U-FlexBeam permits lateral fitting of an extra beam, for example to act as a basis for providing fitted bays in curved sections.

The **cross-connector 8** allows FlexBeams, positioned one above the other and at right angles, to be turned into a grid structure. Special structures produced specifically for projects – e.g. welded steel structures – can simply be replaced by them, not only resulting in economic benefits but also saving on raw material resources.

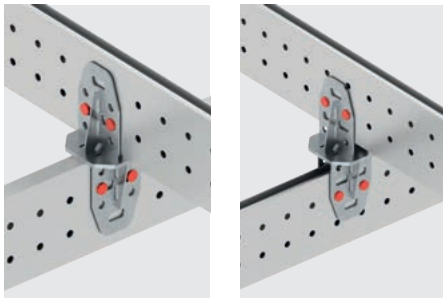


Securing positions of beams

Suspended beams

Using existing Allround system components to provide side protection on the FlexBeam permits economical system solutions without the need for costly improvisation. Where necessary the **guardrail adapter 9** can also be used as a connecting piece for elevated scaffolding – only for use with U-FlexBeam.



The **length adapter 10** has a horizontal adjustment range of 148 mm and allows the metric hole pattern of the FlexBeam aluminium beam to be adapted with the Layher system dimensions.

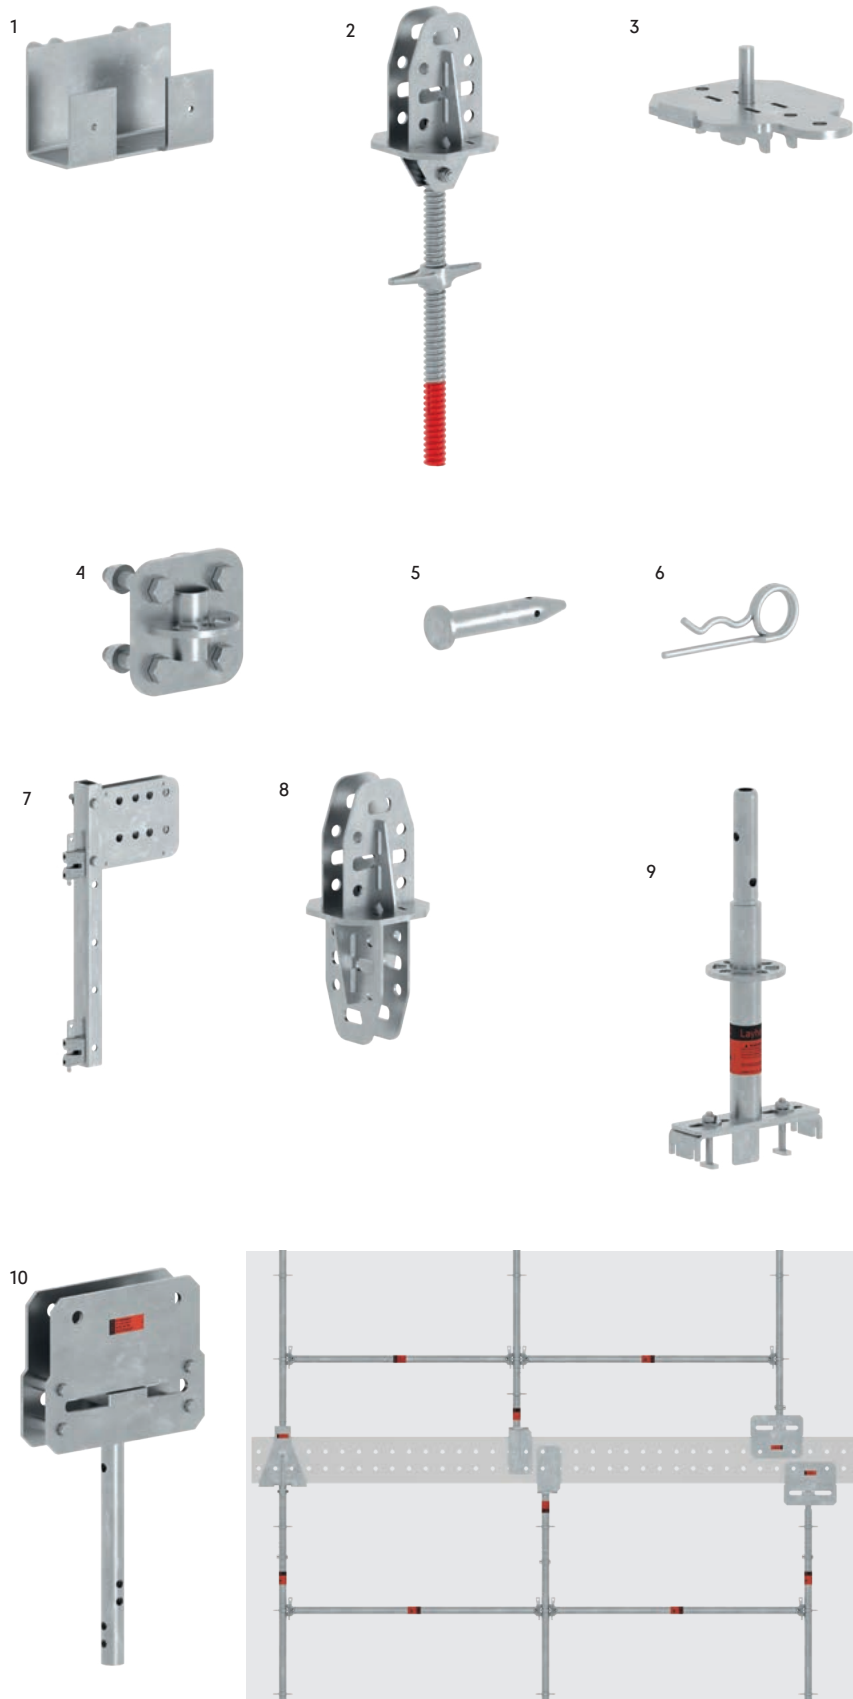

The **clamping plate 11/12** – available in 2 different sizes – can be used as an anchorage device for under-bridge scaffolding or other suspended scaffolding structures on steel beams.



Pos.	Description	WS [mm]	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	FlexBeam timber beam support use for e.g. trapeziform adjustment bays, for U-FlexBeam			3.4	150	2657.090
2	FlexBeam head jack 60, swivelling			11.2	50	2657.160
3	Base plate support for U-FlexBeam			1.8	100	2657.150
4	FlexBeam rosette adapter for the lateral connection of Allround O-ledgers and horizontal diagonal braces to the beam, including 4 bolts and nuts	30		4.4	150	2657.130
5	Bolt d=20 x 113 mm			3.0	10	2646.281
6	Securing pin d=4 mm			1.5	50	5905.002
7	FlexBeam end bracket adapter for connection to an Allround standard in system level at beam end	24		11.8	20	2657.015
8	FlexBeam cross-connector			10.4	30	2657.140
9	FlexBeam guardrail adapter for U-FlexBeam	19		3.8	72	2657.085
10	FlexBeam length adapter			12.6	30	2657.180
11	Clamping plate 70 to 210 mm perm. load 59.5 kN, drill d=21 mm, flange width 5 to 26 mm		0.29 × 0.26	12.5	50	4015.210
12	Clamping plate 190 to 330 mm perm. load 59.5 kN, drill d=21 mm, flange width 5 to 46 mm		0.30 × 0.26	21.7	25	4015.211

Allround Scaffolding

Using the cantilever method for the FlexBeam aluminium U-beam, U-FlexBeams can be used to assemble surface scaffolding underneath a bridge – incrementally, quickly, without improvisation and more safely too. To do so, only three components are needed as tools – the roller unit, the receiving bracket and the fitting retainer.

The **castor unit 1** is used for moving the beam. The FlexBeam aluminium U-beam is placed onto the **support bracket 2**, and the **assembly support 3** secures the positioned beam. The basis for the cantilevered structure is formed by an already suspended scaffolding.

Step 1: Fit the receiving bracket to the front-most FlexBeam. Then fasten the front and rear roller units of the longitudinal beams to the already assembled U-FlexBeams with a spacing appropriate for high structural strength. After that, insert the longitudinal beams into the roller unit.

Step 2: Place the transverse U-FlexBeams, with pre-fitted suspension shoes, onto the receiving brackets and secure them. Opposite the receiving bracket, hook in the fitting retainer and connect it to the receiving bracket by means of a double wedge head coupler. The wedges are only inserted here, not hammered in.









Step 3: Fit the roller unit to the transverse beam positioned at the front. Push out the longitudinal beams a very short way and secure them with pins as stops.

Step 4: Push the longitudinally extending U-FlexBeam one bay forwards. The beam is also secured at the rear with a pin as the stop.

Step 5: Undo the double wedge head coupler, remove the fitting retainer and push the transverse beam section one bay in the construction direction using decks.

Step 6: Lay out decks and fit the suspension parts.

Assembly steps

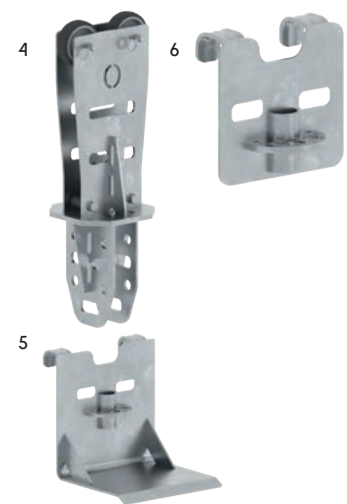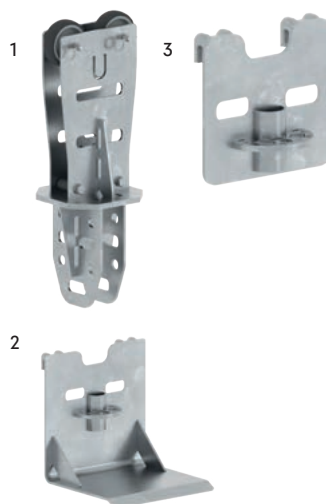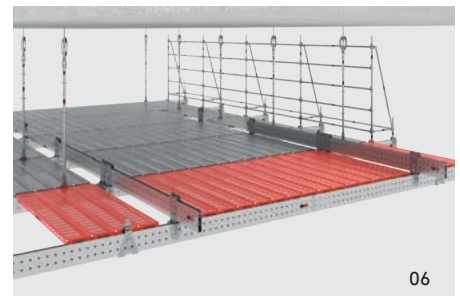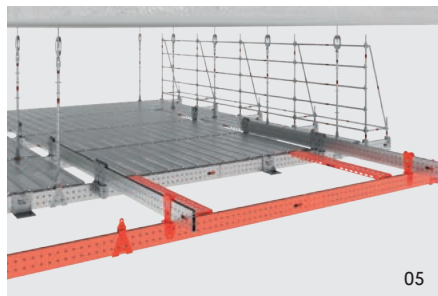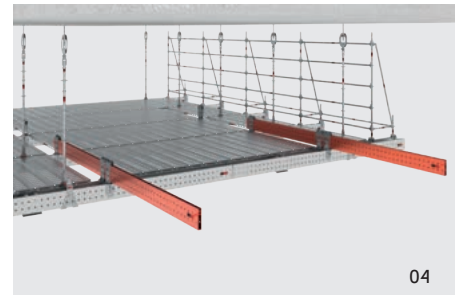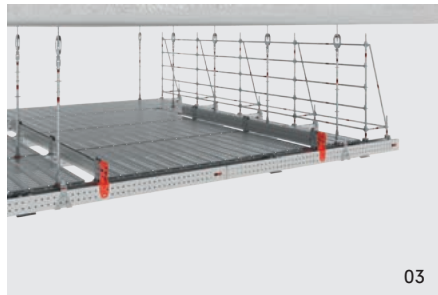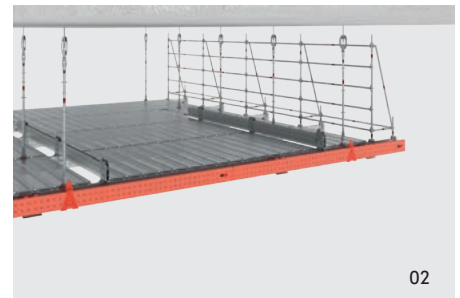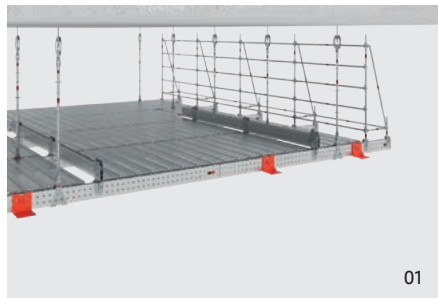

Pos.	Description	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Castor unit for U-FlexBeam for cantilevered construction	13.4	25	2657.190
2	Support bracket for U-FlexBeam for cantilevered construction	10.0	50	2657.191
3	Assembly support for U-FlexBeam for cantilevered construction	3.4	250	2657.192
4	Castor unit for O-FlexBeam for cantilevered construction	14.3	30	2657.200
5	Support bracket for O-FlexBeam for cantilevered construction	10.0	100	2657.201
6	Assembly support for O-FlexBeam for cantilevered construction	3.4	250	2657.202


Allround Wall Bracket

A wall bracket is used in scaffolding construction to support scaffolding on the facade. The conventional and previously known brackets are steelwork-based designs made from, for example, I-sections which are heavy and awkward to handle. This greatly hinders assembly.

The new Allround wall bracket – consisting of the **wall connection unit 1** and **pressure support 2** – is by contrast lightweight, small and handy. That makes it ideal for quick attachment to the facade. In combination with the components from the Allround construction kit, they enable a wide range of possible configurations to be created. Building of the facade scaffolding can continue using both Allround components and the modular access system AGS for facades.

If one or more wall brackets cannot be arranged on the wall in the axis dimension of the scaffolding structure (e.g. in the case of window openings), or to further reduce the assembly effort, the Aluminium FlexBeam can be used to absorb the loads.

The transition between the wall bracket and the Aluminium FlexBeam is created with a **FlexBeam crosspiece 3** and the cross-connector (see page 56).

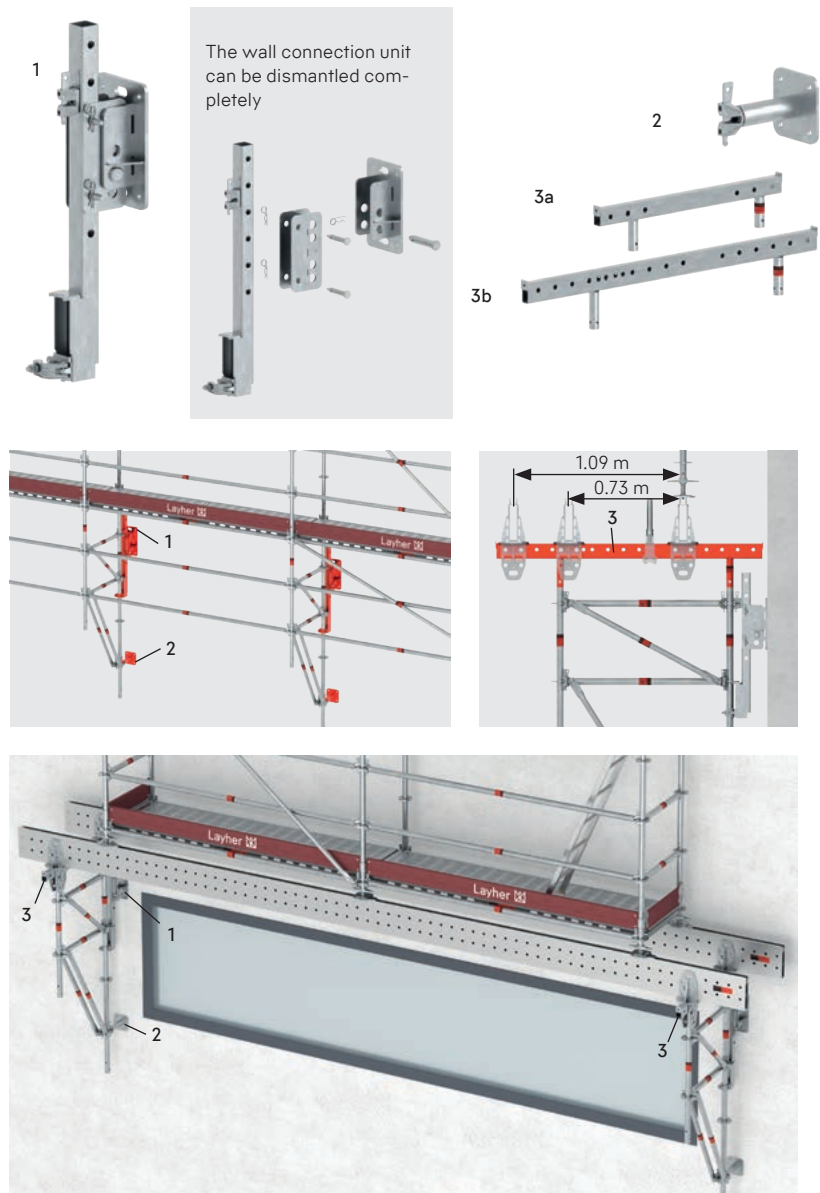

Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Allround wall connection unit	19		25.8	40	2632.500
2	Allround pressure support			2.4	100	2632.501
3 a	FlexBeam crosspiece		0.73	7.1	50	2657.073
b			1.09	22.7	50	2657.109



Aluminium TwixBeam

The high-strength, multifunctional **aluminium TwixBeam 1** from Layher – consisting of two bolted aluminium U-sections with a height of 200 mm – has a wide range of possible uses, both in shoring construction and in scaffolding construction. The Twix-Beam is available in lengths from 0.80 m to 6.60 m. The beam is characterised by high load-bearing capacity yet low weight. The bolted structure permits dismantling of the beam for different applications.


	TwixBeam	Beam connector
Height [mm]	200	140
Width [mm]	160	50
Weight [kg/m] completely assembled	ca. 13.0	ca. 7.0
Bending stiffness EI [kNm ²] gross	1.760	440
Bending moment M_{Rd} [kNm]	57.1	22,2
Shear force V_{Rd} [kN]	226	138

The articulated TwixBeam spindle 60 **4** is inserted into the 52 mm-wide intermediate area of the beam and pinned in place. It can be used as a head jack or base plate. Standard or suspended structures can be built by passing through an Allround standard or the swivelling spindle. The spindle strut (patent pending) permits stiffening or bracing of various structures – it can transmit tensile and compressive forces. Beam connector and **insertion beam 7** complete the system for flexible adaptability to all site conditions and contours.

For grid structures, the TwixBeam can be placed above the other. The connection is made by beam clamps or the corner connector 4041.012.

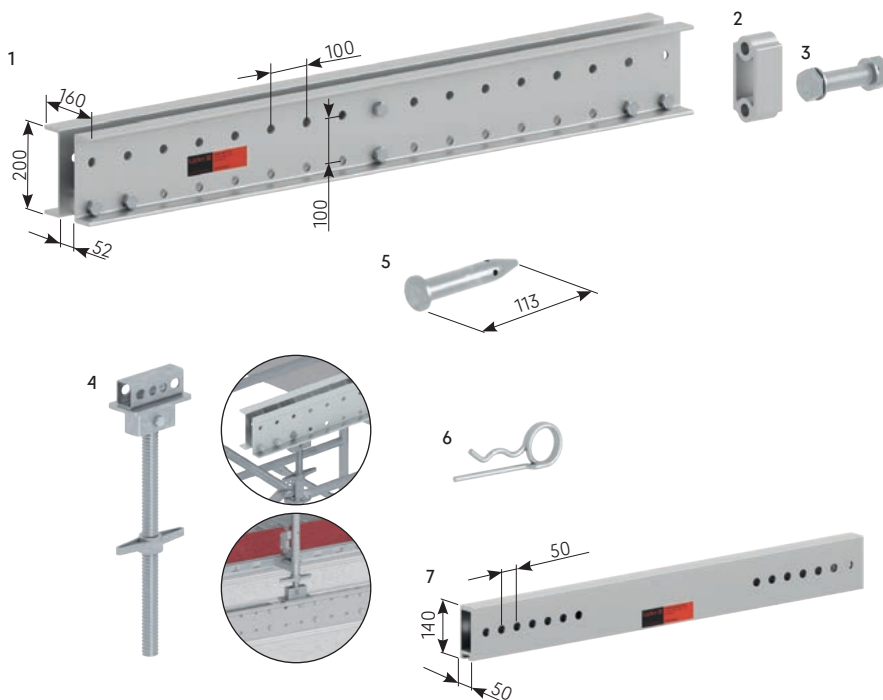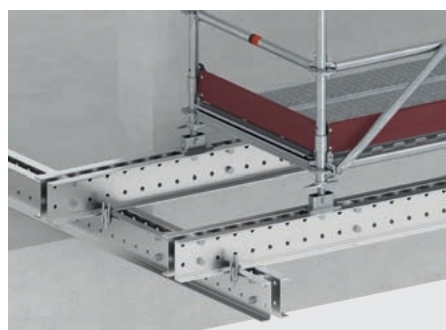

Application examples in scaffolding construction

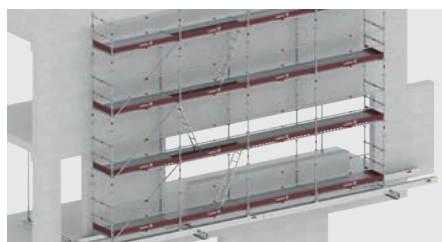

Standard structures

Standard bracket scaffolding – TwixBeam structure assembled as a grid




Suspended structures

Suspended bracket scaffolding – Twix-Beam structure assembled as a grid. Suspension made by through-passing standards.



Stairtower suspension

The slab cut-out can be bridged by using the Twix-Beam. The stairtower can be assembled suspended, from the top downwards.

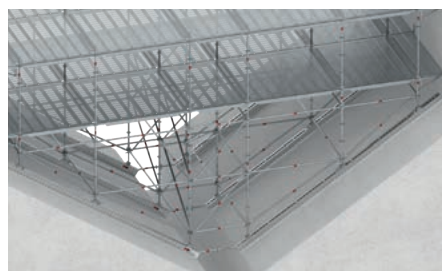

Further application examples

E.g. Beam structures for adjustment to funnel-like boiler




Wall bracket

Particularly strong wall bracket solution for supported scaffolding for material-saving construction.




Learn more on YouTube
Aluminium TwixBeam in scaffolding construction

To increase the loading capacity, the beams can also be mounted one above the other in the same direction. They are secured using beam clamps or by an offset arrangement of the spacer.

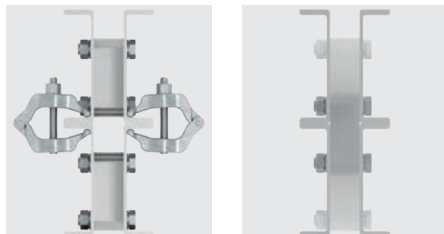


Application examples in shoring construction

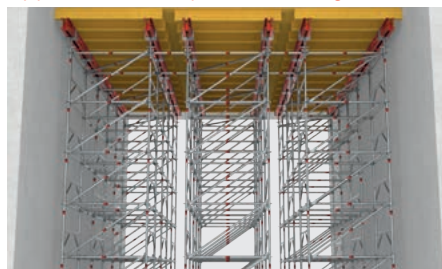

Main beam

Thanks to the high load capacity of the TwixBeam, the TG 60 can be used to the full and the weight advantage allows an easy striking.

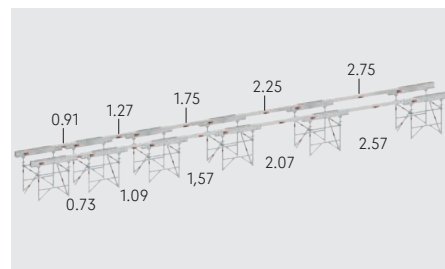

Use as continuous beam

With the aid of the insertion beam in the intermediate area of the aluminium TwixBeam, or by using the beam connector, main beams can also be constructed as genuine continuous beams.




Learn more on YouTube
Aluminium TwixBeam in
shoring construction



Adjustment to the wall construction

The insertion beam permits, thanks to varying extension lengths, easy adjustment of the edge areas.

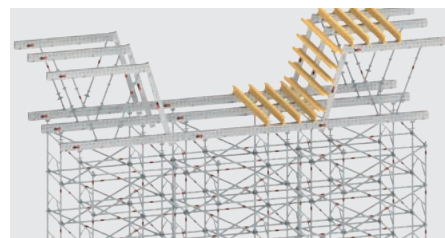



Further application examples

E.g. trussed-beam framework made of TwixBeam, insertion beam and TwixBeam struts – mounted on Shoring TG 60



Pos.	Description	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Aluminium TwixBeam completely assembled, with spacer, bolts and nuts	0.80	11.6	20	4041.080
		1.30	17.3	20	4041.130
		1.70	23.1	20	4041.170
		2.10	27.6	20	4041.210
		2.60	34.6	20	4041.260
		3.10	40.3	20	4041.310
		3.60	47.3	20	4041.360
		4.60	60.0	20	4041.460
		5.60	72.6	20	4041.560
		6.60	85.3	20	4041.660
2	TwixBeam Spacer		0.5	250	4041.000
3	Bolt M20 x 90 mm with nut and washer		3.8	10	4041.004
4	Articulated TwixBeam spindle 60 solid, for the head and bottom area, max. inclination angle 45°	0.60	8.2	100	4041.002
5	Bolt d=20 x 113 mm		3.0	10	2646.281
6	Securing pin d=4 mm		1.5	50	5905.002
7	TwixBeam insertion beam	0.49	3.4	30	4042.049
		0.91	6.3	30	4042.091
		1.27	8.9	30	4042.127
		1.75	12.4	30	4042.175
		2.25	15.9	30	4042.225
		2.75	19.5	30	4042.275

Allround Scaffolding

The **wall shoe for TwixBeam aluminium beam 4** allows the TwixBeam to be used directly on the wall. The tube at the front with the integrated cross hole allows a threaded spindle to be attached to support the TwixBeam beam or to suspend Allround Scaffolding standards. Upright scaffolding constructions are also possible by bolting in a tube connector.

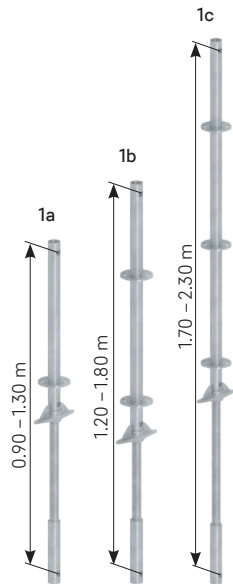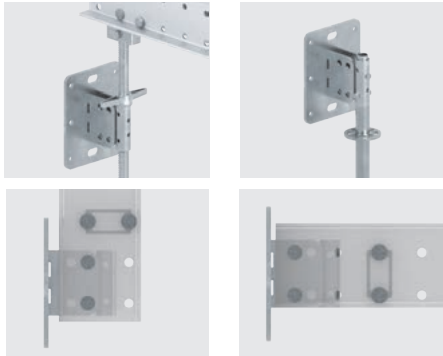



The **wall shoe for TwixBeam insertion beam 5** has connection options for either standards (blue), TwixBeam spindle struts (red) or for the insertion beam (green).

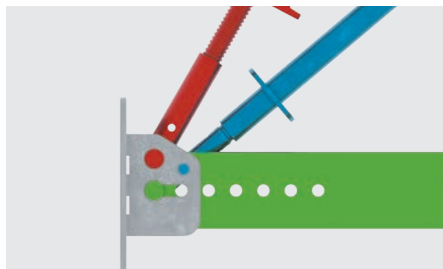

The **spindle and standard adapter 6** allows a spindle or an Allround Scaffolding standard to be attached.



The **TwixBeam Stopper 7** counteracts the downward force of the TwixBeam spindle on inclined constructions outside the hole pattern of the TwixBeam. The stopper is simply connected to the TwixBeam with bolts and pins.



The **TwixBeam H-20 beam clamp 8** and the **TwixBeam H-20 beam clamp for insertion beams 9** secure the H-20 wooden formwork beam.

The **TwixBeam corner connector 10** allows several TwixBeam supports to be connected at an angle. It is secured with bolts and locking pins.

10





The **TwixBeam cross-connector 11** allows two TwixBeam beams mounted on top of each other to be connected at any angle. The cross connector is inserted into the space between the two beams and secured with bolts or screws.

11



With the aid of the aluminium TwixBeam and the **single rail trolley 12**, small-sized suspended and movable maintenance platforms can be fitted for fast and economical maintenance work - allowing high-volume scaffolding to be dispensed with.




The single rail trolley is attached to the lower flange of the TwixBeam to do so. A special **connector 13** is available for suspension of the scaffolding. The attached rosette permits bracing using diagonal braces and ledgers. Standards can be inserted that are pull-resistant with bolts or hinged pins.

12



13

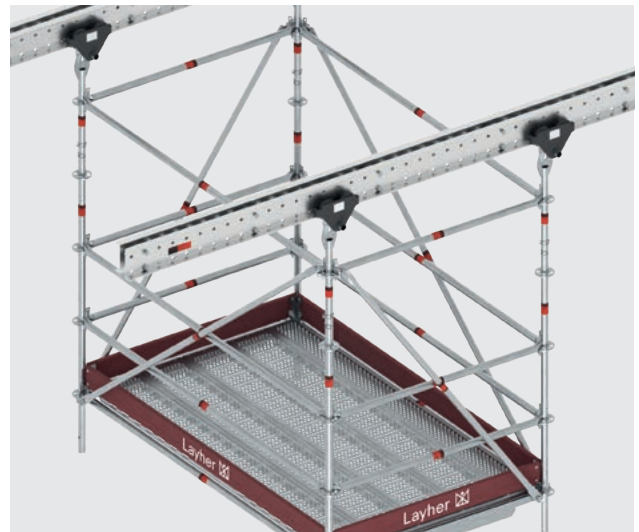

Technical data:

- Load-bearing capacity up to 2,000 kg
- Adjustment range 160–300 mm
- Flange thicknesses up to 40 mm
- Optimum running properties for different beam sections, such as the aluminium TwixBeam
- Prior and fine settings are made by turning the eyelet crosspiece
- Not authorised for passenger transport

Pos.	Description	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1 a	TwixBeam Spindle strut to transmit tensile and compressive forces	0.90 - 1.30	11.0	50	4043.130
b		1.20 - 1.80	15.3	50	4043.180
c		1.70 - 2.30	18.1	50	4043.230
2	TwixBeam beam connector	0.80	16.4	50	4041.001
3	TwixBeam standard connection	0.54	2.3	100	4041.003
4	Wall shoe for TwixBeam aluminium beam		10.3	50	4041.005
5	Wall shoe for TwixBeam aluminium insertion beam		10.5	50	4041.006
6	TwixBeam spindle and standard adapter		2.9	100	4041.007
7	TwixBeam Stopper		2.8	100	4041.008
8	TwixBeam H-20 beam clamp		0.8	250	4041.009
9	TwixBeam H-20 beam clamp for aluminium insertion beams		0.3	1000	4041.010
10	TwixBeam corner connector		2.8	150	4041.011
11	TwixBeam cross-connector		2.1	200	4041.012
12	Single Rail Trolley for mobile suspension on beam systems		19.3	50	4018.000
13	Connector to single rail trolley		4.1	100	4018.001


Shoring TG 60

The shoring TG 60 ensures a fast, flexible and safe assembly of shoring towers. The heart of the TG 60 are the **shoring frames TG 60 1** with integrated rosettes. All frames are symmetrical parts, thus the orientation of the diagonal braces can be varied. The Allround shoring TG 60 is able to bear up to 6 tons per standard.

The structural analysis of the Allround shoring TG 60 complies to DIN EN 12812. The adaptation to the dimension of the formwork beams can be easily made by using different Allround ledgers and diagonal braces from 1.09 m to 3.07 m (see figure "bay length adaptation").

Thanks to the perfect compatibility to Allround Scaffolding, the towers of the TG 60 can be adapted flexibly to any building condition. The shoring tower TG 60 can be assembled in horizontal position on the ground. Then the tower will be placed by crane. Otherwise it can be assembled in vertical position – optionally directly at the place of action or somewhere else, with placing it with its quickly mounted castors.


The Allround shoring TG 60 has an integrated advanced guardrail without any accessories for assembly in vertical position. For the Allround shoring TG 60, only solid base plates may be used.

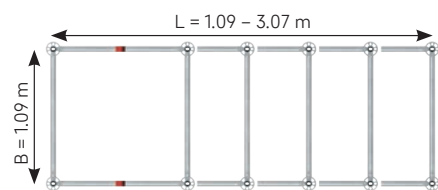


Bay length adaptation with Allround serial ledgers from 1.09 m to 3.07 m.




Learn more on YouTube
Allround Shoring TG 60

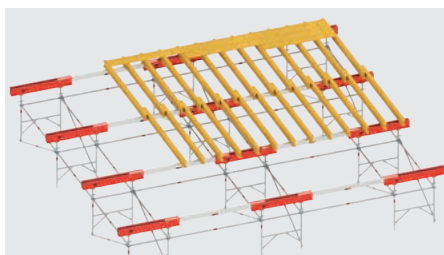

TwixBeam combined with Allround Shoring TG 60






Castor
see page 74




Combination variants

Tower variant 1
Base frame mounted
at tower head

Tower variant 2
Spacer frame mounted
at tower head

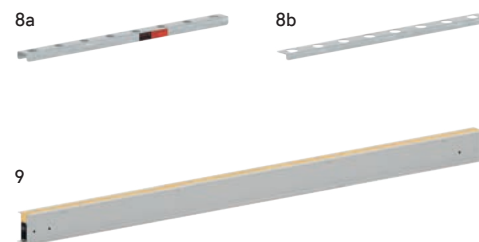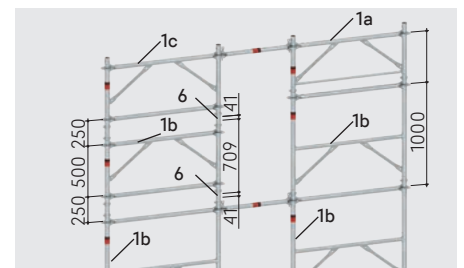

Load-capacity:
 $\alpha = 90 - 60^\circ$: 17.5 kN
 $\alpha = 60 - 45^\circ$: 11.2 kN
 $\alpha = 45 - 30^\circ$: 7.3 kN

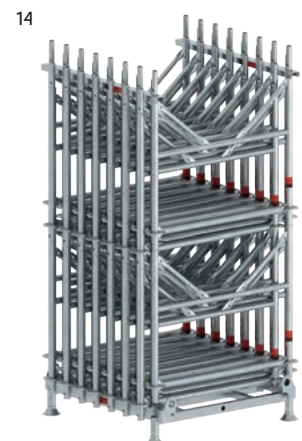


Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Shoring frame TG 60					
a	spacer frame, with spigot at the bottom, steel, hot-dip galvanised		0.50 × 1.09	13.0	21	2602.036 
b	standard frame, with spigot at the bottom, steel, hot-dip galvanised		1.00 × 1.09	17.7	21	2602.035 
c	base frame, without spigot, steel, hot-dip galvanised		0.71 × 1.09	15.9	21	2602.034 
2	Intermediate jack for height adjustment or inclined ceilings		0.80	8.3	100	2602.038 
3	Spindle support for placement by crane or by castors, steel, hot-dip galvanised			0.8	450	2602.033 
4	Castor adapter with 2 wedge heads			6.4	50	2602.040 
5	Shoring spigot for use of the initial frame as tower head, spigot is secured with 2 hinged pins			1.1	350	2602.032 
6	Shoring spacer with spigot for use of the base frame at the tower head, spigot is secured with 2 hinged pins. The spacer allows the combination of the shoring towers			1.3	250	2602.037 
7	Shoring frame pallet for use with 22 shoring frames each level, stackable, craneable, optimised for truck beds		1.20 × 1.10	53.7	10	5113.003 
8	Loading and stacking securing profile					
a	for use at the stack head with upwards pointing spigots		1.20	3.9	50	5113.004 
b	for use at the stacking head without upwards pointing spigots (e.g. for stacking of initial frames)		1.20	3.4	10	5113.005 
9	Aluminium section beam with wood					
	3.00 m long, with riveted-in wood section, with holes drilled for connection by means of beam connectors		3.00	18.0	48	4026.300 
	4.00 m long, with riveted-in wood section, with holes drilled for connection by means of beam connectors		4.00	24.0	48	4026.400 
10	Beam connector		1.20	6.6	100	4026.000 
11	Beam connector bolt M12 x 70 mm, with nut			0.7	10 	4026.003 
12	Fastening for crane transport			3.4	100	2630.000 
13	Adapter for ledger connection	19		1.0	500	4719.019 
14	Shoring TG 60 frame set					
	consisting of 88 shoring frames 2602.036 on frame pallet			1,205.5	1	2602.043 
	consisting of 44 shoring frames 2602.035 on frame pallet			840.3	1	2602.041 
	consisting of 22 shoring frames 2602.034 on frame pallet			410.3	1	2602.042 

Heavy-duty column / Heavy Duty Tower

An extremely high load-bearing capacity is achieved by combining four Allround standards. Specially developed top and base pieces, and heavy-duty spindles fitted into the latter, permit a multiplication of the individual load capacities of each standard.

These individual elements can then be expanded, with the aid of further Allround standard elements, into any spatial structures required.

A comprehensive type test TP-24-0005 is available for the heavy-duty support and the heavy-duty tower.


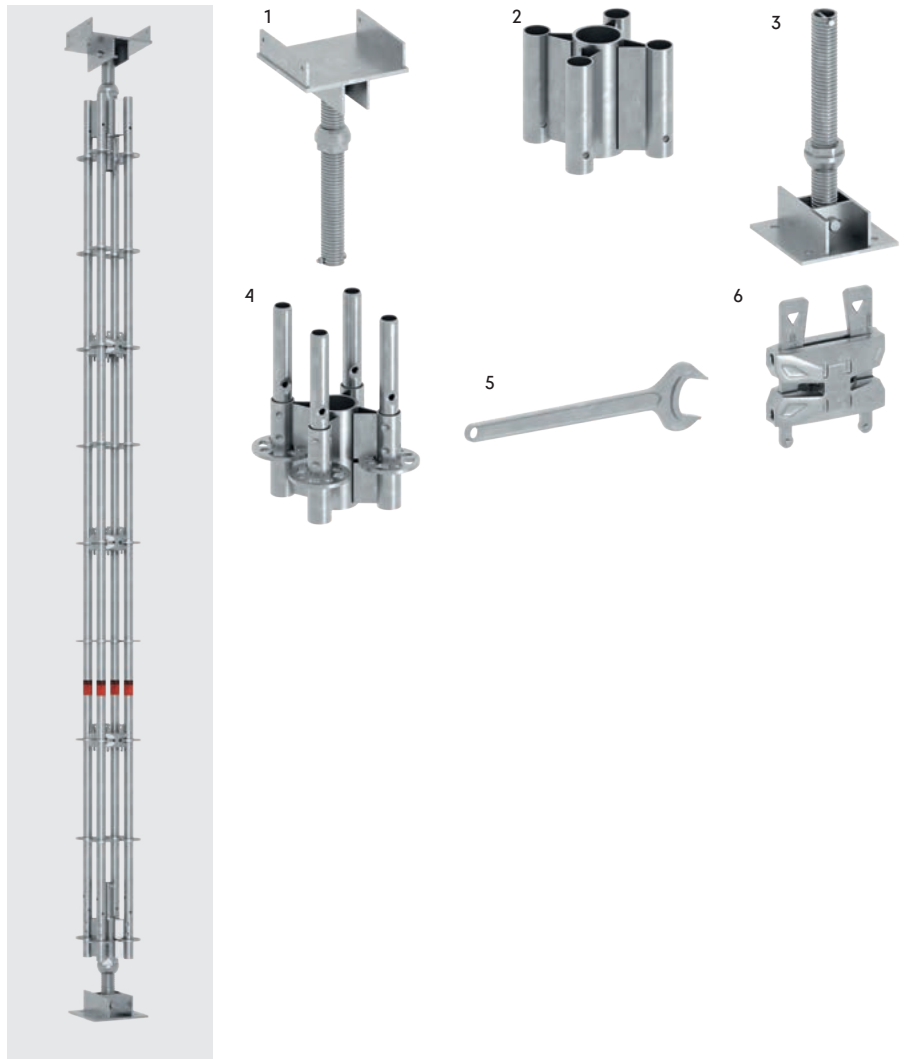


Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Head jack for heavy-duty column		0.70	30.9	25	5312.004 
2	Head part for heavy-duty column		0.21	7.1	100	5312.003 
3	Base plate for heavy-duty column		0.70	24.1	40	5312.001 
4	Base piece for heavy-duty column		0.40	11.5	48	5312.002 
5	Single open-end wrench	95	0.60	7.0	1	5312.005 
6	Wedge-head coupler double			1.2	25	2629.000

Heavy Duty Tower XL

For construction projects where very high loads have to be transmitted at some points, for example in bridge building, shoring of particularly high load capacity is needed. Heavy shoring structures using steel sections are frequently used here. With the Allround Heavy Duty Tower XL, Layher is now offering a modular and system-integrated shoring tower based on standard Allround Scaffolding parts.

With a few lightweight components supplementing the proven Allround Scaffolding construction kit, load capacities in the mega newton class are attained, yet easy to handle for better logistics and assembly – even when no crane is available – and permitting integrated work platforms and accesses within the system.

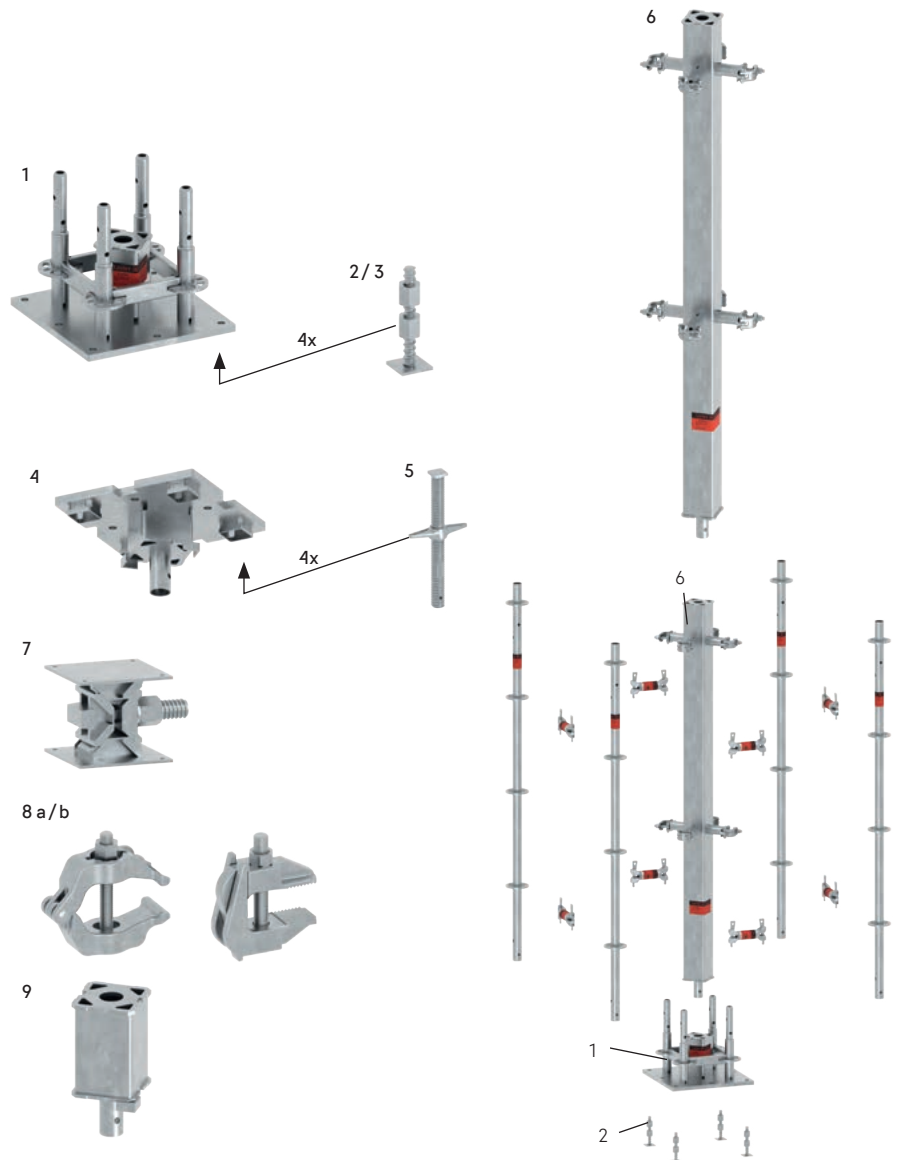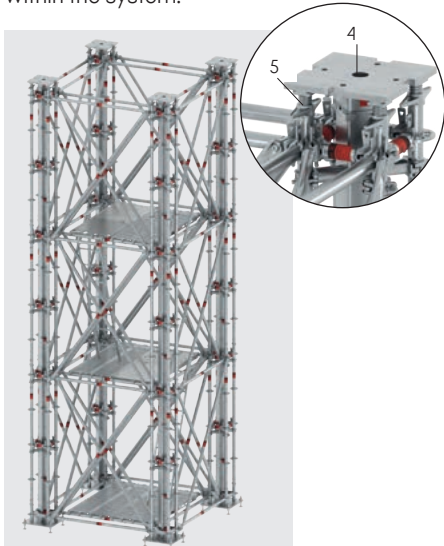

Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Base plate XL		0.45 x 0.45	46.9	8	2612.000
2	Adjustable foot without nut			6.0	20	2612.005
3	Nut 30 x 15 mm	30		1.0	10	2646.231
4	Head plate XL		0.35 x 0.35	21.7	20	2612.002
5	Head jack		0.46	3.0	250	2612.003
6	Section	19	0.50	13.5	50	2612.050
		19	1.00	21.0	15	2612.100
		19	1.50	32.5	20	2612.150
		19	2.00	40.0	8	2612.200
7	Lowering wedge, 1000 kN	80		53.3	12	2612.004
8	Beam clamp					
a	clamping width 5 to 70 mm, with approval Z-8.34-873			1.6	500	5310.001
b	clamping width 12 to 50 mm			1.5	450	5310.000
9	Compensation element		0.20	5.0	50	2612.020

Allround Modular stairtower

Layher has now further optimized the use of the Allround system as a scaffolding stair-tower – assembled from standard scaffolding components and prefabricated stairways with integrated platforms. Thanks to a newly developed 2.21 m long vertical Allround standard, this tower can now be preassembled as required, on the ground and section by section, before being moved by crane to form a tower with unidirectional or alternating stairways. Construction companies benefit in this way from an even easier, faster and above all safer assembly and modification, and from an increased height clearance of 2.20 m that makes its use even more convenient.

The advantages over expensive one-off structures or ad-hoc solutions made of timber are persuasive: rapid and economical assembly, optimum conditions for construction workers thanks to a high degree of safety during use, and exact matching to existing conditions.

For securing of every floor, hinged pins are used.

For the Allround modular stairtower, a type testing for assembly heights up to 115 m is available.

Additional equipment for end module (O-version)

Description	PU [pc.]	Ref. No.
Internal stairway guardrail 1.50 m*	1	1752.012
Standard LW 1.00 m	4	2617.100
O-ledger LW 1.40 m	4	2601.140
O-ledger LW 2.57 m	4	2601.257
Guardrail post 1.30 m	1	2638.400
O-ledger LW 1.90 m with wedge head and U-fork	2	2638.401
O-steel deck LW 2.57 x 0.32 m	2	3890.257

* only for alternating assembly

Stairway module, unidirectional (O-version)

Description	PU [pc.]	Ref. No.
O-comfort stairway 2.57 x 0.65 m	1	2635.257
Stairwell guardrail 1.00 x 0.50 m, WS 19	1	1752.004
Internal stairway guardrail	1	1752.007
Initial standard LW 2.21 m	4	2617.221
O-ledger LW 1.40 m	8	2601.140
O-ledger LW 2.57 m	8	2601.257
Diagonal brace LW 1.40 x 2.00 m	2	2683.140
Diagonal brace LW 2.57 x 2.00 m	2	2683.257
O-steel deck LW 2.57 x 0.32 m	2	3890.257

Compact stairtower

In its standard version, the **compact stair-tower** conforms to German regulations on "stairways for building work" and fits into many stairway recesses in buildings to house one or more families. The stairway can be integrated into Allround work scaffolding. The use of standard parts means that only a few additional parts are needed.



Surface area without brackets:

1.57 x 1.40 m.

Exit clearances:

2.50, 2.75 or 3.00 m possible.

Permissible load capacity: 2.0 kN/m²

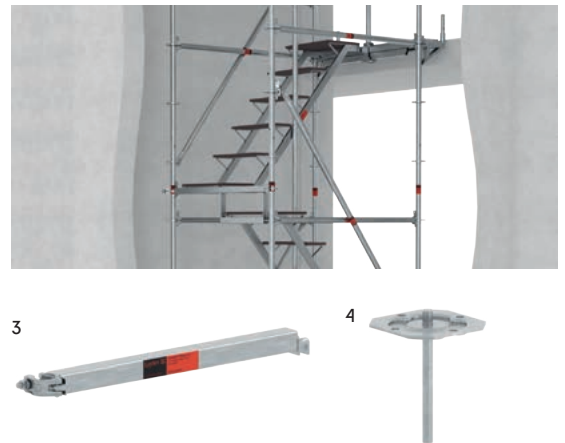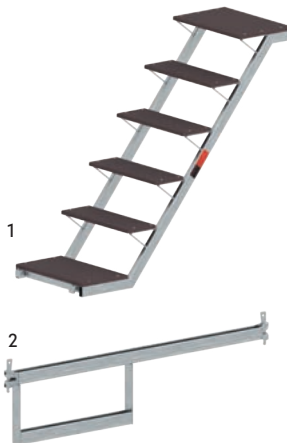

Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	U-stair 1.25 x 0.60 m, steel for 1.57 m bay, step height 0.25 m		1.25 x 0.60	32.5	12	2636.125
2	U-ledger with bearer 1.40 m for compensating 25 cm		1.40	9.0	50	2618.141
3	Compact stairtower ledger 0.79 m	19	0.79	3.4	100	2636.078
4	Adapter plate steel when placing the compact stair tower onto this adapter plate, it is easily possible to lay the screed.		0.15 x 0.15 x 0.20	1.3	100	2636.124

Stairway module, alternating (O-version)

Description	PU [pc.]	Ref. No.
O-comfort stairway 2.57 x 0.64 m	1	2635.257
Internal stairway guardrail WS 19	1	1752.007
Initial standard LW 2.21 m	4	2617.221
O-ledger LW 1.40 m	6	2601.140
O-ledger LW 2.57 m	9	2601.257
Diagonal brace LW 1.40 x 2.00 m	2	2683.140
Diagonal brace LW 2.57 x 2.00 m	2	2683.257


Base

Description	PU [pc.]	Ref. No.
Base plate 60	4	4001.060
Spindle support	4	2602.033




Learn more on YouTube
Allround Modular Stairtower

Alternating (O-version)

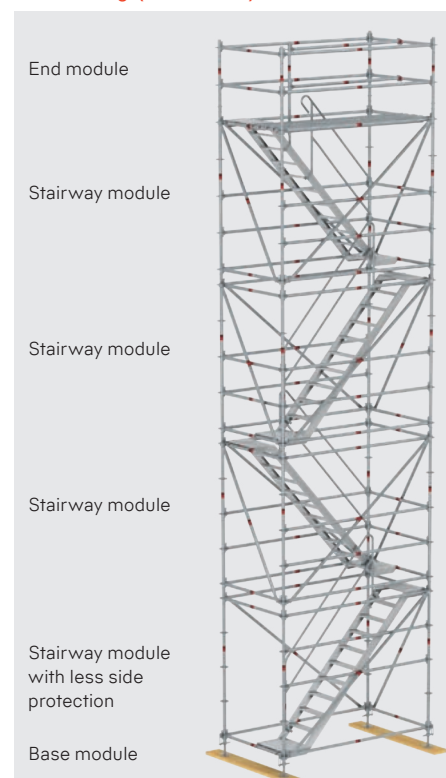

Hollow wall bracket

The **hollow wall bracket** allows concreting work on prefabricated element walls. Forget about timeconsuming timber structures – simply suspend the bracket from the top of the wall and lay system decks on it – that's all.

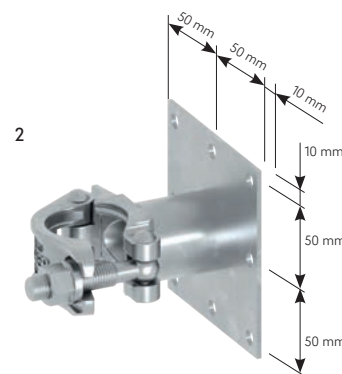

Pos.	Description	WS [mm]	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Hollow wall bracket adapter steel, hot-dip galvanised			2.3	200	2602.400
2	Half-coupler with plate for supporting the scaffolding structure against the wall; 120x120 mm; drillings d=9 mm	19	0.12 x 0.12	1.5	25	4705.019

Fall protection

According to German regulations DGUV 101-038 relating to construction work, a fall protection system must be provided for work areas and walkways on roofs and ceilings with more than 22.5° inclination where the height of the fall is more than 3.00 m. The flat roof guardrail meets these requirements for safeguarding flat roofs. A few parts (e.g. **flat roof guardrail post 1**, **flat roof shift preventer 5**, **flat roof guardrail stiffener 4**, **flat roof ballast 19 kg 8**, **support for flat roof guardrail 7**, **wheel set and flat roof wheel set 3**) in addition to the already provided ledgers enable variable fall protection systems to be assembled quickly and easily. The maximum ledger length between two **flat roof guardrail posts 1** is 3.07 m.



Flat roof without fascias



Flat roof with fascias




Flat roof with high fascias


The **advance guardrail post 11**, the **telescoping assembly guardrail 12** and the **advance end guardrail 13** are used to assembly from secured position.

Extension lengths

Article	L _{min}	L _{max}
Advance guardrail 1.57 / 2.07 m	1.57 m	2.90 m
Advance guardrail 2.07 / 3.07 m	2.07 m	3.70 m




With the **tilting pin adapter 14** two guardrails can be fitted to one guardrail post at a 90° angle to one another.

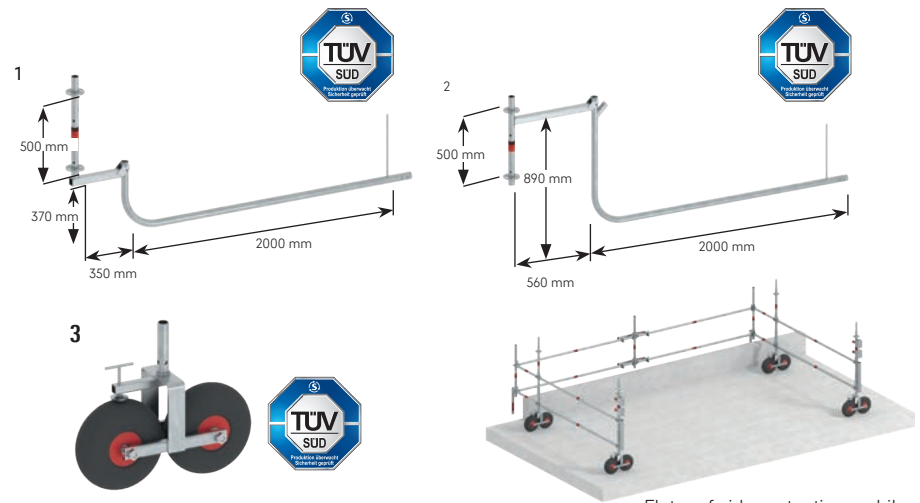


Flat roof side protection mobile

Always comply with instructions for assembly and use.

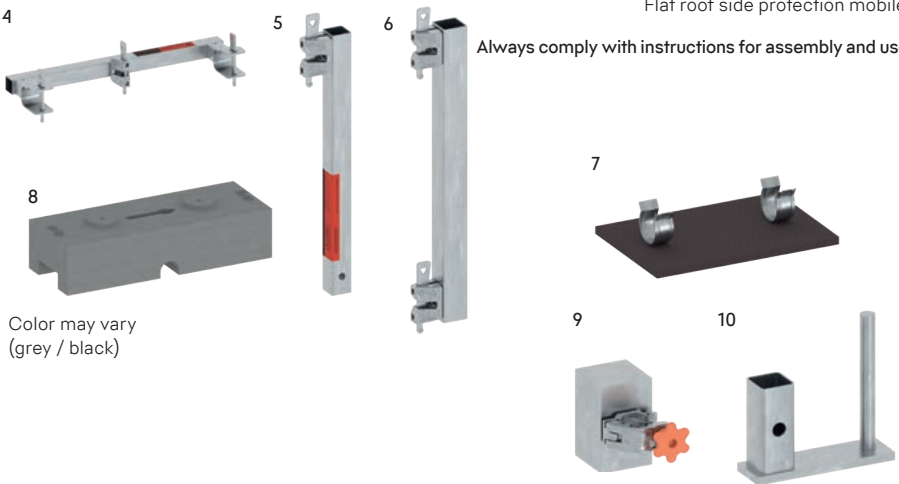


Color may vary
(grey / black)

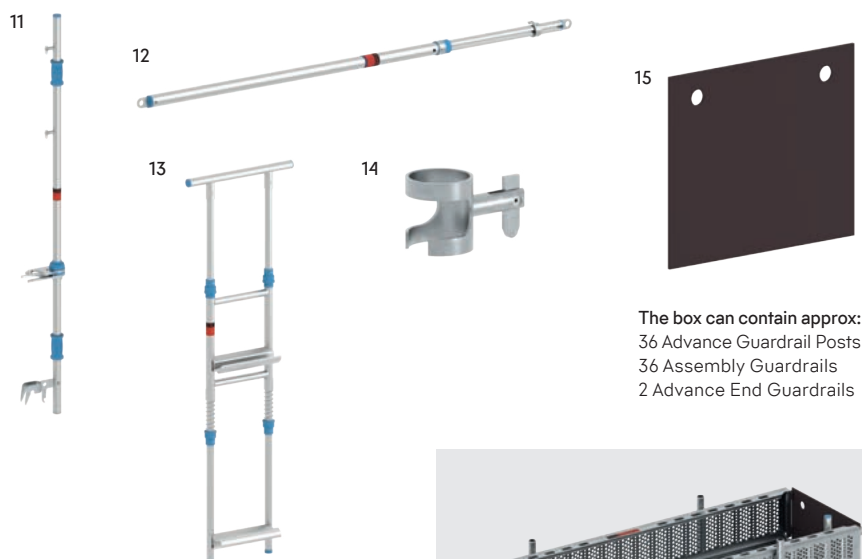

The box can contain approx:
36 Advance Guardrail Posts
36 Assembly Guardrails
2 Advance End Guardrails



Learn more on YouTube
Advance Guardrail System

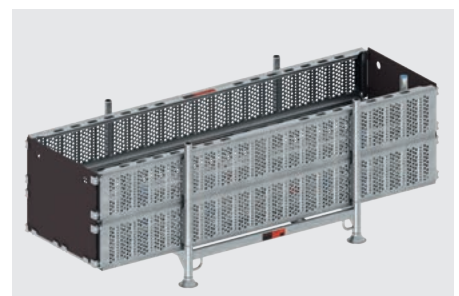



The advance guardrail can be used for the access bay or over several bays.

The instructions for assembly and use of the Allround Scaffolding System must be complied with.



The advance end guardrail is used by placing the bottom U-section on the lower guardrail. The upper U-section must be pulled down to fit into place under the deck ledger. By letting go the advance end guardrail will be secured.

Pos.	Description	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Flat roof guardrail post steel, for low roof edges	2.40	13.1	20	2666.010
2	Flat roof guardrail post, offset steel, for high roof edges	2.70	16.2	20	2666.011
3	Flat roof wheel set	0.60 x 0.50	6.4	20	2666.015
4	Flat roof guardrail stiffener steel	0.60	4.1	60	2666.030
5	Flat roof shift preventer steel	0.50	1.9	200	2666.020
6	Standard lock 0.50 m	0.58	4.0	100	2603.000
7	Support for flat roof guardrail	0.30 x 0.23	0.6	400	2666.050
8	Flat roof ballast 19 kg	0.69 x 0.25 x 0.16	19.0	50	2666.060
9	Ballast (10 kg) steel, hot-dip galvanized with half-coupler. For ballasting of towers refer to the instructions for assembly and use of mobile work platforms		10.0	100	1249.000
10	Flat roof toe board support	0.04 x 0.13 x 0.13	0.7	300	2666.070
11	Advance guardrail post T19 aluminium for two advance guardrails (0.50 m and 1.00 m height), rapid guardrail assembly with a tilting pin	2.36	6.0	50	4031.003
12	Assembly guardrail T19 1.57 / 2.07 m, aluminium, telescopic	1.60	2.9	50	4030.207
	2.07 / 3.07 m, aluminium, telescopic	2.30	3.7	50	4030.307
13	Advance end guardrail aluminium for securing the scaffolding end, for bay width of of 0.73 m to 1.40 m	2.20 x 0.70	9.8	1	4031.000
14	Tilting pin adapter for use of the advance guardrail at outer and inner corners		0.3	10	4031.005
15	End plate for transport box plywood, easy fixation by the u-claws of the scaffolding decks	0.72 x 0.60	2.4	120	5105.072

Safety gear

The PPE safety harness 1 has impressive features:

- Comfortable, padded and ergonomic back support.
- Convenient tool holders and click-locks for easy fastening.
- High operational dependability and absolute freedom from maintenance, plus very simple fastening.
- Operating errors are not possible, as the equipment operates in any position.
- Excellent running, even under grueling working conditions.
- Enormous distribution of forces in the event of a fall.

Before use, visual checks must be performed regularly to ensure correct working order. In accordance with German BGR 198 regulations, all personal safety equipment must be inspected at least once a year by an expert. The maximum permissible period of use for the equipment must not be exceeded.



Pos.	Description	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	PPE safety harness with extension 0.50 m conforms to EN 361		1.8	1	5969.161
2	PPE flex safety rope 2.00 m with fall arrester and snap hook FS 90, as per EN 354 / EN 355, self-shortening to reduce tripping hazards	2.00	1.1	1	5969.501
3	PPE scaffolding construction set Backpack, safety harness and flex-safety rope 2.00 m (use exclusively for scaffolding construction)		3.5	1	5969.171

Railing clamp

According to German regulations DGUV 38 relating to construction work, a fall protection system must be provided for work areas and walkways on roofs and intermediate levels. The **railing clamp 1** meets these requirements for securing of concrete floors and fascias of 16 – 33 cm height and of flat roofs.


The back guard must be made in accordance with applicable regulations from tube / coupler, modular or frame scaffolding. The bay widths can be freely selected, max. 3.07 m long.




When attached to floors, toe boards must be provided, and the vertical stile must be attached over the spindle.



When attached to fascias, no toe boards are required, and the vertical stile must be attached over the spigot.

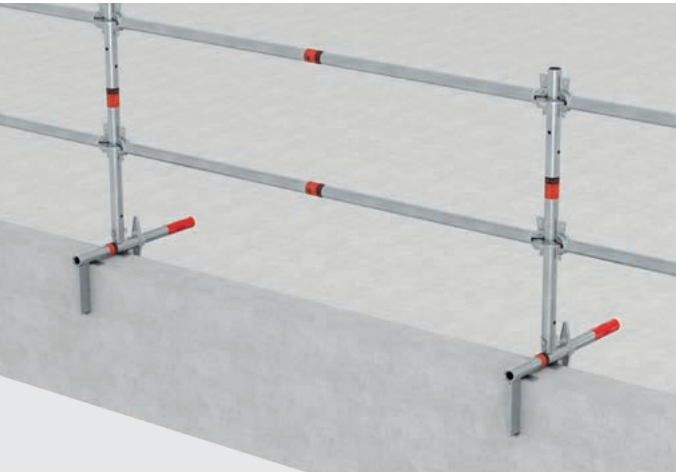

Example for use on fascia

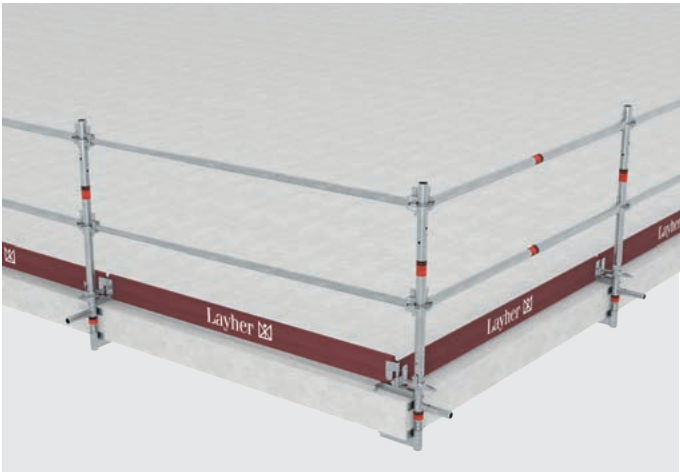

Example for use on floor slab

Pos.	Description	Dimensions L / H x W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Railing clamp Application height max. 100 m above ground; temporary side protection system according to DIN EN 13374 Class A	0.58	7.0	40	4015.100 

Mobile scaffolding, pallets, tools

If scaffolding is made mobile using castors, DIN 4420-3 applies. A structural analysis is generally required for this mobile scaffolding.

Robust **castors 1** with twin brake (it brakes wheel and slewing ring) for various loads, offer a safer mobility of the scaffolding – without high effort.

Tube pallets in square shape (85) 5 or in **rectangular shape (125) 4**. The pallets are open on all sides. Tubes, standards, guardrails, diagonal braces, toe boards are transported and stored with this pallet. The empty pallets, stored permanently in the base frame using pallet posts, can be transported and stored in a space-saving way.


Following can be transported: 80 standards or 99 toe boards or 155 ledgers (pay attention to the perm. load of 1,500 kg) or 28 steel decks 0.32 m.

The **Modular pallet and skeleton box 10/11** can be stacked with Euro pallets. Crane eye-lets at top; an opening allows stacked material to be removed even if several pallets are stacked one above the other. The integrated timber base plate is 30 mm thick and it's nailed onto 50 x 50 mm square timbers.

The three-piece **scaffolding identification pad 14** with carbon copy developed to tag work scaffolding. The right part is the inspection record for your files. Your client gets the carbon. On the back side of the carbon, important application notes are listed.

Identification and prohibition signs for work scaffolding as per DIN EN 12811-1. Suitable **see-through pocket T17 with STOP 16** made of transparent plastic for weather protection.

The **scabbling pick, 600 g reinforced 15** on the hammer head ensures a consistently safe use. The additional hardened inner tube provides a standard breaking strength. In addition, the reinforced scabbling pick has a patented head-stem-connection, which also forgives failures. The orange handle provides good handling, good cushioning and low-fatigue working.




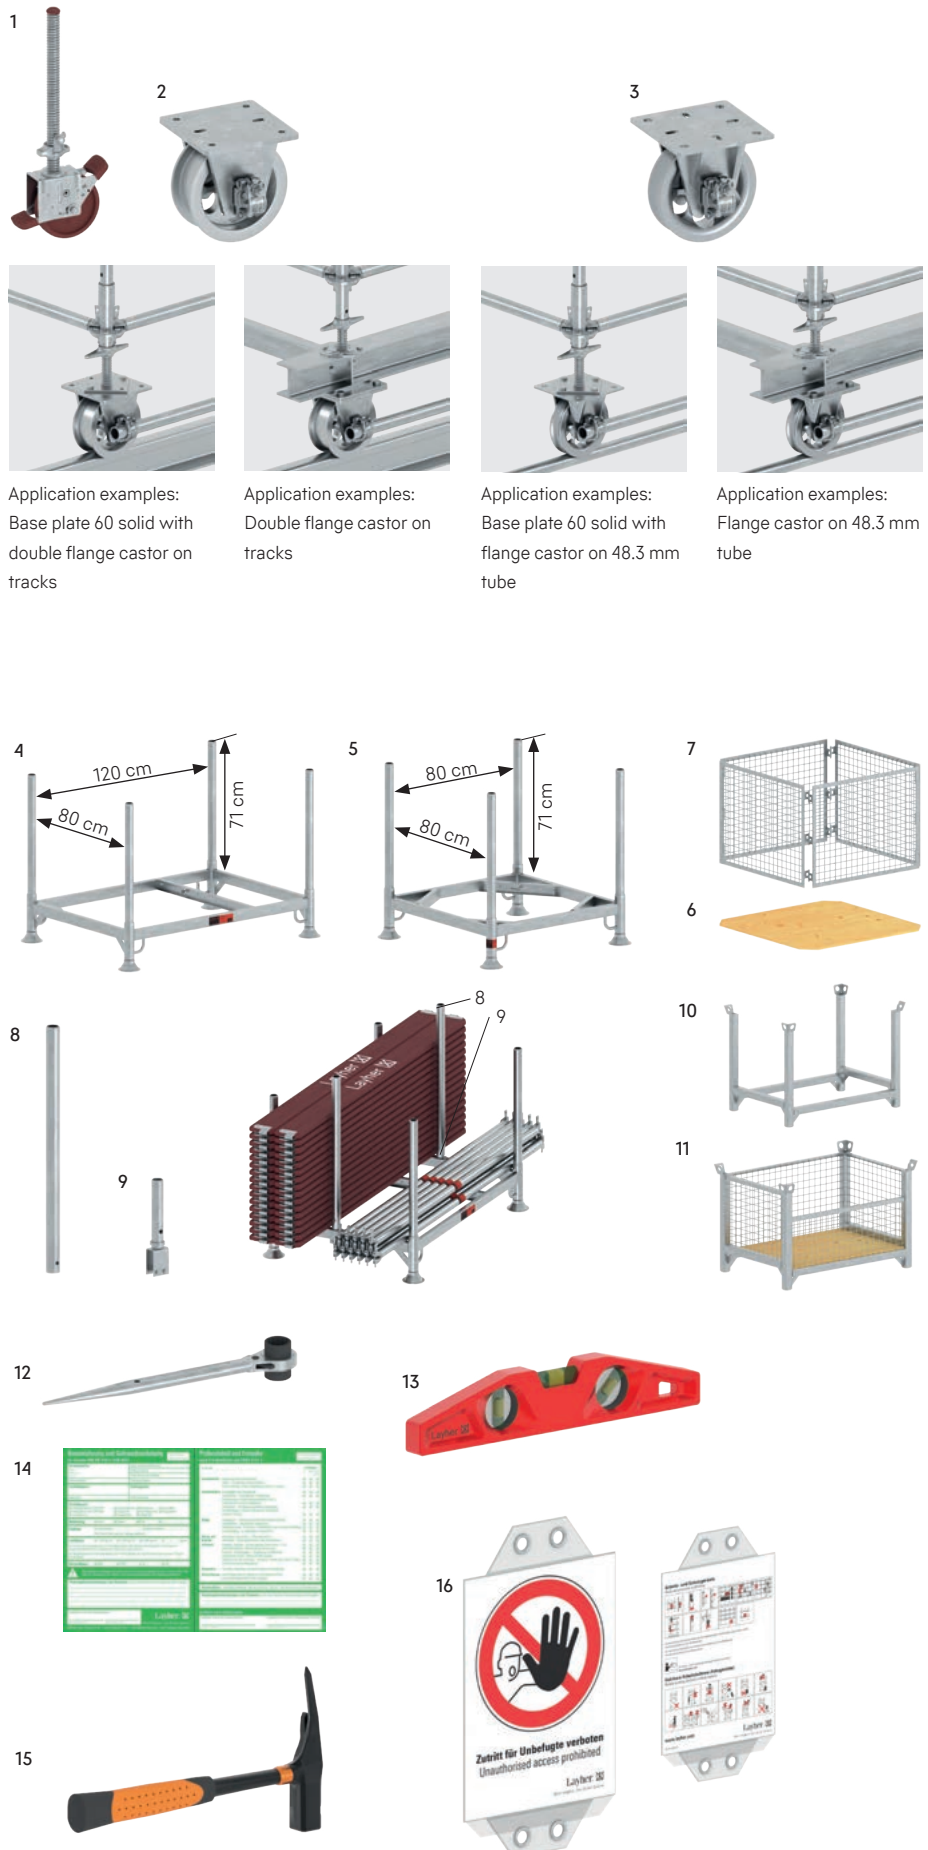


Application examples:
Base plate 60 solid with
double flange castor on
tracks

Application examples:
Double flange castor on
tracks

Application examples:
Base plate 60 solid with
flange castor on 48.3 mm
tube

Application examples:
Flange castor on 48.3 mm
tube

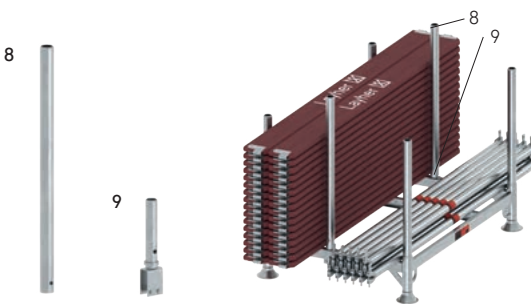

Pos.	Description	WS [mm]	Dimensions L / H × W [m]	Weight approx. [kg]	PU [pc.]	Ref. No.
1	Castor 1000 plastic wheel d=200 mm of polyamide. With base plate, adjustment range 0.30 – 0.60 m, spindle nut lock, with twin brake lever and load centering when braked. Permissible load capacity: 10 kN (≈ 1,000 kg).		d=0.20	6.3	70	1260.201
2	Double flange castor T17 75 mm secured by top plate, hole pattern 170 x 170 mm, d=18 mm, external d=238 mm, internal dia. 200 mm, without brake. Permissible load 31 kN		d=0.238	21.4	40	5216.076 
3	Flange castor for 48.3-mm-tube, secured by top plate, outer hole pattern 170 x 170 mm, d=18 mm, inner hole pattern 126 x 126 x 13 mm (slot hole 13 x 28 mm), without brake. Permissible load: 31 kN		d=0.23	16.8	40	5221.048 
4	Tube pallet 125 steel, hot-dip galvanized, length of push-on tubes: 0.86 m, load 1,500 kg		1.37 × 0.97	32.0	10	5105.125
5	Tube pallet 85 steel, hot-dip galvanized, length of push-on tubes: 0.86 m, load 1,500 kg		0.97 × 0.97	30.8	10	5105.085
6	Timber base plate		0.88 × 0.88	4.1	50	5104.088 
7	Mesh box insert steel, hot-dip galvanized, load 1,500 kg			22.0	10	5104.086 
8	Plug tubes 860 for tube pallet 125 and 85		0.86	2.6	50	6494.751 
9	Spigot for tube pallet to create partitions with the plug tube 860 for stocking of different components		0.31 × 0.06	1.5	200	5105.000 
10			1.20 × 0.80	39.4	5	7042.004
11	Modular skeleton box with timber base plate		1.20 × 0.80	67.2		5113.002
12	Ratchet wrench for VS 19 and 22 mm, with reversing lever for right-hand and left-hand operation, mandrel for ring bolts	19 & 22	0.32	0.6	1	4747.000
13	Magnetic spirit level			0.4	1	4006.666
14	Scaffolding identification pad pad with 50 + 50 pieces (Original + Carbon) with centre perforation and foldover as carbon-block		DIN A4	0.5	1	6344.500 
15	Scabbling pick, 600 g reinforced		0.32	0.8	1	4421.051 
16	See-through pocket for identification pad, 10 pcs. with integrated prohibition sign		0.30 × 0.17	0.3	10 	6344.011

Index

Access ladder T19		
Access ladder T19		
Adapter for ledger connection		
Adapter plate		
Adjustable foot		
Adjustment plate for base plate		
Advance end guardrail		
Advance guardrail post T19		
AGS corner standard LW		
AGS double end guardrail		
AGS double end guardrail		
AGS eaves bracket		
AGS guardrail		
AGS guardrail adapter		
AGS guardrail Fixx		
AGS guardrail Mixx		
AGS guardrail standard LW		
AGS initial standard LW		
AGS interior standard LW		
AGS roof edge protection console		
AGS stair guardrail		
AGS stair guardrail post		
AGS standard LW		
AGS standard LW for roof edge protection		
AGS U-frame LW		
Allround pressure support		
Allround rosette cover		
Allround wall connection unit		
Allround wall tie		
Aluminium O-beam FlexBeam		
Aluminium section beam with wood		
Aluminium TwixBeam		
Aluminium U-beam FlexBeam		
Alu Standard		
Articulated TwixBeam spindle 60		
Assembly aid for system handrail		
Assembly guardrail T19		
Assembly support for O-FlexBeam		
Assembly support for U-FlexBeam		
Ballast (10 kg)		
Base collar		
Base collar 0.26 m		
Base piece for heavy-duty column		
Base plate 60		
Base plate 80		
Base plate 110		
Base plate for heavy-duty column		
Base plate support		
Base plate XL		
Beam clamp		
Beam connector		
Beam connector bolt		
Blind rivet 4.8 x 12 mm		
Bolt 20 x 66 mm		
Bolt 30 x 155 mm		
Bolt d=20 x 113 mm		
Bolt d=20 x 113 mm		
Bolt M20 x 90 mm		
Bracket brace		
Bridging system adapter for heavy-duty column		
Bridging system chord		
Bridging system diagonal anchoring		
27 Bridging system diagonal rod		53
29 Bridging system post		53
65 Bridging system support beam		53
68 Bridging system support element		53
67 Bridging system support for double standard		53
11 Castor 1000		75
71 Castor adapter		65
71 Castor unit for O-FlexBeam		58
15 Castor unit for U-FlexBeam		58
15 Clamping nut		53
39 Clamping plate 70 to 210 mm		57
17 Clamping plate 190 to 330 mm		57
15 Compact stairtower ledger		68
15 Compensation element		67
15 Connector to single rail trolley		63
15 Corner deck, adjustable		27
17 Countersunk bolt M8 x 30 mm		47
15 Cover plate 320, steel, 0.32 m		31
15 Cover plate 320 with hooks, 0.32 m		31
17 Cross head jack 45		11
17 Diagonal brace, aluminium, 2.00 m bay height		23
17 Diagonal brace LW, steel, 0.50 m bay height		23
15 Diagonal brace LW, steel, 1.00 m bay height		23
17 Diagonal brace LW, steel, 1.50 m bay height		23
15 Diagonal brace LW, steel, 2.00 m bay height		23
59 Door lockable		41
35 Double coupler		35
59 Double flange castor T17		75
35 End cap for system handrail tube		47
55 End plate for transport box		71
65 Fastening for crane transport		65
61 Flange castor		75
55 Flat roof ballast 19 kg		71
13 Flat roof guardrail post		71
61 Flat roof guardrail post, offset		71
47 Flat roof guardrail stiffener		71
71 Flat roof shift preventer		71
58 Flat roof toe board support		71
58 Flat roof wheel set		71
71 FlexBeam anchor plate		55
13 FlexBeam anchor plate tube		55
48 FlexBeam cross-connector		57
66 FlexBeam crosspiece		59
11 FlexBeam end bracket adapter		57
11 FlexBeam guardrail adapter		57
11 FlexBeam head jack 60, swivelling		57
66 FlexBeam length adapter		57
57 FlexBeam lift-off preventer bolt		55
67 FlexBeam O-lift-off preventer		55
67 FlexBeam rosette adapter		57
65 FlexBeam spigot		55
65 FlexBeam standard adapter female		55
47 FlexBeam standard adapter male		55
51 FlexBeam standard connector		55
53 FlexBeam suspension shoe		55
57 FlexBeam suspension shoe for standard		55
61 FlexBeam tie rod adapter		55
61 FlexBeam timber beam support		57
37 FlexBeam U-lift-off preventer		55
53 FlexBeam U-lift-off preventer lock		55
53 FW chord		51
53 FW diagonal rod		51

FW double guardrail	51	O-ledger LW, horizontal-diagonal. steel	22
FW endfitting	51	O-ledger steel deck – O-ledger	21
FW guardrail adapter	51	O-ledger steel deck – steel deck	21
FW post	51	O-ledger with wedge head and half-coupler	41
FW post, extended	51	Open ended wrench WS 36	53
FW post, single-side-connection	51	O-Platform stair, aluminium, stair class A acc. to EN 12811-1	41
Guardrail adapter	17	O-robust access deck T9, 0.61 m wide	29
Guardrail, adjustable	21	O-robust deck T9, 0.61 m wide	29
Guardrail fixing device	45	O-side part	43
Guardrail for modular stairway	48	O-stairway stringer 200	43
Guardrail standard	43	O-stairway stringer 500 LW	45
Guardrail T12 with child protection	45	O-stairway stringer 750 LW	45
Half coupler with hanger for door	41	O-stalu deck T21	29
Half-coupler with plate	69	O-Starting stair, aluminium, stair class A acc. to EN 12811-1	41
Half-coupler with toe board pin	33	O-steel deck LW, 0.32 m wide	29
Head jack	67	O-steel deck T9, 0.19 m wide	29
Head jack 45	11	O-steel toe board T18	33
Head jack 60	11	O-toe board, aluminium	33
Head jack for heavy-duty column	66	O-toe board, wood	33
Head part for heavy-duty column	66	Passageway marking 1.50 m with rotating half-couplers	39
Head plate XL	67	Plastic underlay for base plate	11
Hexagon head bolt M12 x 35 mm	53	Plastic wall insert	35
Hinged pin	13	Plug tubes 860	75
Hollow wall bracket adapter	69	Pole ladder, aluminium	43
Initial stair guardrail	41	PPE flex safety rope	72
Initial standard LW	13	PPE safety harness	72
Initial standard LW	15	PPE scaffolding construction set	72
Intermediate jack	65	Protect holder	53
Internal guardrail fixing device	17	Protection net	39
Internal stairway guardrail T12	41	Quick strap fastener	39
Joint for system handrail	47	Railing clamp	73
Landing cover, flat	47	Rapid double coupler	35
Landing cover with nose	47	Rapid swivel coupler	35
LayPLAN CAD	9	Ratchet wrench	75
LayPLAN CLASSIC	9	Ring screw	35
LayPLAN TO RSTAB	9	Riser	47
Lift-off preventer with bolt	48	Rosette	13
Lift-off prevention clamp	43	Rosette with thread	11
Loading and stacking securing profile	65	Scabbling pick, 600 g reinforced	75
Locking nut	53	Scaffolding identification pad	75
Locking nut M8	47	Scaffolding plank	11
Locking pin	13	Scaffolding tube	19
Locking pin for steel plank	31	Section	67
Lowering wedge, 1000 kN	67	Securing pin d=4 mm	51
Magnetic spirit level	75	Securing pin d=4 mm	53
Mesh box insert	75	Securing pin d=4 mm	57
Modular skeleton box with timber base plate	75	Securing pin d=4 mm	61
Nut 30 x 15 mm	51	Securing screw	31
Nut 30 x 15 mm	67	See-through pocket	75
O-access deck	29	Shoring frame pallet	65
O-access deck T9	29	Shoring frame TG 60	65
O-access deck T9, 1.00 m long	29	Shoring spacer with spigot	65
O-board bearer	33	Shoring spigot	65
O-bridging ledger LW	21	Shoring TG 60 frame set	65
O-Comfort stair, aluminium, stair class B acc. to EN 12811-1	41	Single open-end wrench	66
O-console bracket	37	Single Rail Trolley	63
O-corner deck	29	Special bolt M12 x 60 mm	13
O-cover ledger 110 LW	45	Spigot	13
O-lattice beam LW	49	Spigot for O-section	49
O-ledger	19	Spigot for tube pallet	75
O-ledger LW	19	Spigot for U-section	49
O-ledger LW	39	Spindle attachment	11

Spindle support	65	U-console bracket	37
Spring clip	43	U-console bracket LW	37
Spring washer A 8.4 x 18 mm	47	U-console corner deck	27
Stair foot section	43	U-corner deck	27
Stair guardrail 500 T12 with child protection	45	U-corner deck for circular scaffolding 30°	27
Stair-guardrail post	41	U-cover ledger 80 LW	31
Stair guardrail, steel galvanised	41	U-cover ledger 110 LW	45
Stair middle section	43	U-deck 110	31
Stairway guardrail 750, with child protection	45	U-deck for equalisation bay	27
Stairway guardrail adapter	41	U-extension bracket	37
Stairwell guardrail	41	U-interchangeable ledger LW reinforced with 1 claw	21
Standard	13	U-interchangeable ledger LW reinforced with 2 claws	21
Standard lock	13	U-interchangeable ledger LW with 1 claw	21
Standard lock	71	U-interchangeable ledger LW with 2 claws	21
Standard LW	13	U-lattice beam LW	49
Steel plank	31	U-lattice girder	49
Steel plank Xtra-Slim	31	U-ledge	19
Steel pole ladder	43	U-ledge bracket with 1 wedge head	17
Step cover	47	U-ledge bracket with 1 wedge head	37
Stringer for modular stairway	48	U-ledge for lattice beam	49
Support bracket for O-FlexBeam	58	U-ledge LW	33
Support bracket for U-FlexBeam	58	U-ledge LW T14	19
Support for flat roof guardrail	71	U-ledge LW T14	39
Swing door	43	U-ledge reinforced	21
Swivel coupler	35	U-ledge reinforced LW T14	19
Swivel coupler 33.7 mm	35	U-ledge steel deck – O-ledge	21
Swivelling base plate 60	11	U-ledge steel deck – steel deck	21
Swivelling head jack 45	11	U-ledge with bearer	68
System handrail holder	47	U-Lift-off preventer T8	21
System handrail holder, rotating	47	U-Lift-off preventer T8	39
System handrail tube, aluminium, d=42.3 mm, 6.00 m	47	U-lift-off-preventer with toe board pin	17
Telescopic AGS guardrail	17	U-Lock against lift-off T9	21
Telescoping U-system deck	31	Universal U-Lift-off preventer	21
Tilting pin adapter	71	U-Platform stair, aluminium, stair class A acc. to EN 12811-1	41
Timber base plate	75	U-robust access deck, 0.61 m wide, with integrated access	
Tube pallet 85	75	ladder	27
Tube pallet 125	75	U-robust deck, 0.61 m wide	27
TwixBeam beam connector	63	U-robust hatch-type access deck, 0.61 m wide, hatch offset	27
TwixBeam corner connector	63	U-robust hatch-type access deck, 0.61 m wide, hatch offset,	
TwixBeam cross-connector	63	with integrated access ladder	27
TwixBeam H-20 beam clamp	63	U-side part	43
TwixBeam H-20 beam clamp for aluminium insertion beams	63	U-stair	68
TwixBeam insertion beam	61	U-stair head section, U-stair head section	43
TwixBeam Spacer	61	U-stairway stringer 200	43
TwixBeam spindle and standard adapter	63	U-stairway stringer 500 LW	45
TwixBeam Spindle strut	63	U-stairway stringer 750 LW	45
TwixBeam standard connection	63	U-stalu deck 50	25
TwixBeam Stopper	63	U-stalu deck T9, 0.19 m wide	25
U-alu deck, perforated, 0.32 m wide	25	U-stalu deck T9, 0.32 m wide	25
U-aluminium access deck, 0.61 m wide	27	U-stalu deck T21, 0.61 m wide	25
U-aluminium access deck, 0.61 m wide, hatch offset	27	U-Starting stair, aluminium, stair class A acc. to EN 12811-1	41
U-aluminium access deck, 0.61 m wide, hatch offset, with inte-		U-steel deck, 0.19 m wide	25
grated access ladder	27	U-steel deck 45°	27
U-aluminium access deck, 0.61 m wide, with integrated access		U-steel deck LW, 0.32 m wide	25
ladder	27	U-steel toe board T18	33
U-aluminium access deck, 1.00 m long	27	U-toe board, aluminium	33
U-aluminium access deck LC 4, 0.61 m wide	27	U-toe board, wood	33
U-aluminium access deck LC 4, 0.61 m wide, with integrated		U-toe board, wood	39
access ladder	27	U-transition deck 154 with claws	45
U-board bearer	33	U-walkway beam LW	39
U-bridging ledger	21	U-Xtra-N access deck 0.61 m wide, with integrated access	
U-Comfort stair, aluminium, stair class B acc. to EN 12811-1	41	ladder	27

U-Xtra-N deck, 0.32 m wide	25
U-Xtra-N deck, 0.61 m wide	25
Wall shoe for TwixBeam aluminium beam	63
Wall shoe for TwixBeam aluminium insertion beam	63
Wall tie	35
Wedge-head coupler	35
Wedge-head coupler	53
Wedge-head coupler	66
Wedge spindle swivel coupler	11

Customer proximity is a key success factor for Layher – also in a geographical sense. That is why we are present with ideas and solutions wherever our customers need us.

